

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

DATE

REVISIONS

REV

DRAWING NUMBER  
GT-BG90L


REV

*UNCONTROLLED DOCUMENT*

## ELECTRICAL SPECIFICATIONS

D.C. FIRING VOLTAGE (dv/dt<100v/s):	90V ±20%
IMPULSE FIRING VOLTAGE (dv/dt=5kv/us):	MAX 1000V
PEAK IMPULSE CURRENT (8/20us PULSE):	5KA
SURGE LIFE:	100A 500 TIMES (8/20us)
INSULATION RESISTANCE:	MIN 10 <sup>4</sup> MΩ (DC 50V)
INTER-ELECTRODE CAPACITANCE:	MAX 2PF (1KHz)

∅8.20±0.10  
[∅0.323±0.004]

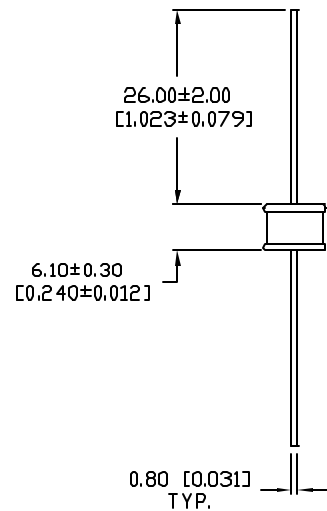

## RESPONSE TIME

SURGE TYPE:	(Rt. MAX.)
1Kv/ms:	1 X 10 <sup>-5</sup> SEC.
1Kv/us:	1 X 10 <sup>-8</sup> SEC.
5Kv/us:	1 X 10 <sup>-9</sup> SEC.

## APPLICABLE ENVIRONMENTAL SPECIFICATIONS

ALL UNITS MEET THE REQUIREMENTS OF MIL-STD 202 AS OUTLINED BELOW

TEST	METHOD	CONDITION	RATING
VIBRATION	204B	C	10-55Hz .06DA
SHOCK	213A	C	100 g
HUMIDITY	103B	B	95% Re. HUMIDITY
TEMPERATURE CYCLING	102A	C	-65°C TO +125°C
BAROMETRIC PRESSURE	105C	B	50,000 ft.
THERMAL SHOCK	107	B	-65°C TO 125°C
SOLDERABILITY	208	B	—

## RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

**LUMEX**  
INCORPORATED

290 E. HELLEN ROAD  
PALATINE, ILLINOIS 60067  
(847) 359-2790

CONFIDENTIAL INFORMATION  
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	3-9-98	DWN:	CHK'D:	APPD:
SCALE:	N/A			

AXIAL LEADED, SURGE ARRESTOR, 90 VDC.

PAGE 1 OF 1

DRAWING NUMBER  
GT-BG90L

REV

*UNCONTROLLED DOCUMENT*

UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±.25mm (±0.010")

DU