

阅读申明

1. 本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
2. 本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
3. 本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
4. 如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".


NTC Inrush Current Limiters Thermistors



NF 08 - 10 - 13 - 15 - 20

(For more details see also the catalog dedicated to this range)

OUTLINE DRAWINGS

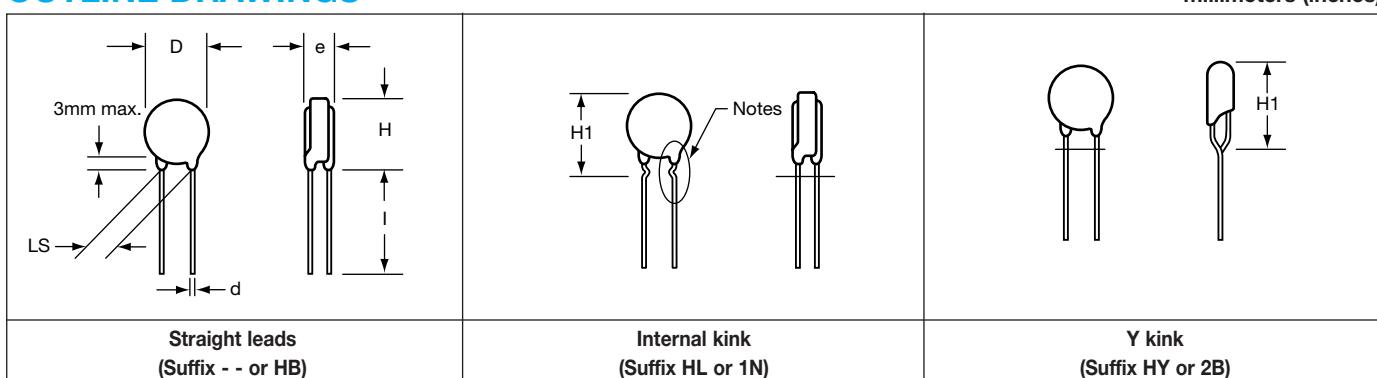

Notes: In case of adding strength to the lead wire from the side, it may occur crack and fragment at a part of pant leg.

* 0.6 mm copper wire and 5.08 mm leads spacing for those two types.

DIMENSIONS millimeters (inches)

Type	D max mm	e max mm	H max mm	H1 max mm	I min mm	d ±0.02 mm (±0.008)	LS ±0.8 mm (±0.030)
NF08*	9.5 (.374)	5.0 (.197)	13.0 (.512)	16.0 (.630)	30 (1.181)	0.6 (.024)	5.08 (.20)
NF08	9.5 (.374)	5.0 (.197)	13.0 (.512)	16.0 (.630)	30 (1.181)	0.8 (.031)	7.62 (.03)
NF10*	11.5 (.453)	5.0 (.197)	15.0 (.591)	18.0 (.709)	30 (1.181)	0.6 (.024)	5.08 (.20)
NF10	11.5 (.453)	5.0 (.197)	15.0 (.591)	18.0 (.709)	30 (1.181)	0.8 (.031)	7.62 (.30)
NF13	15.0 (.591)	6.0 (.236)	18.0 (.709)	22.0 (.866)	30 (1.181)	0.8 (.031)	7.62 (.30)
NF15	17.0 (.669)	6.0 (.236)	20.0 (.787)	24.0 (.945)	30 (1.181)	1.0 (.039)	7.62 (.30)
NF20	22.0 (.866)	6.0 (.236)	25.0 (.984)	29.0 (1.142)	30 (1.181)	1.0 (.039)	7.62 (.30)

GENERAL CHARACTERISTICS

Type	Standard tolerance** %	Maximum operating T°C	Max power 25°C Watts	Thermal dissipation δ_{th} (mW/K)	Thermal time constant τ_C (s)	Heat capacity H (mJ/K)	Packing bulk tape ✓ ✓
NF08*	20	-40 / +200	1.6	8	60	480	✓ ✓
NF08	20	-40 / +200	2.2	11	60	660	✓ ✓
NF10*	20	-40 / +200	2.0	10	75	750	✓ -
NF10	20	-40 / +200	2.6	13	75	975	✓ ✓
NF13	20	-40 / +200	3.2	16	100	1600	✓ ✓
NF15	20	-40 / +200	4.1	20	115	2300	✓ -
NF20	20	-40 / +200	5.0	25	160	4000	✓ -

* 0.6 mm copper wire and 5.08 mm leads spacing for those two types.

** Other tolerances available: L: ±15, X: ±25%

SUFFIXES FOR BULK PACKING (Suffixes for taping: see page 35)

-- straight leads 0.8 or 1 mm wire diameter and 7.62 lead spacing

HB straight leads 0.6 mm wire diameter and 5.08 lead spacing

HL internal kink 0.8 mm or 1 mm wire diameter and 7.62 lead spacing

1N internal kink 0.6 mm wire diameter and 5.08 lead spacing

HY Y kink 0.8 or 1 mm wire diameter and 7.62 lead spacing

2B Y kink 0.6 mm wire diameter and 5.08 lead spacing

HOW TO ORDER

NF13



Type

AA



Inrush Current Limiters

0509



Resistance 5 kΩ

M



Tolerance M (±20%)

--



Suffix

Bulk, Straight Leads
(See illustration above)



Table of Values

NF 08 - 10 - 13 - 15 - 20



cUL	Ceramic Disc ø (mm)	Part number reference T _{ype}	Zero power resistance R _{25°C} (Ω)	Max steady state current I _{ss max 25°C} (A)	Resistance at max current R _{iss max} (Ω)
*	08	NF08AA0509MHB	5.0	2.9	0.20
*		NF08AA0809MHB	8.0	2.3	0.30
*		NF08AA0100MHB	10.0	2.1	0.37
*		NF08AA0150MHB	15.0	1.8	0.50
*		NF08AA0330MHB	33.0	1.3	0.97
*	08	NF08AA0509M - -	5.0	3.4	0.20
*		NF08AA0809M - -	8.0	2.7	0.30
*		NF08AA0100M - -	10.0	2.5	0.37
*		NF08AA0150M - -	15.0	2.1	0.50
*		NF08AA0330M - -	33.0	1.5	0.97
*	10	NF10AA0259MHB	2.5	4.5	0.10
*		NF10AA0409MHB	4.0	3.6	0.16
*		NF10AA0509MHB	5.0	3.3	0.19
*		NF10AA0809MHB	8.0	2.6	0.30
*		NF10AA0100MHB	10.0	2.5	0.34
*		NF10AA0160MHB	16.0	2.0	0.50
*		NF10AA0200MHB	20.0	1.9	0.59
*		NF10AA0250MHB	25.0	1.7	0.69
*		NF10AA0500MHB	50.0	1.4	1.07
*		NF10AA0800MHB	80.0	1.1	1.60
*		NF10AA0121MHB	120.0	1.0	1.90
*	10	NF10AA0259M - -	2.5	5.2	0.10
*		NF10AA0409M - -	4.0	4.1	0.16
*		NF10AA0509M - -	5.0	3.8	0.19
*		NF10AA0809M - -	8.0	3.0	0.30
*		NF10AA0100M - -	10.0	2.8	0.34
*		NF10AA0160M - -	16.0	2.3	0.50
*		NF10AA0200M - -	20.0	2.1	0.59
*		NF10AA0250M - -	25.0	2.0	0.69
*		NF10AA0500M - -	50.0	1.6	1.07
*		NF10AA0800M - -	80.0	1.3	1.60
*		NF10AA0121M - -	120.0	1.2	1.90
*	13	NF13AA0259M - -	2.5	5.7	0.10
*		NF13AA0509M - -	5.0	4.2	0.19
*		NF13AA0709M - -	7.0	3.7	0.24
*		NF13AA0809M - -	8.0	3.6	0.25
*		NF13AA0100M - -	10.0	3.3	0.30
*		NF13AA0150M - -	15.0	2.8	0.41
*		NF13AA0220M - -	22.0	2.3	0.61
*		NF13AA0330M - -	33.0	2.2	0.70
*		NF13AA0400M - -	40.0	2.0	0.80
*		NF13AA0600M - -	60.0	1.9	0.95
*	15	NF15AA0139M - -	1.3	8.9	0.05
*		NF15AA0159M - -	1.5	8.3	0.06
*		NF15AA0259M - -	2.5	6.6	0.09
*		NF15AA0309M - -	3.0	6.1	0.11
*		NF15AA0409M - -	4.0	5.5	0.13
*		NF15AA0509M - -	5.0	4.9	0.17
*		NF15AA0609M - -	6.0	4.7	0.19
*		NF15AA0709M - -	7.0	4.3	0.22
*		NF15AA0809M - -	8.0	4.2	0.24
*		NF15AA0100M - -	10.0	3.7	0.30
*		NF15AA0120M - -	12.0	3.5	0.33
*		NF15AA0160M - -	16.0	3.0	0.44
*		NF15AA0200M - -	20.0	3.1	0.43
*		NF15AA0250M - -	25.0	2.8	0.53
*		NF15AA0330M - -	33.0	2.5	0.66
*		NF15AA0400M - -	40.0	2.3	0.80
*		NF15AA0470M - -	47.0	2.3	0.74
*	20	NF20AA0259M - -	2.5	7.8	0.08
*		NF20AA0409M - -	4.0	6.4	0.13
*		NF20AA0509M - -	5.0	5.9	0.15
*		NF20AA0100M - -	10.0	4.3	0.28
*		NF20AA0150M - -	15.0	4.0	0.32
*		NF20AA0330M - -	33.0	3.1	0.52

* cL/L approval (File E167822)

- Electrical performances for suffixes HL and HY are identical to the suffix - -.
- Electrical performances for suffixes 1N and 2B are identical to the suffix HB

NTC Inrush Current Limiters Thermistors Application Guide




1 – HOW TO DETERMINE THE MAXIMUM STEADY STATE CURRENT OF NF THERMISTORS?

- If the ambient temperature is 25°C: the current is given in table page 30.
- If the ambient temperature is different from 25°C: the current at 25°C must be derated as specified in the graph below.

Example: maximum steady state current of NF13AA0100M at 60°C ambient:

$$I_{SS\max25} \times 0.9 = 3.0 \text{ A.}$$

Derating of maximum steady state current with ambient temperature

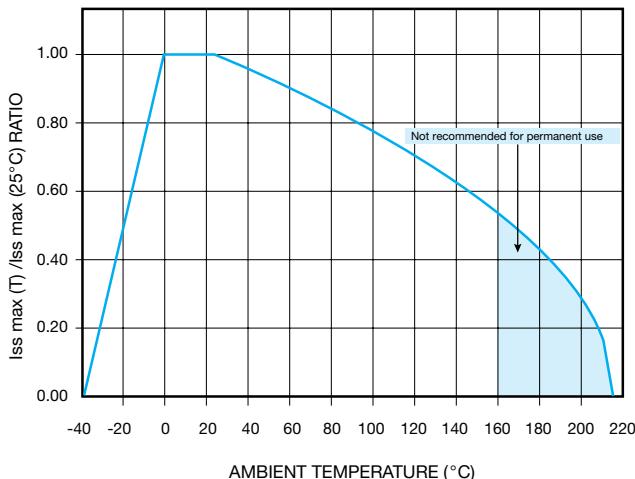

2 – HOW TO CALCULATE THE WORKING TEMPERATURE OF NF THERMISTOR?

Example: NF08AA0330M

$$I_{SS} = 0.2 \text{ A}, \quad T_{\text{ambient}} = 25^\circ\text{C}$$

- From the graph V(I) page 32, we find $V_{SS} = 2.2 \text{ V}$ therefore, $R_{SS} = 11 \Omega$
- From the graph R(T), page 32, at $R = 11 \Omega$, we find $T \pm 65^\circ\text{C}$

3 – HOW TO CALCULATE THE WORKING POINT OF NF THERMISTOR AT A DIFFERENT AMBIENT TEMPERATURE THAN 25°C?

Example: NF13AA0100M

$$I_{SS} = 3 \text{ A}, \quad T_{\text{ambient}} = T_A = 60^\circ\text{C}$$

$$R_T I_{SS}^2 = \delta (T - T_A) \text{ and thus}$$

$$T = \frac{R_T I_{SS}^2}{\delta} + T_A$$

- As R_T depends on T , this equation is quite complex to be solved by an algebraic way. The quickest manner to solve it is to operate by iterations:

for NF13, $\delta = 16 \text{ mW/K}$ (see page 29)

therefore, the equation becomes:

$$T = 562.5 R_T + 60$$

from the R_T curve page 33 we find R_T starting from T :

T (°C)	$R_T (\Omega)$	\Rightarrow	$562.5 R_T + 60$ (°C)
185	0.28		217
190	0.26		206
195	0.24		195
200	0.22		184

The working temperature of this NF thermistor is about 195°C when operating under $I_{SS} = 3 \text{ A}$ and $T_A = 60^\circ\text{C}$ (this temperature is the one for which we have $T = 562.5 R_T + 60$).


Important: A discrepancy may exist between practice and theory due to the tolerance of the thermistor ($\pm 20\%$ usually).

NTC Inrush Current Limiters Thermistors




Voltage-Current and Resistance-Temperature Characteristics

**TYPICAL VOLTAGE/CURRENT
CHARACTERISTICS FOR TYPE NF08**

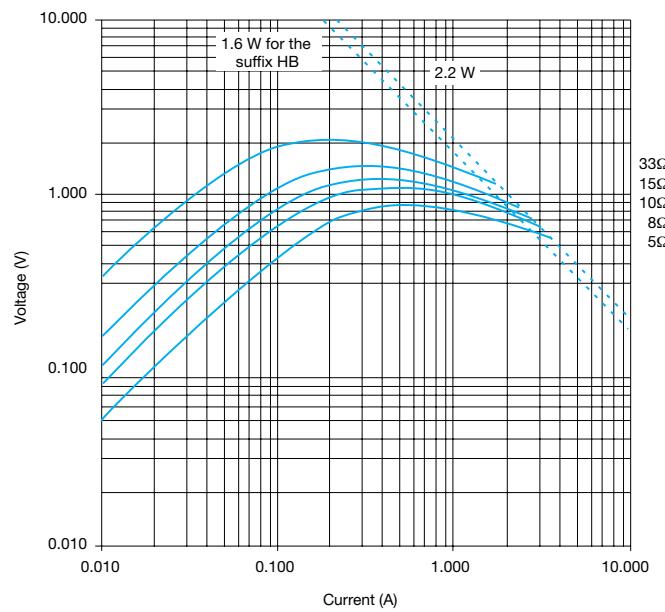

**TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTICS FOR TYPE NF08**

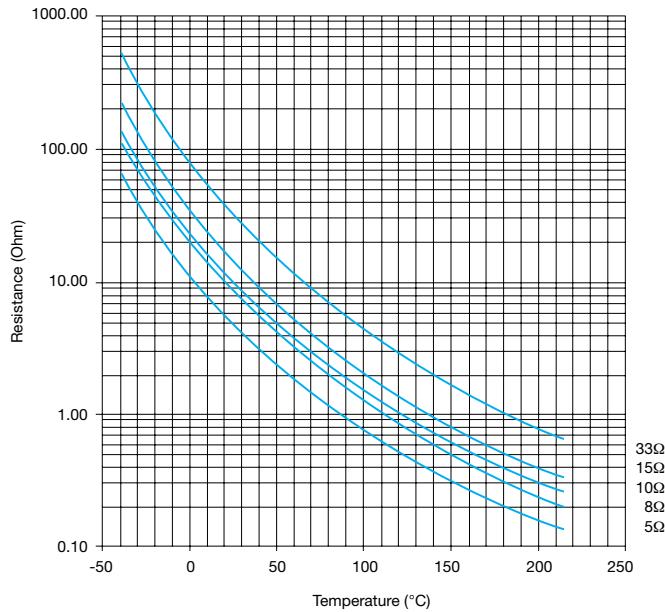


NTC Inrush Current Limiters Thermistors




Voltage-Current and Resistance-Temperature Characteristics


TYPICAL VOLTAGE/CURRENT CHARACTERISTICS FOR TYPE NF10

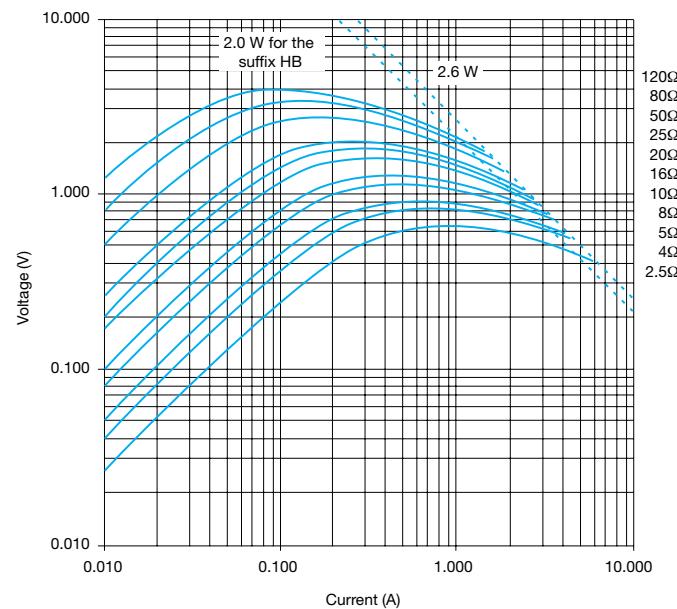


TYPICAL VOLTAGE/CURRENT CHARACTERISTICS FOR TYPE NF13

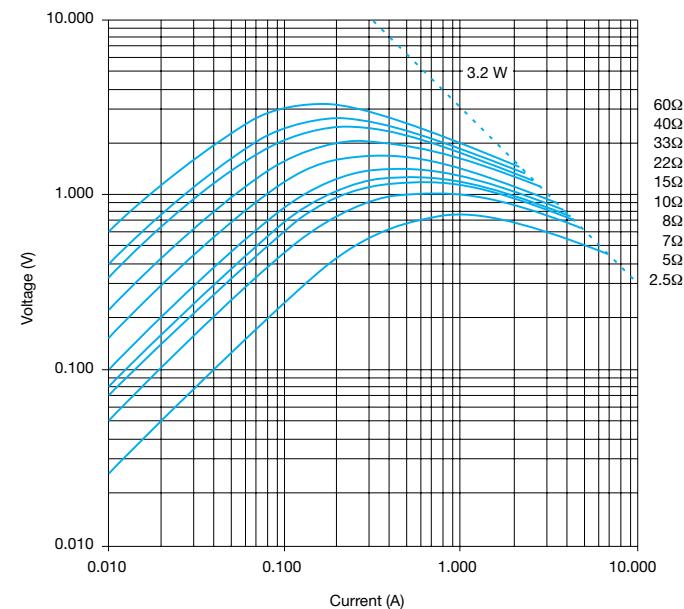

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTICS FOR TYPE NF10

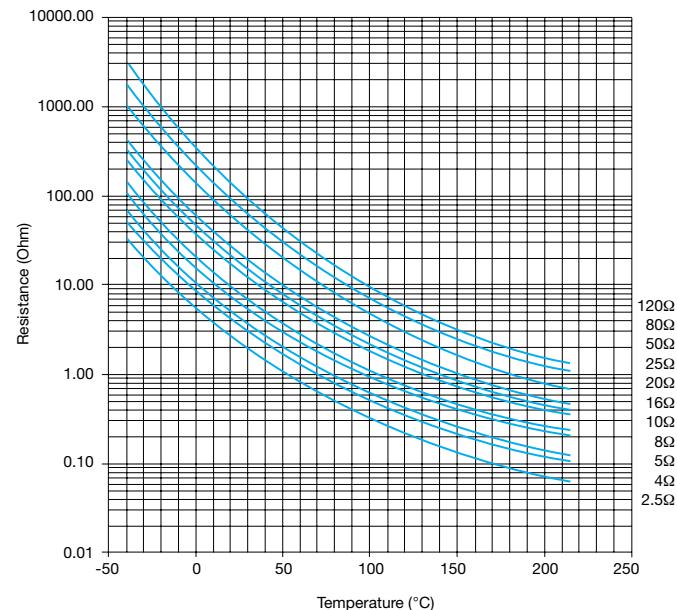

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTICS FOR TYPE NF13

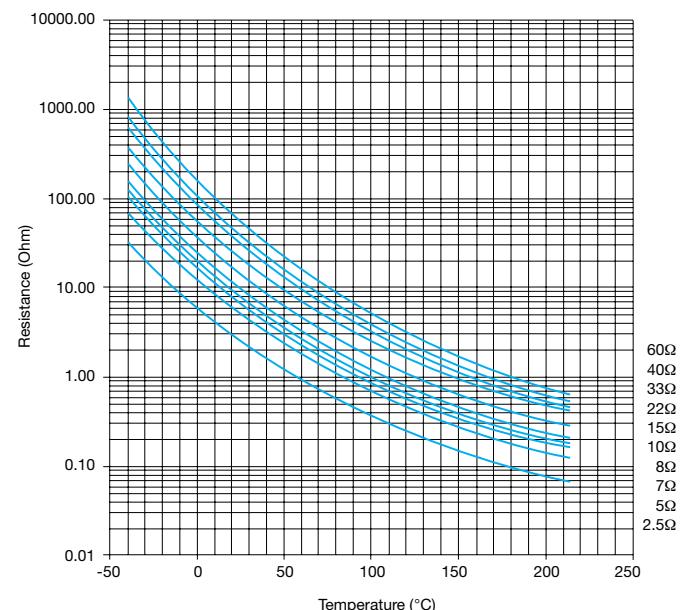


NTC Inrush Current Limiters Thermistors




Voltage-Current and Resistance-Temperature Characteristics


TYPICAL VOLTAGE/CURRENT
CHARACTERISTICS FOR TYPE NF15

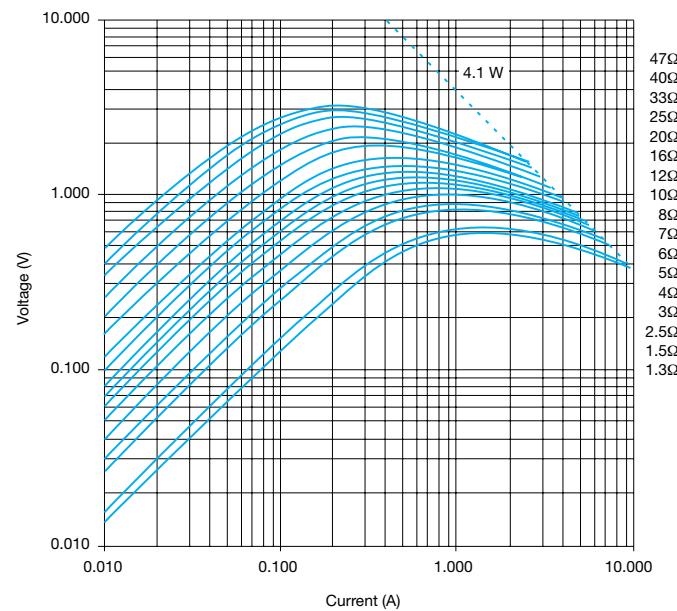


TYPICAL VOLTAGE/CURRENT
CHARACTERISTICS FOR TYPE NF20

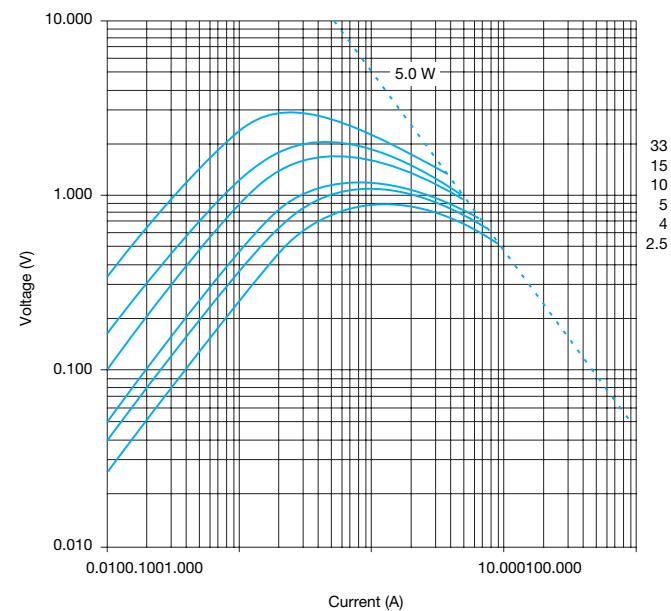

TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTICS FOR TYPE NF15

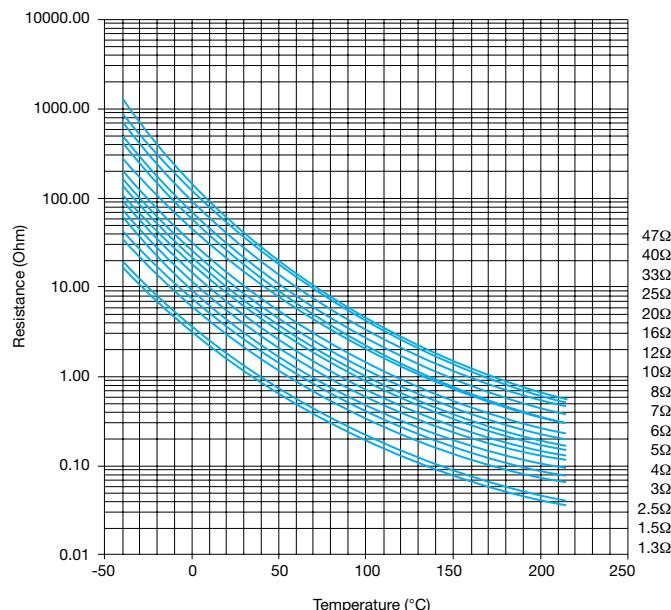

TYPICAL RESISTANCE/TEMPERATURE
CHARACTERISTICS FOR TYPE NF20

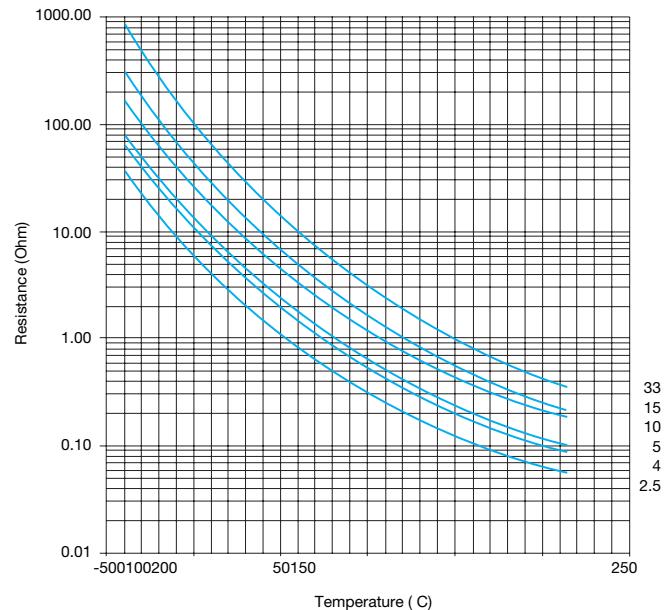

Packaging for Automatic Insertion



NTC Disc Thermistors / NF Series

PACKAGING AND KINK SUFFIXES

The following types can be ordered on tape either in AMMOPACK (fan folder) or on REEL in accordance with IEC 286-2.

Types	Straight		NF08		"Y" Kink	
Leads			Internal Kink			
DIMENSIONS: millimeters (inches)				Notes		
Packaging	AMMOPACK	REEL	AMMOPACK	REEL	AMMOPACK	REEL
Ho = 16	DA	DB	DQ	DR	D7	D5
Ho = 19.5	DC	DD	DS	DT	D8	D6

Types	Straight		NF08 / 10 / 13		"Y" Kink	
Leads			Internal Kink			
DIMENSIONS: millimeters (inches)				Notes		
Packaging	AMMOPACK	REEL	AMMOPACK	REEL	AMMOPACK	REEL
Ho = 16	EA	EN	EC	EF	EQ	ER
Ho = 19.5	EB	ED				

PACKAGING QUANTITIES

Type	AMMOPACK	REEL	BULK
NF08* (5.08)	1000	1000	450
NF08 (7.62)	750	750	
NF10* (5.08)	750	750	450
NF10 (7.62)			
NF13 (7.62)	750	750	400
NF15 (7.62)	—	—	250
NF20 (7.62)	—	—	150