

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Complementary low voltage transistor

Features

- Products are pre-selected in DC current gain

Application

- General purpose

Description

These epitaxial planar transistors are mounted in the SOT-32 plastic package. They are designed for audio amplifiers and drivers utilizing complementary or quasi-complementary circuits. The NPN types are the BD135 and BD139, and the complementary PNP types are the BD136 and BD140.

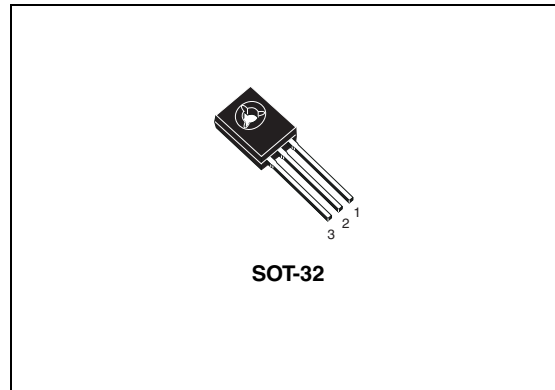


Figure 1. Internal schematic diagram

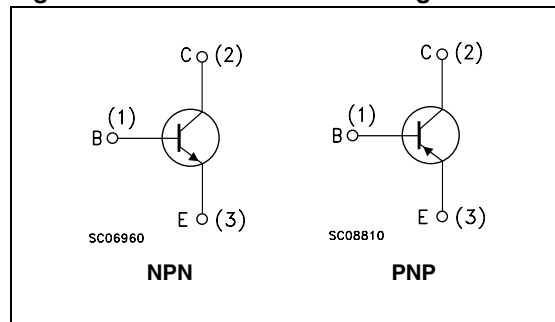


Table 1. Device summary

| Order codes | Marking | Package | Packaging |
|-------------|----------|---------|-----------|
| BD135 | BD135 | SOT-32 | Tube |
| BD135-16 | BD135-16 | | |
| BD136 | BD136 | | |
| BD136-16 | BD136-16 | | |
| BD139 | BD139 | | |
| BD139-10 | BD139-10 | | |
| BD139-16 | BD139-16 | | |
| BD140 | BD140 | | |
| BD140-10 | BD140-10 | | |
| BD140-16 | BD140-16 | | |

Contents

| | | |
|----------|---|----------|
| 1 | Electrical ratings | 3 |
| 2 | Electrical characteristics | 4 |
| | 2.1 Electrical characteristics (curves) | 5 |
| 3 | Package mechanical data | 6 |
| 4 | Revision history | 8 |

1 Electrical ratings

Table 2. Absolute maximum ratings

| Symbol | Parameter | Value | | | | Unit |
|-----------|--|------------|-------|-------|-------|------|
| | | NPN | | PNP | | |
| | | BD135 | BD139 | BD136 | BD140 | |
| V_{CBO} | Collector-base voltage ($I_E = 0$) | 45 | 80 | -45 | -80 | V |
| V_{CEO} | Collector-emitter voltage ($I_B = 0$) | 45 | 80 | -45 | -80 | V |
| V_{EBO} | Emitter-base voltage ($I_C = 0$) | 5 | | -5 | | V |
| I_C | Collector current | 1.5 | | -1.5 | | A |
| I_{CM} | Collector peak current | 3 | | -3 | | A |
| I_B | Base current | 0.5 | | -0.5 | | A |
| P_{TOT} | Total dissipation at $T_c \leq 25\text{ °C}$ | 12.5 | | | | W |
| P_{TOT} | Total dissipation at $T_{amb} \leq 25\text{ °C}$ | 1.25 | | | | W |
| T_{stg} | Storage temperature | -65 to 150 | | | | °C |
| T_j | Max. operating junction temperature | 150 | | | | °C |

Table 3. Thermal data

| Symbol | Parameter | Max value | Unit |
|----------------|-------------------------------------|-----------|------|
| $R_{thj-case}$ | Thermal resistance junction-case | 10 | °C/W |
| $R_{thj-amb}$ | Thermal resistance junction-ambient | 100 | °C/W |

2 Electrical characteristics

($T_{\text{case}} = 25\text{ °C}$ unless otherwise specified)

Table 4. On/off states

| Symbol | Parameter | Polarity | Test conditions | Value | | | Unit |
|-----------------------------|---|----------|---|----------------|------|-------------|--------------------------------|
| | | | | Min. | Typ. | Max. | |
| I_{CBO} | Collector cut-off current ($I_{\text{E}}=0$) | NPN | $V_{\text{CB}} = 30\text{ V}$ $V_{\text{CB}} = 30\text{ V}, T_{\text{C}} = 125\text{ °C}$ | | | 0.1 10 | μA μA |
| | | PNP | $V_{\text{CB}} = -30\text{ V}$ $V_{\text{CB}} = -30\text{ V}, T_{\text{C}} = 125\text{ °C}$ | | | -0.1 -10 | μA μA |
| I_{EBO} | Emitter cut-off current ($I_{\text{C}}=0$) | NPN | $V_{\text{EB}} = 5\text{ V}$ | | | 10 | μA |
| | | PNP | $V_{\text{EB}} = -5\text{ V}$ | | | -10 | μA |
| $V_{\text{CEO(sus)}}^{(1)}$ | Collector-emitter sustaining voltage ($I_{\text{B}}=0$) | NPN | $I_{\text{C}} = 30\text{ mA}$ BD135 BD139 | 45 80 | | | V V |
| | | PNP | $I_{\text{C}} = -30\text{ mA}$ BD136 BD140 | -45 -80 | | | V V |
| $V_{\text{CE(sat)}}^{(1)}$ | Collector-emitter saturation voltage | NPN | $I_{\text{C}} = 0.5\text{ A}, I_{\text{B}} = 0.05\text{ A}$ | | | 0.5 | V |
| | | PNP | $I_{\text{C}} = -0.5\text{ A}, I_{\text{B}} = -0.05\text{ A}$ | | | -0.5 | V |
| $V_{\text{BE}}^{(1)}$ | Base-emitter voltage | NPN | $I_{\text{C}} = 0.5\text{ A}, V_{\text{CE}} = 2\text{ V}$ | | | 1 | V |
| | | PNP | $I_{\text{C}} = -0.5\text{ A}, V_{\text{CE}} = -2\text{ V}$ | | | -1 | V |
| $h_{\text{FE}}^{(1)}$ | DC current gain | NPN | $I_{\text{C}} = 5\text{ mA}, V_{\text{CE}} = 2\text{ V}$ $I_{\text{C}} = 150\text{ mA}, V_{\text{CE}} = 2\text{ V}$ $I_{\text{C}} = 0.5\text{ A}, V_{\text{CE}} = 2\text{ V}$ | 25 40 25 | | 250 | |
| | | PNP | $I_{\text{C}} = -5\text{ mA}, V_{\text{CE}} = -2\text{ V}$ $I_{\text{C}} = -150\text{ mA}, V_{\text{CE}} = -2\text{ V}$ $I_{\text{C}} = -0.5\text{ A}, V_{\text{CE}} = -2\text{ V}$ | 25 40 25 | | 250 | |
| $h_{\text{FE}}^{(1)}$ | h_{FE} groups | NPN | $I_{\text{C}} = 150\text{ mA}, V_{\text{CE}} = 2\text{ V}$ BD139-10 BD135-16/BD139-16 | 63 100 | | 160 250 | |
| | | PNP | $I_{\text{C}} = -150\text{ mA}, V_{\text{CE}} = -2\text{ V}$ BD140-10 BD136-16/BD140-16 | 63 100 | | 160 250 | |

1. Pulsed: pulse duration = 300 μs , duty cycle 1.5%

2.1 Electrical characteristics (curves)

Figure 2. Safe operating area


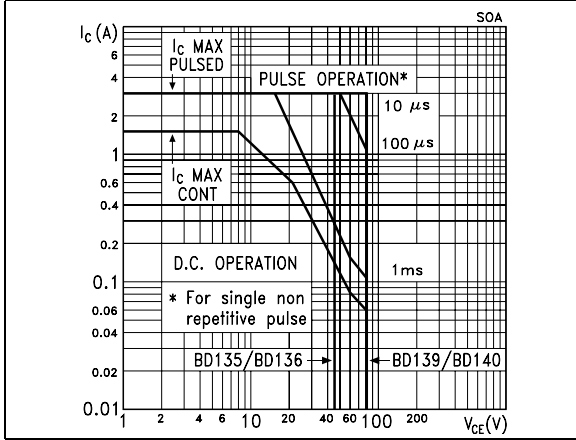


Figure 3. Derating

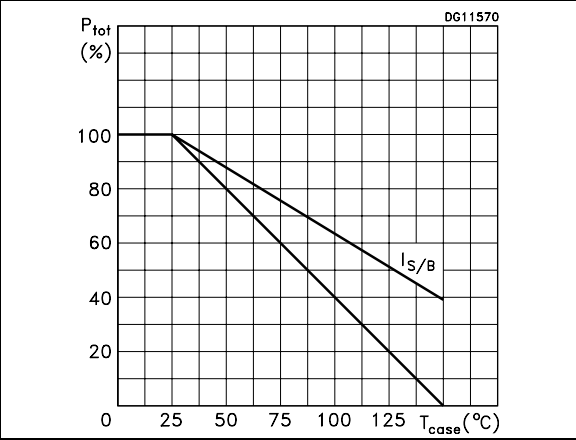


3 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com

SOT-32 (TO-126) MECHANICAL DATA

| DIM. | mm. | | |
|------|------|------|-------|
| | MIN. | TYP | MAX. |
| A | 2.4 | | 2.9 |
| B | 0.64 | | 0.88 |
| B1 | 0.39 | | 0.63 |
| D | 10.5 | | 11.05 |
| E | 7.4 | | 7.8 |
| e | 2.04 | 2.29 | 2.54 |
| e1 | 4.07 | 4.58 | 5.08 |
| L | 15.3 | | 16 |
| P | 2.9 | | 3.2 |
| Q | | 3.8 | |
| Q1 | 1 | | 1.52 |
| H2 | | 2.15 | |
| I | | 1.27 | |

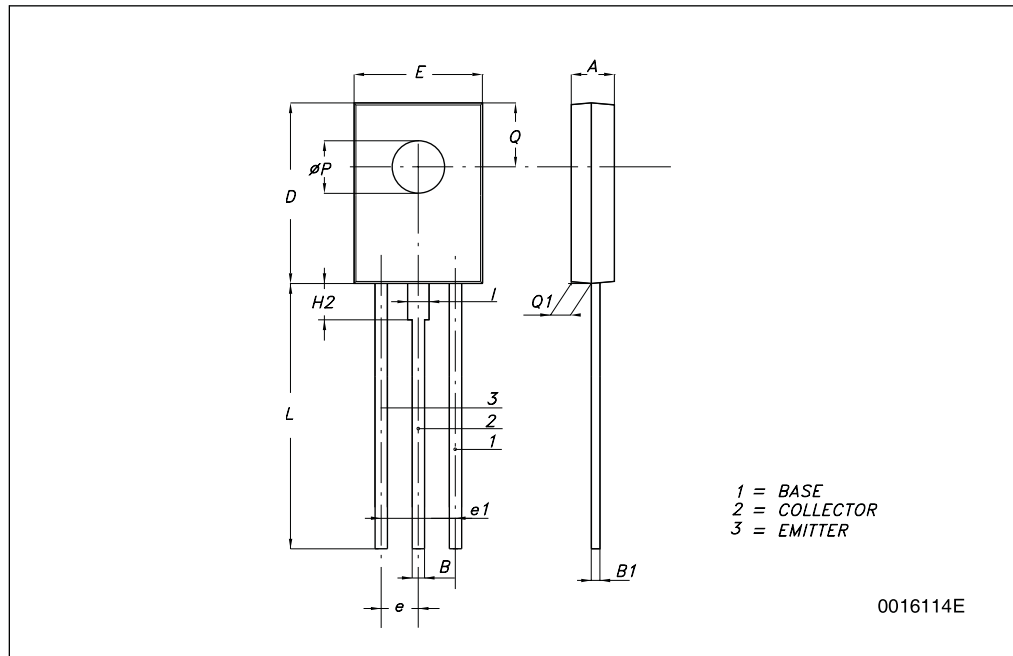

4 Revision history

Table 5. Document revision history

| Date | Revision | Changes |
|-------------|----------|-----------------------------------|
| 16-Sep-2001 | 4 | |
| 22-May-2008 | 5 | Mechanical data has been updated. |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

