

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



# Automotive StaticGuard

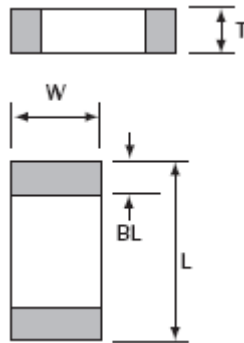



Size (EIA)	0402	0603	0805
<b>L</b>	1.00 ±0.10 (0.040 ±0.004)	1.60±.15 (0.063±0.006)	2.01±.20 (0.079±0.008)
<b>W</b>	0.50 ±0.10 (0.020 ±0.004)	0.80±0.15 (0.032±0.006)	1.25±0.20 (0.049±0.008)
<b>T</b>	0.60 Max. (0.024 Max.)	0.90 Max (0.035 Max.)	1.02 Max (0.040 Max.)
<b>BL</b>	0.25 ±0.15 (0.010 ±0.006)	0.35±0.15 (0.014±0.006)	0.71 Max (0.028 Max)

<u>VC</u>	<u>AS</u>	<u>06</u>	<u>LC</u>	<u>18</u>	<u>X</u>	<u>500</u>	<u>R</u>	<u>P</u>
Varistor Chip	Series AS = Automotive	Case 04=0402 06 = 0603 08 = 0805	Low Cap Design	Working Voltage 18=18VDC	Energy Rating A=0.1J V=0.02J X=0.05J	Clamping Voltage 500=50V	Package D=1000 R=4000 T=1000 W=0402 10000	Termination P=Ni/Sn

AVX Part Number	Working Voltage (DC)	Working Voltage (AC)	Clamping Voltage	Test Current For V <sub>c</sub>	Maximum Leakage Current	Transient Energy Rating	Peak Current Rating	Typical Capacitance	Case Size	Jump Start	Power Dissipation
VCAS04LC18V500	≤ 18	≤ 14	50	1	10	0.02	15	40	0402	27.5	0.0004
VCAS06LC18X500	≤ 18	≤ 14	50	1	10	0.05	30	50	0603	27.5	0.001
VCAS08LC18A500	≤ 18	≤ 14	50	1	10	0.10	30	80	0805	27.5	0.002

**V<sub>w</sub>(DC)** DC Working Voltage [V]  
**V<sub>w</sub>(AC)** AC Working Voltage [V]  
**V<sub>c</sub>** Clamping Voltage [V @ 1mA]  
**I<sub>vc</sub>** Test Current for V<sub>c</sub>

**I<sub>L</sub>** Maximum leakage current at the working voltage [μA]  
**E<sub>t</sub>** Transient Energy Rating [J, 10x1000μS]  
**I<sub>p</sub>** Peak Current Rating [A, 8x20μS]  
**Cap** Typical capacitance [pF] @ frequency specified and 0.5V<sub>RMS</sub>

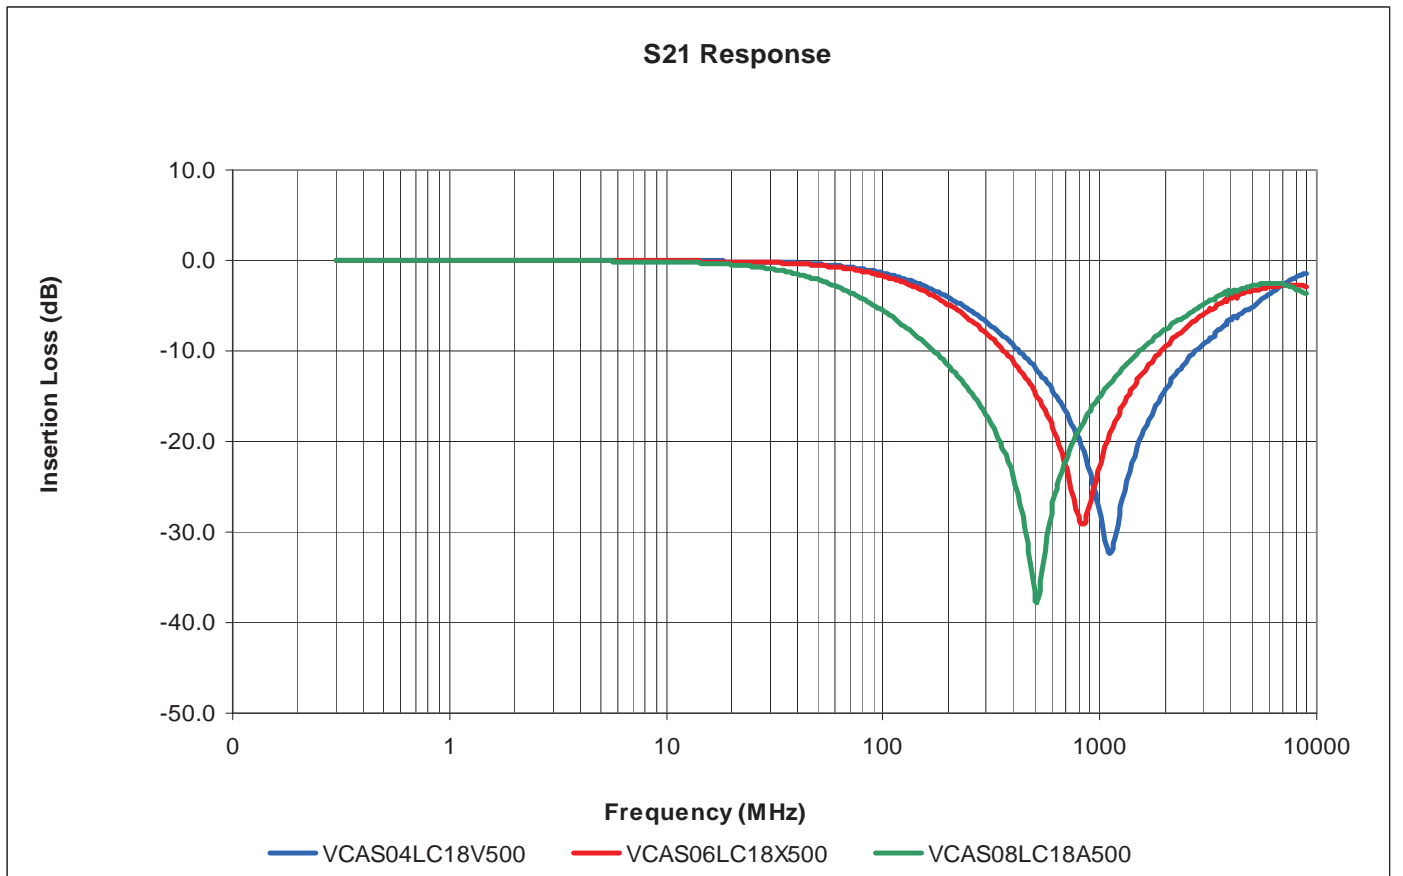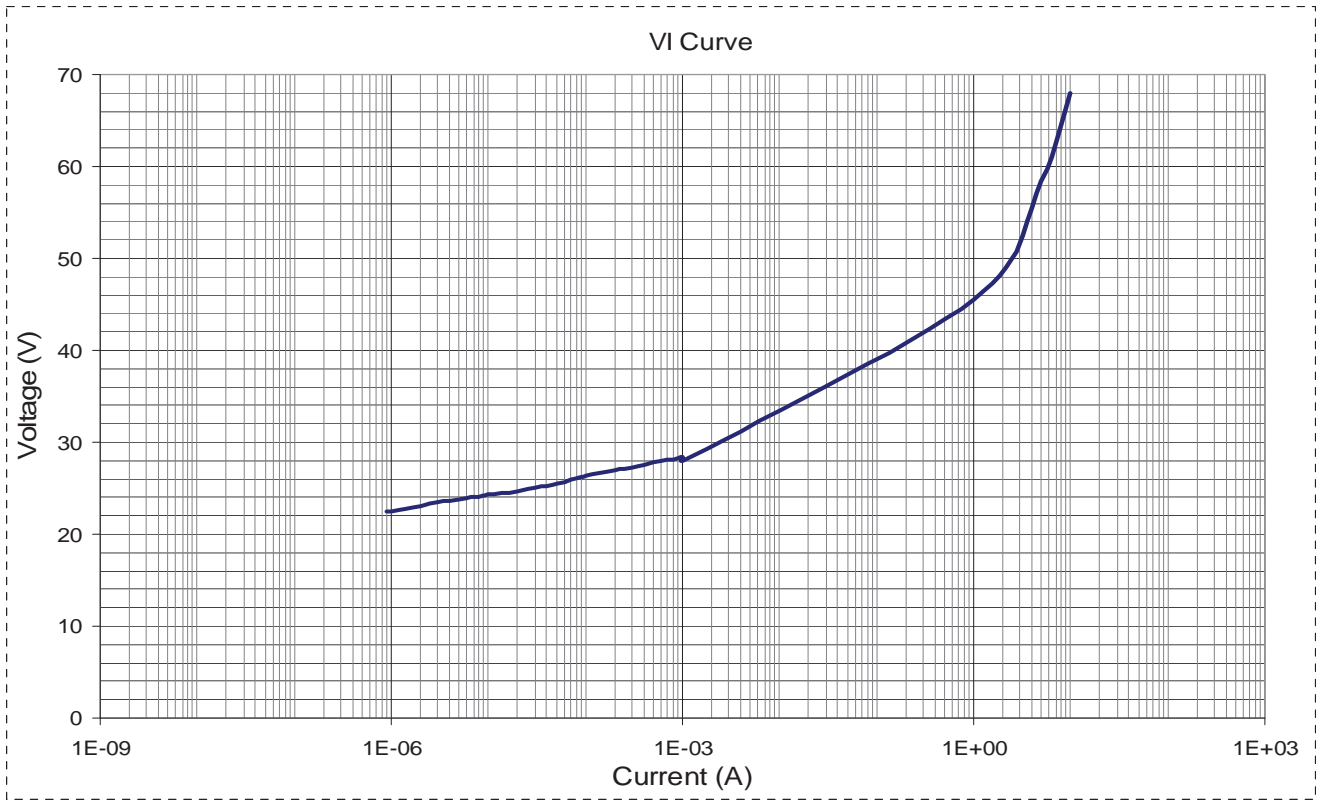

No.	Item	Requirement	Test Method
1	Operating Temp.	-55°C to +125° C	
2	Appearance/Dimensions	No visible damage Dimensions: see par 6	Visual examination at 10% magnification Dimensions verification by class2 caliper
3	Solderability	The dipped surface shall be at least 95% covered with a new smooth solder coating.	Soak in eutectic solder bath of temperature at 230+/-5°C for 5sec.
4	Solder heat resistance	No mechanical damage. Capacitance: 3 pF Leakage: <100nA	<ul style="list-style-type: none"> <li>a. Read capacitance and leakage.</li> <li>b. Soak in eutectic solder bath of temperature at 260+/-5°C. for 10+/-1sec.</li> <li>c. Natural cool down to +25°C</li> <li>d. Read capacitance and leakage after 24+/-2 hours.</li> </ul>

5	Humidity Life	Capacitance: 3 pF Leakage: <100nA	<ul style="list-style-type: none"> <li>a. Read capacitance and leakage.</li> <li>b. Leave device in chamber of +85+/-3°C, 85+/-5% relative humidity for 1,000± 5hours.</li> <li>c. Read capacitance and leakage after 3-4 hours conditioning at 25+/-5°C</li> </ul>
6	Life Test	Capacitance: 3 pF Leakage: <100nA	<ul style="list-style-type: none"> <li>a. Read capacitance and leakage.</li> <li>b. Apply 100% of working voltage at test temperature of 125+/-4°C for 1,000+48/-0hours.</li> <li>c. Read capacitance and leakage after 24+/-2 hours conditioning at 25+/- 5°C</li> </ul>