

1.本站收集的数据手册和产品资料都来自互联网,版权归原作者所有。如读者和版权方有任 何异议请及时告之,我们将妥善解决。

本站提供的中文数据手册是英文数据手册的中文翻译,其目的是协助用户阅读,该译文无法自动跟随原稿更新,同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。

3.本站提供的产品资料,来自厂商的技术支持或者使用者的心得体会等,其内容可能存在描 叙上的差异,建议读者做出适当判断。

4.如需与我们联系,请发邮件到marketing@iczoom.com,主题请标有"数据手册"字样。

# **Read Statement**

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.

2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.

3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.

4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".



#### A 1.55V to 5.25V, 1.9µA, 9kHz to 300kHz Silicon Timer

#### FEATURES

- ♦ Ultra Low Supply Current: 1.9µA at 25kHz
- Supply Voltage Operation: 1.55V to 5.25V
- Single Resistor Sets FOUT at 50% Duty Cycle
- Programmable FOUT Period:
  - 9kHz ≤ FOUT ≤ 300kHz
- FOUT Period Accuracy: 3%
- ♦ FOUT Period Drift: 0.02%/°C
- Single Resistor Sets Output Frequency
- Separate PWM Control and Buffered Output
- FOUT/PWMOUT Output Driver Resistance: 160Ω

#### **APPLICATIONS**

Portable and Battery-Powered Equipment Low-Parts-Count Nanopower Oscillator Compact Micropower Replacement for Crystal and Ceramic Oscillators

Micropower Pulse-width Modulation Control Micropower Pulse-position Modulation Control Micropower Clock Generation Micropower Sequential Timing


### DESCRIPTION

The TS3003 is a single-supply, second-generation oscillator/timer fully specified to operate at a supply voltage range of 1.55 V to 5.25 V while consuming less than 2.4 µA(max) supply current. Requiring only a resistor to set the base output frequency (or output period) at 25 kHz (or 40 µs) with a 50% duty cycle, the TS3003 timer/oscillator is compact, easy-to-use, and versatile. Optimized for ultra-long life, low frequency, battery-powered/portable applications, the TS3003 joins the TS3001, TS3002, TS3004, and TS3006 in the CMOS timer family of "NanoWatt Analog™" high-performance analog integrated circuits.

The TS3003 output frequency can be user-adjusted from 9 kHz to 300 kHz with a single resistor. In addition, the TS3003 represents a 25% reduction in pcb area and a factor-of-10 lower power consumption over other CMOS-based integrated circuit oscillators/timers. When compared against industrystandard 555-timer-based products, the TS3003 offers up to 84% reduction in pcb area and over three orders of magnitude lower power consumption.

The TS3003 is fully specified over the -40°C to +85°C temperature range and is available in a low-profile, 10-pin 3x3 mm TDFN package with an exposed back-side paddle.

## **TYPICAL APPLICATION CIRCUIT**

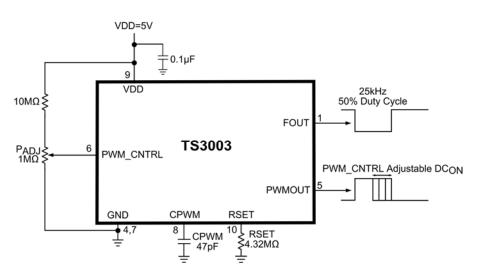




### **ABSOLUTE MAXIMUM RATINGS**

V <sub>DD</sub> to GND	
PWM_CNTRL to GND	
FOUT, PWMOUT to GND	
RSET to GND	
CPWM to GND	
FDIV to GND	0.3V to +5.5V

Continuous Power Dissipation ( $T_A = +70^{\circ}C$ )		
10-Pin TDFN (Derate at 13.48mW/°C above +70°C) 1078mW		
Operating Temperature Range40°C to +85°C		
Storage Temperature Range65°C to +150°C		
Lead Temperature (Soldering, 10s)+300°C		

Electrical and thermal stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to any absolute maximum rating conditions for extended periods may affect device reliability and lifetime.

#### **PACKAGE/ORDERING INFORMATION**

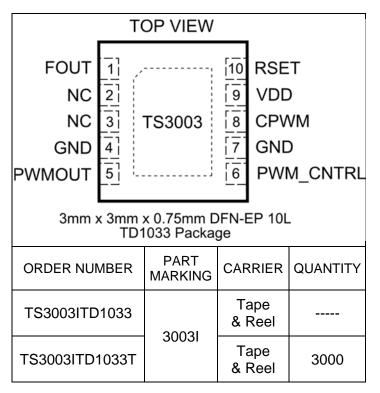

Lead-free Program: Silicon Labs supplies only lead-free packaging.

Consult Silicon Labs for products specified with wider operating temperature ranges.



### **ELECTRICAL CHARACTERISTICS**

 $V_{\text{DD}} = 3V, V_{\text{PWM}_{\text{CNTRL}}} = V_{\text{DD}}, R_{\text{SET}} = 4.32 M\Omega, R_{\text{LOAD}(\text{FOUT})} = \text{Open Circuit}, C_{\text{LOAD}(\text{FOUT})} = 0 \text{pF}, C_{\text{LOAD}(\text{PWM})} = 0 \text{pF}, C_{\text{PWM}} = 47 \text{pF}, \text{unless otherwise noted.}$  Values are at  $T_{\text{A}} = 25^{\circ}\text{C}$  unless otherwise noted. See Note 1.

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS	
Supply Voltage	V <sub>DD</sub>			1.55		5.25	V	
		$CPWM = V_{DD}$			1.9	2.4		
Supply Current	I <sub>DD</sub>	$CPVVIVI = V_{DD}$	$-40^{\circ}C \le T_A \le 85^{\circ}C$			2.7	μA	
Supply Cullent	DD				3.3	3.6	μΛ	
			$-40^{\circ}C \le T_A \le 85^{\circ}C$			4.5		
FOUT Period	t <sub>FOUT</sub>			39	40.1	41.2	μs	
	4FOUT		$-40^{\circ}C \le T_A \le 85^{\circ}C$	38		42	μο	
FOUT Period Line Regulation	$\Delta t_{FOUT}/V$	$1.55 \text{V} \leq \text{V}_{\text{DD}} \leq 5.25 \text{V}$			0.17		%/V	
FOUT Duty cycle				49		51	%	
FOUT Period Temperature Coefficient	$\Delta t_{FOUT} / \Delta T$				0.02		%/°C	
PWMOUT Duty Cycle	DC(PWMOUT)			37	41.6	48	%	
		V <sub>PWM_CNTRL</sub> = 0V		15		24	70	
PWMOUT Duty Cycle Line Regulation	∆DC(PWMOUT)/V	1.55V < V <sub>DD</sub> < 5.25V, FDIV2:0 = 000			-3		%	
C <sub>PWM</sub> Sourcing Current	I <sub>CPWM</sub>			930		1050	nA	
			$-40^{\circ}\text{C} \le \text{T}_{\text{A}} \le 85^{\circ}\text{C}$	810		1150	mV	
UVLO Hysteresis	V <sub>UVLO</sub>	$(V_{DD}=1.55V) - (V_{DD}_{SHUTDOWN VOLTAGE})$	Ε)	150		250	mv	
FOUT, PWMOUT Rise Time	t <sub>RISE</sub>	See Note 2, $C_L = 15pF$			10		ns	
FOUT, PWMOUT Fall Time	t <sub>FALL</sub>	See Note 2, C <sub>L</sub> = 15pF			10		ns	
FOUT Jitter		See Note 3			0.001		%	
RSET Pin Voltage	V(RSET)				0.3		V	
FDIV Input Current	I					10	nA	
	I <sub>FDIV</sub>		$-40^{\circ}C \le T_A \le 85^{\circ}C$			20		
Maximum Oscillator Frequency	Fosc	RSET= 360K				300	kHz	
High Level Output Voltage, FOUT and PWMOUT	V <sub>DD</sub> - V <sub>OH</sub>	I <sub>OH</sub> = 1mA			160		mV	
Low Level Output Voltage, FOUT and PWMOUT	V <sub>OL</sub>	I <sub>OL</sub> = 1mA			140		mV	
Dead Time	T <sub>DT</sub>	FOUT edge falling and PWMOUT edge rising			106		ns	

Note 1: All devices are 100% production tested at T<sub>A</sub> = +25°C and are guaranteed by characterization for T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, as specified.
Note 2: Output rise and fall times are measured between the 10% and 90% of the V<sub>DD</sub> power-supply voltage levels. The specification is based on lab bench characterization and is not tested in production.


Note 3: Timing jitter is the ratio of the peak-to-peak variation of the period to the mean of the period. The specification is based on lab bench characterization and is not tested in production.





#### **TYPICAL PERFORMANCE CHARACTERISTICS**

 $V_{\text{DD}} = 3V, V_{\text{PWM}_{\text{CNTRL}}} = V_{\text{DD}}, R_{\text{SET}} = 4.32M\Omega, R_{\text{LOAD}(\text{FOUT})} = \text{Open Circuit}, C_{\text{LOAD}(\text{FOUT})} = 0\text{pF}, C_{\text{LOAD}(\text{PWM})} = 0\text{pF}, C\text{PWM} = V_{\text{DD}}, \text{ unless otherwise noted.}$ 

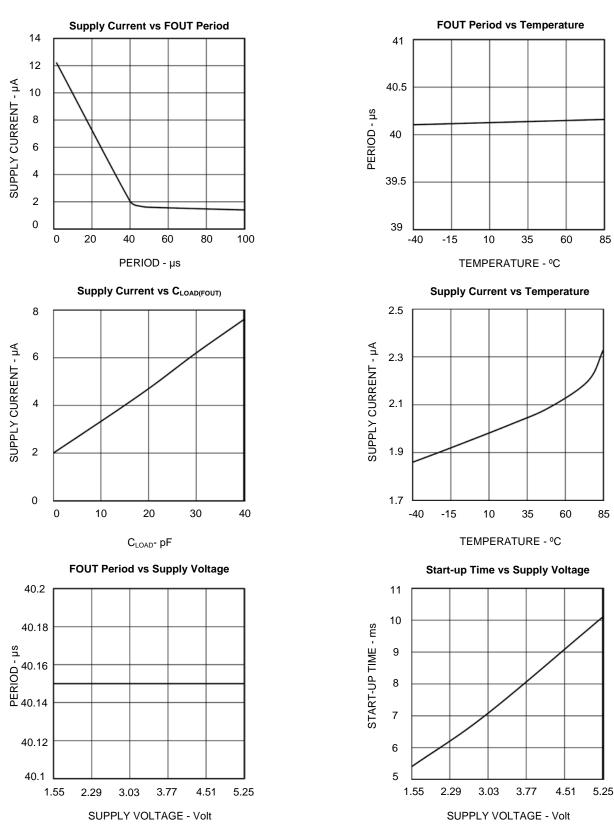





# TS3003

#### **TYPICAL PERFORMANCE CHARACTERISTICS**

 $V_{\text{DD}} = 3V, V_{\text{PWM\_CNTRL}} = V_{\text{DD}}, R_{\text{SET}} = 4.32M\Omega, R_{\text{LOAD}(\text{FOUT})} = \text{Open Circuit}, C_{\text{LOAD}(\text{FOUT})} = 0pF, C_{\text{LOAD}(\text{PWM})} = 0pF, CPWM = V_{\text{DD}}, \text{ unless otherwise noted.}$ 





FOUT  $V_{DD} = 3V, C_{LOAD} = 15pF$ 




5µs/DIV

FOUT and PWMOUT  $V_{DD} = 3V, C_{LOAD} = 15pF, V_{PWM CNTRL} = V_{DD}, C_{PWM} = 47pF$ 






FOUT  $V_{DD} = 5V, C_{LOAD} = 15pF$ 



5µs/DIV






## **PIN FUNCTIONS**

PIN	NAME	FUNCTION	
1	FOUT	Fixed Frequency Output. A push-pull output stage with an output resistance of $160\Omega$ . FOUT pin swings from GND to VDD. For lowest power operation, capacitance loads should be minimized and resistive loads should be maximized.	
2,3,	NC	Non-Connect.	
5	PWMOUT	Pulse-width Modulated Output. A push-pull output stage with an output resistance of $160\Omega$ , the PWMOUT pin is wired anti- phase with respect to FOUT and swings from GND to VDD. For lowest power operation, capacitance loads should be minimized and resistive loads should be maximized.	
6	PWM_CNTRL	PWM Output Pulse Control Pin. Applying a voltage between GND and $V_{RSET}$ will reduce the duty cycle of the PWMOUT output that is set by the capacitor connected to the CPWM pin. Connect PWM_CNTRL to VDD for fixed PWMOUT output pulse time (determined only by capacitor at CPWM).	
4,7	GND	Ground. Connect this pin to the system's analog ground plane.	
8	CPWM	PWMOUT Pulse Width Programming Capacitance Input. target capacitance connected from this pin to GND sets t duty cycle of the PMW output. Minimize any stray capacitan on this pin. The voltage on this pin will swing from GND V <sub>RSET</sub> . Connect CPWM to VDD to disable PWM functi (saves PWM current).	
9	VDD	Power Supply Voltage Input. The supply voltage range is $1.55V \le V_{DD} \le 5.25V$ . Bypass this pin with a 0.1uF ceramic coupling capacitor in close proximity to the TS3003.	
10	RSET	FOUT Programming Resistor Input. A 4.32MOhm resistor connected from this pin to ground sets the T3003's internal oscillator's output period to 40µs (25KHz). For optimal performance, the composition of the RSET resistor shall be consistent with a tolerance of 1% or lower. The RSET pin voltage is approximately 0.3V.	



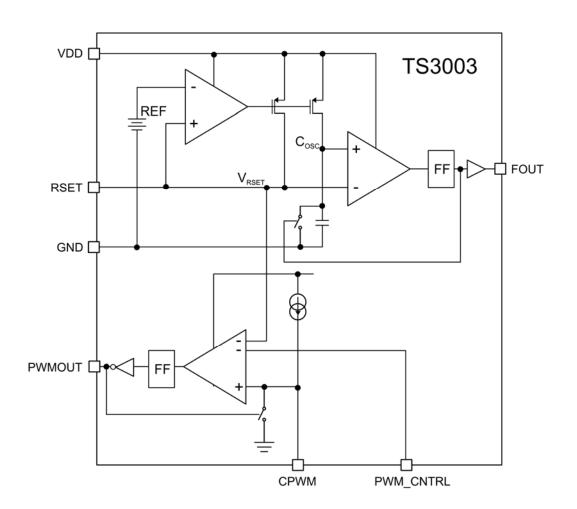

#### THEORY OF OPERATION

The TS3003 is a user-programmable oscillator where the period of the square wave at its FOUT terminal is generated by an external resistor connected to the RSET pin. The output frequency is given by:

FOUT (kHz) =  $\frac{1.08E11}{RSET}$ 

Equation 1. FOUT Frequency Calculation

Rset (MΩ)	FOUT (kHz)	
0.360	300	
1	108	
2.49	43.37	
4.32	25	
6.81	15.86	
9.76	11.07	
12	9	
Table 1: FOUT vs RSET		



With an  $R_{\text{SET}} = 4.32M\Omega$ , the output frequency is approximately 25kHz with a 50% duty cycle. As design aids, Tables 1 lists TS3003's typical FOUT for various standard values for  $R_{\text{SET}}$ .

The output frequency can be user-adjusted from 9kHz to 300kHz with a single resistor. The TS3003 also provides a separate PWM output signal at its PWMOUT terminal that is anti-phase with respect to FOUT. A dead time of approximately 106ns exists between FOUT and PWMOUT. To adjust the pulse width of the PWMOUT output, a single capacitor can be placed at the CPWM pin. To determine the capacitance needed for a desired pulse width, the following equation is to be used:

 $CPWM(F) = \frac{Pulse Width(s) \times I_{CPWM}}{V_{CPWM} \cong 300mV}$ 

#### Equation 2. CPWM Capacitor Calculation

where I<sub>CPWM</sub> and V<sub>CPWM</sub> is the current supplied and voltage applied to the CPWM capacitor, respectively. The pulse width is determined based on the period of FOUT and should never be greater than the period at FOUT. Make sure the PWM\_CNTRL pin is set to at least 400mV when calculating the pulse width of PWMOUT. Note V<sub>CPWM</sub> is approximately 300mV, which is the RSET voltage. Also note that I<sub>CPWM</sub> is approximately 1 $\mu$ A.

The PWMOUT output pulse width can be adjusted further after selecting a CPWM capacitor. This can be achieved by applying a voltage to the PWM\_CNTRL pin between V<sub>RSET</sub> and GND. With a voltage of at least VRSET, the pulse width is set based on Equation 2. For example, with a period of 40µs( 25kHz) a 47pF capacitor at the CPWM pin generates a pulse width of approximately 16us. This can be calculated using equation 2. By reducing the PWM CNTRL voltage from  $V_{RSET} \cong 300 \text{mV}$  to GND, the pulse width is reduced from 16µs to approximately 8µs. This is a pulse width reduction of 50%. Note that as the FOUT frequency increases, the amount of pulse width reduction reduces and vice versa. Furthermore, if the PWMOUT output is half the frequency of the FOUT output, this means your CPWM capacitor is too large and as a result, the pulse width is greater than the FOUT period. In this case, use Equation 2 and reduce the capacitor value to less than the period. Connect CPWM to VDD to disable the PWM function and in turn, save power. Connect PWM CNTRL to VDD for a fixed PWMOUT output pulse width, which is determined by the CPWM pin capacitor only.

### **APPLICATIONS INFORMATION**

#### **Minimizing Power Consumption**

To keep the TS3003's power consumption low, resistive loads at the FOUT and PWMOUT terminals increase dc power consumption and therefore should be as large as possible. Capacitive loads at the FOUT and PWMOUT terminals increase the TS3003's transient power consumption and, as well, should be as small as possible.

One challenge to minimizing the TS3003's transient power consumption is the probe capacitance of oscilloscopes and frequency counter instruments. Most instruments exhibit an input capacitance of 15pF or more. Unless buffered, the increase in transient load current can be as much as 400nA.

To minimize capacitive loading, the technique shown in Figure 1 can be used. In this circuit, the principle of




Figure 1: Using an External Capacitor in Series with Probes Reduces Effective Capacitive Load.

series-connected capacitors can be used to reduce the effective capacitive load at the TS3003's FOUT and PWMOUT terminals.

To determine the optimal value for  $C_{EXT}$  once the probe capacitance is known by simply solving for  $C_{EXT}$  using the following expression:

$$C_{EXT} = \frac{1}{\frac{1}{C_{LOAD(EFF)}} - \frac{1}{C_{PROBE}}}$$

Equation 3: External Capacitor Calculation

For example, if the instrument's input probe capacitance is 15pF and the desired effective load capacitance at either or both FOUT and PWMOUT terminals is to be  $\leq$ 5pF, then the value of C<sub>EXT</sub> should be  $\leq$ 7.5pF.



#### TS3003 Start-up Time

As the TS3003 is powered up, its FOUT terminal (and PWMOUT terminal, if enabled) is active once the applied VDD is higher than 1.55V. Once the applied VDD is higher than 1.55V, the master oscillator achieves steady-state operation within 8ms.

# Divide the PWMOUT Output Frequency by Two with the TS3003

Using a single resistor and capacitor, the TS3003 can be configured to a divide by two circuit as shown in Figure 2. To achieve a divide by two function with the TS3003, the pulse width of the PWMOUT output must be at least a factor of 2 greater than the period set at FOUT by resistor RSET. The CPWM capacitor selected must meet this pulse width requirement and can be calculated using Equation 2. In Figure 3, a value of 4.32M $\Omega$  for RSET sets the FOUT output period to 40µs. A CPWM capacitor of 265pF was chosen, which sets the pulse width of PWMOUT to approximately 80µs. This is well above the required minimum pulse width of 40µs.




Figure 2: Configuring the TS3003 into a Divide by Two Frequency Divider

# Using the TS3003 and a Potentiometer to Dim an LED

The TS3003 can be configured to dim an LED by modulating the pulse width of the PWMOUT output. With an RSET=  $2M\Omega$ , the FOUT output frequency is approximately 51kHz (or 19.5µs period). Refer to Figure 3. The CPWM capacitor was calculated using Equation 2 with a pulse width of 15µs. To reduce the pulse width from 15µs and in turn, dim the LED, a  $1M\Omega$  potentiometer is used. The potentiometer is connected to the PWM\_CNTRL pin in a voltage divider configuration. The supply voltage of the circuit is 5V.





Figure 3: TS3003 Configured to Dim an LED with a Potentiometer



#### PACKAGE OUTLINE DRAWING

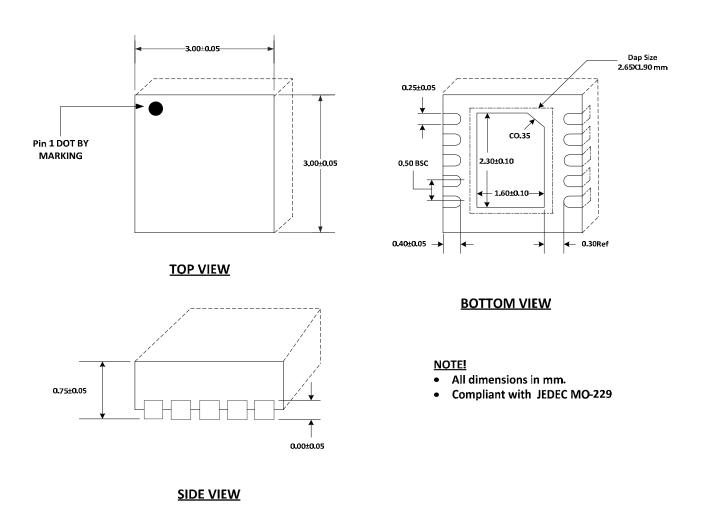


10-Pin TDFN33 Package Outline Drawing (N.B., Drawings are not to scale)

#### **Patent Notice**

Silicon Labs invests in research and development to help our customers differentiate in the market with innovative low-power, small size, analog-intensive mixed-signal solutions. Silicon Labs' extensive patent portfolio is a testament to our unique approach and world-class engineering team.

The information in this document is believed to be accurate in all respects at the time of publication but is subject to change without notice. Silicon Laboratories assumes no responsibility for errors and omissions, and disclaims responsibility for any consequences resulting from the use of information included herein. Additionally, Silicon Laboratories assumes no responsibility for the functioning of undescribed features or parameters. Silicon Laboratories reserves the right to make changes without further notice. Silicon Laboratories makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Silicon Laboratories assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Silicon Laboratories products are not designed, intended, or authorized for use in applications intended to support or sustain life, or for any other application in which the failure of the Silicon Laboratories product could create a situation where personal injury or death may occur. Should Buyer purchase or use Silicon Laboratories products for any such unintended or unauthorized application, Buyer shall indemnify and hold Silicon Laboratories harmless against all claims and damages.

Silicon Laboratories and Silicon Labs are trademarks of Silicon Laboratories Inc. Other products or brandnames mentioned herein are trademarks or registered trademarks of their respective holders.

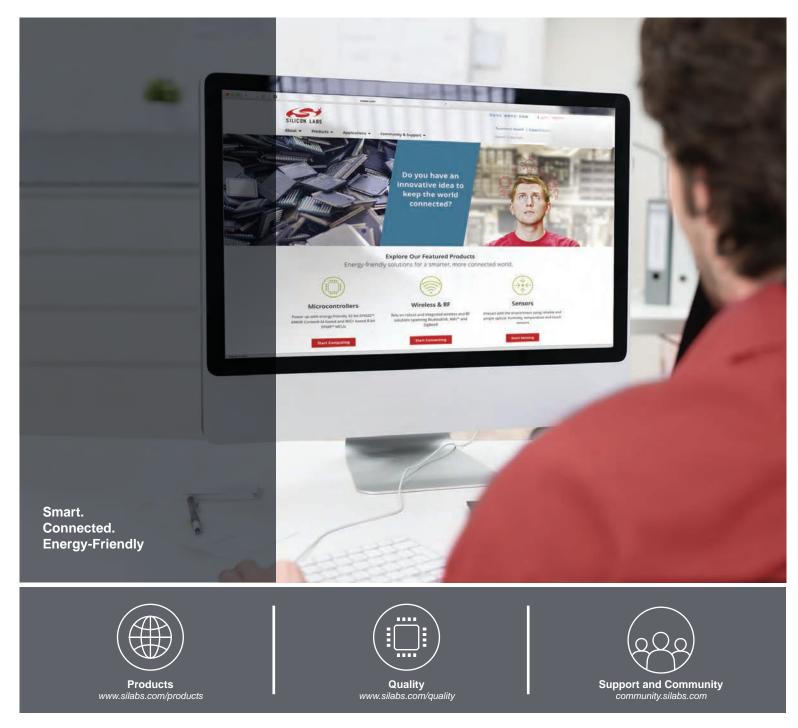

#### Disclaimer

Silicon Laboratories intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Laboratories products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Laboratories reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Silicon Laboratories shall have no liability for the consequences of use of the information supplied herein. This document does not imply or express copyright licenses granted hereunder to design or fabricate any integrated circuits. The products must not be used within any Life Support System without the specific to result in significant personal injury or death. Silicon Laboratories products are generally not intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Laboratories products are generally not intended for military applications. Silicon Laboratories under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons.

#### **Trademark Information**

Silicon Laboratories Inc., Silicon Laboratories, Silicon Labs, SiLabs and the Silicon Labs logo, CMEMS®, EFM, EFM32, EFR, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZMac®, EZRadio®, EZRadioPRO®, DSPLL®, ISOmodem ®, Precision32®, ProSLIC®, SiPHY®, USBXpress® and others are trademarks or registered trademarks of Silicon Laboratories Inc. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc. 400 West Cesar Chavez Austin, TX 78701 USA

#### http://www.silabs.com