

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

DATA SHEET

PCK111

Low voltage 1:10 differential
ECL/PECL/HSTL clock driver

Product data
Supersedes data of 2003 Dec 03

2004 Apr 23

Low voltage 1:10 differential ECL/PECL/HSTL clock driver

PCK111

FEATURES

- 85 ps part-to-part skew typical
- 20 ps output-to-output skew typical
- Differential design
- V_{BB} output
- Low voltage V_{EE} range of -2.25 V to -3.8 V for ECL
- Low voltage V_{CC} range of $+2.375\text{ V}$ to $+3.8\text{ V}$ for PECL
- $75\text{ k}\Omega$ input pull-down resistors
- ECL/PECL outputs
- Form, fit, and function compatible with MC100EP111

DESCRIPTION

The PCK111 is a low skew 1-to-10 differential driver, designed with clock distribution in mind. It accepts two clock sources into an input multiplexer. The PECL input signals can be either differential or single-ended if the V_{BB} output is used. The selected signal is fanned out to 10 identical differential outputs.

The PCK111 is specifically designed, modeled and produced with low skew as the key goal. Optimal design and layout serve to minimize gate-to-gate skew within a device, and empirical modeling is used to determine process control limits that ensure consistent t_{PD} distributions from lot to lot. The net result is a dependable, guaranteed low skew device.

To ensure that the tight skew specification is met, it is necessary that both sides of the differential output are terminated into $50\ \Omega$, even if only one side is being used. In most applications, all ten differential pairs will be used, and therefore terminated. In the case where fewer than ten pairs are used, it is necessary to terminate at least the output pairs on the same package side as the pair(s) being used on that side, in order to maintain minimum skew. Failure to do this will result in small degradations of propagation delay (on the order of 10–20 ps) of the output(s) being used, which, while not being catastrophic to most designs, will mean a loss of skew margin.

The PCK111 can be used for high performance clock distribution in $+3.3\text{ V}$ or $+2.5\text{ V}$ systems. Designers can take advantage of the PCK111's performance to distribute low skew clocks across the backplane or the board. In a PECL environment, series or Thevenin line terminations are typically used as they require no additional power supplies.

The PCK111 may be driven single-endedly utilizing the V_{BB} bias output with the $\overline{CLK0}$ input. If a single-ended signal is to be used, the V_{BB} pin should be connected to the $\overline{CLK0}$ input and bypassed to ground via a $0.01\ \mu\text{F}$ capacitor. The V_{BB} output can only source/sink 0.2 mA , therefore, it should be used as a switching reference for the PCK111 only. Part-to-part skew specifications are not guaranteed when driving the PCK111 single-endedly.

PINNING

Pin configurations

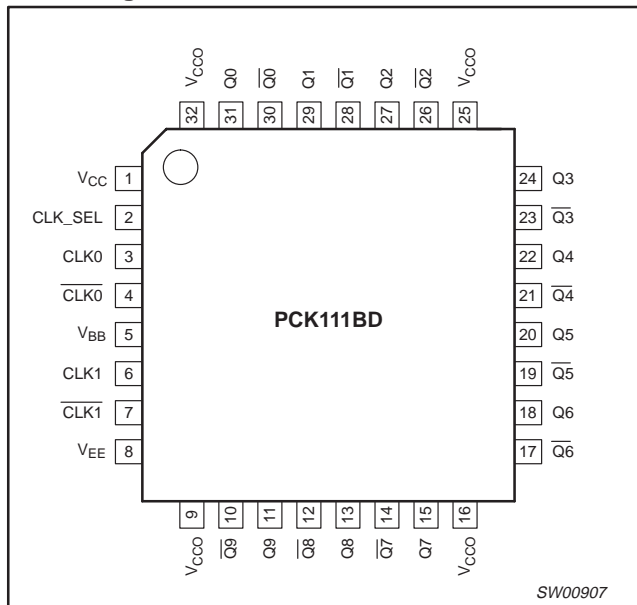


Figure 1. LQFP32 pin configuration

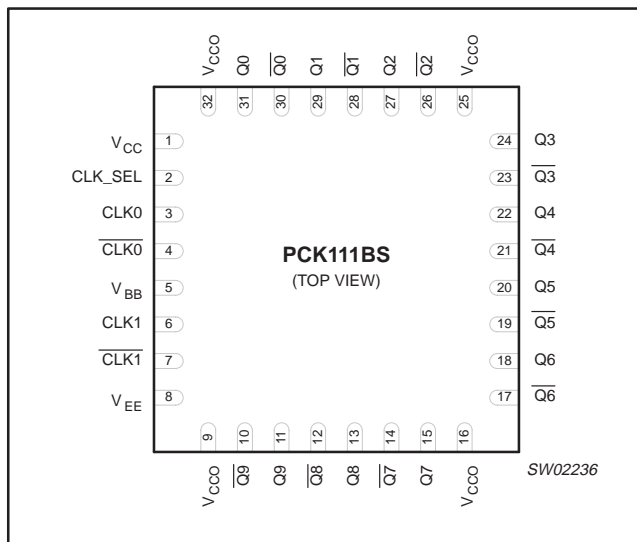


Figure 2. HVQFN32 pin configuration

ORDERING INFORMATION

Type number	Package		Version	Temperature range
	Name	Description		
PCK111BD	LQFP32	plastic low profile quad flat package; 32 leads; body $7 \times 7 \times 1.4\text{ mm}$	SOT358-1	$-40\text{ }^\circ\text{C}$ to $+85\text{ }^\circ\text{C}$
PCK111BS	HVQFN32	plastic thermal enhanced very thin quad flat package; no leads; 32 terminals; body $5 \times 5 \times 0.85\text{ mm}$	SOT617-1	$-40\text{ }^\circ\text{C}$ to $+85\text{ }^\circ\text{C}$

Low voltage 1:10 differential ECL/PECL/HSTL clock driver

PCK111

Pin description

SYMBOL	PIN	DESCRIPTION
V _{CC}	1	Supply voltage
CLK_SEL	2	Active CMOS clock select input
CLK0, $\overline{\text{CLK0}}$	3, 4	Differential ECL/PECL/HSTL input pair
V _{BB}	5	Reference voltage output
CLK1, $\overline{\text{CLK1}}$	6, 7	Differential ECL/PECL/HSTL input pair
V _{EE}	8	Ground
V _{CCO}	9, 16, 25, 32	Output drive power supply voltage
Q0-Q9	31, 29, 27, 24, 22, 20, 18, 15, 13, 11	Differential PECL outputs
$\overline{\text{Q0}}-\overline{\text{Q9}}$	30, 28, 26, 23, 21, 19, 17, 14, 12, 10	Differential PECL outputs

LOGIC SYMBOL

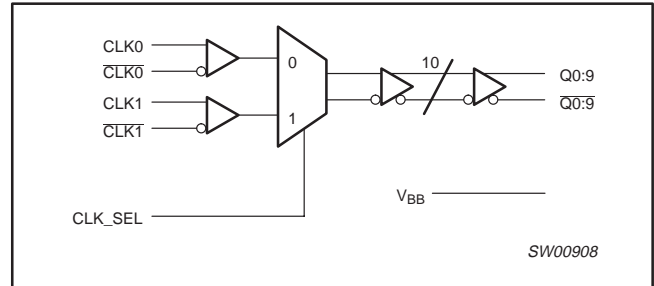


Figure 3. Logic symbol

FUNCTION TABLE

CLK_SEL	Active input
0	CLK0, $\overline{\text{CLK0}}$
1	CLK1, $\overline{\text{CLK1}}$

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

SYMBOL	PARAMETER	LIMITS	UNIT
V _{CC}	Supply voltage	-0.5 to +4.6	V
ESDHBM	Electrostatic discharge (Human Body Model; 1.5 kΩ, 100 pF)	>1.75	kV
ESDMM	Electrostatic discharge (Machine Model; 0 kΩ, 200 pF)	>200	V
ESDCDM	Electrostatic discharge (Charge Device Model)	>1000	V

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
V _{CC}	Supply voltage		2.25	3.8	V
V _{IR}	Receiver input voltage		V _{EE}	V _{CC}	V
V _{DIFF}	Input differential voltage ¹	V _(CLKinN) -V _(CLKin)	—	1.00	V
T _{amb}	Operating ambient temperature range in free air		-40	+85	°C

NOTE:

- To idle an unused differential clock input, connect one input terminal (e.g. CLK1) to V_{BB} and leave its complimentary input terminal (e.g. $\overline{\text{CLK1}}$) open-circuit, in which case $\overline{\text{CLK1}}$ will default LOW by its internal pull-down resistor. Inputs should not be shorted to ground or V_{CC}.

Low voltage 1:10 differential ECL/PECL/HSTL clock driver

PCK111

DC ELECTRICAL CHARACTERISTICS

 $V_{CC} = 0\text{ V}$, $V_{EE} = -2.25\text{ to }-3.80\text{ V}$

SYMBOL	PARAMETER	CONDITION	-40 °C MIN	-40 °C MAX	25 °C MIN	25 °C MAX	85 °C MIN	85 °C MAX	UNIT
I_{EE}	Internal supply current	Absolute value of current	45	85	60	95	65	105	mA
I_{CC}	Output and internal supply current	All outputs terminated 50 Ω to $V_{CC} = -2.0\text{ V}$	270	360	290	380	300	380	mA
I_{IN}	Input current	Includes pullup/pulldown resistors	—	150	—	150	—	150	μA
V_{BB}	Internal bias voltage		-1.38	-1.23	-1.38	-1.23	-1.38	-1.23	V
V_{IH}	Input HIGH voltage	Single ended	-1.165	-0.880	-1.165	-0.880	-1.165	-0.880	V
		CLK_SEL	$0.2V_{EE}$	V_{CC}	$0.2V_{EE}$	V_{CC}	$0.2V_{EE}$	V_{CC}	V
V_{IL}	Input LOW voltage	Single ended	-1.810	-1.475	-1.810	-1.475	-1.810	-1.475	V
		CLK_SEL	V_{EE}	$0.8V_{EE}$	V_{EE}	$0.8V_{EE}$	V_{EE}	$0.8V_{EE}$	V
V_{PP}	Input amplitude	Difference of input = $V_{IH} - V_{IL}$ (Note 1)	0.5	1.3	0.5	1.3	0.5	1.3	V
V_{CMR}	Common mode voltage	Cross point of input = average (V_{IH} , V_{IL})	$V_{EE} + 1.0$	-0.3	$V_{EE} + 1.0$	-0.3	$V_{EE} + 1.0$	-0.3	V
V_{OH}	Output HIGH voltage	$I_{OH} = -30\text{ mA}$	-1.3	-0.95	—	—	-1.2	0.90	V
V_{OL}	Output LOW voltage	$I_{OL} = -5\text{ mA}$	-1.85	-1.4	—	—	-1.90	-1.5	V
V_{OUTpp}	Differential output swing		350	—	—	—	500	—	MV

NOTE:

- V_{PP} minimum and maximum required to maintain AC specifications. Actual device function will tolerate minimum V_{PP} of 100 mV.

DC ELECTRICAL CHARACTERISTICS

 $V_{CC} = V_{CC0} = 2.25\text{ to }3.80\text{ V}$, $V_{EE} = 0\text{ V}$

SYMBOL	PARAMETER	CONDITION	-40 °C MIN	-40 °C MAX	25 °C MIN	25 °C MAX	85 °C MIN	85 °C MAX	UNIT
I_{EE}	Internal supply current	Absolute value of current	45	85	60	95	65	105	mA
I_{CC}	Output and internal supply current	All outputs terminated 50 Ω to $V_{CC} = -2.0\text{ V}$	270	360	290	380	300	380	mA
I_{IN}	Input current	Includes pullup/pulldown resistors	—	150	—	150	—	150	μA
V_{BB}	Internal bias voltage		V_{CC} -1.38	V_{CC} -1.23	V_{CC} -1.38	V_{CC} -1.23	V_{CC} -1.38	V_{CC} -1.23	V
V_{IH}	Input HIGH voltage	Single ended	V_{CC} -1.165	V_{CC} -0.880	V_{CC} -1.165	V_{CC} -0.880	V_{CC} -1.165	V_{CC} -0.880	V
		CLK_SEL	$0.8V_{CC}$	V_{CC}	$0.8V_{CC}$	V_{CC}	$0.8V_{CC}$	V_{CC}	V
V_{IL}	Input LOW voltage	Single ended	V_{CC} -1.810	V_{CC} -1.475	V_{CC} -1.810	V_{CC} -1.475	V_{CC} -1.810	V_{CC} -1.475	V
		CLK_SEL	V_{EE}	$0.2V_{CC}$	V_{EE}	$0.2V_{CC}$	V_{EE}	$0.2V_{CC}$	V
V_{PP}	Input amplitude	Difference of input = $V_{IH} - V_{IL}$ (Note 1)	0.5	1.3	0.5	1.3	0.5	1.3	V
V_{CMR}	Common mode voltage	Cross point of input = average (V_{IH} , V_{IL})	1.0	$V_{CC}-0.3$	1.0	$V_{CC}-0.3$	1.0	$V_{CC}-0.3$	V
V_{IHCMR}	Input HIGH voltage (HSTL)		1.2	V_{CC}	1.2	V_{CC}	1.2	V_{CC}	V
V_x	Input crossover voltage (HSTL)	Cross point of input = average (V_{IH} , V_{IL})	0.68	0.9	0.68	0.9	0.68	0.9	V
V_{OH}	Output HIGH voltage	$I_{OH} = -30\text{ mA}$	V_{CC} -1.30	V_{CC} -0.95	—	—	V_{CC} -1.20	V_{CC} -0.90	V
V_{OL}	Output LOW voltage	$I_{OL} = -5\text{ mA}$	V_{CC} -1.85	V_{CC} -1.40	—	—	V_{CC} -1.90	V_{CC} -1.50	V
V_{OUTpp}	Differential output swing		350	—	—	—	500	—	MV

NOTE:

- V_{PP} minimum and maximum required to maintain AC specifications. Actual device function will tolerate minimum V_{PP} of 100 mV.

Low voltage 1:10 differential ECL/PECL/HSTL clock driver

PCK111

AC ELECTRICAL CHARACTERISTICS

 $V_{CC} = 2.25\text{ V to }3.80\text{ V}$, $V_{EE} = 0\text{ V}$, or $V_{CC} = 0\text{ V}$, $V_{EE} = -2.25\text{ V to }-3.80\text{ V}$

SYMBOL	PARAMETER	CONDITION	-40 °C MIN	-40 °C MAX	25 °C MIN	25 °C MAX	85 °C MIN	85 °C MAX	UNIT
t_{PD}	Differential propagation delay	Nominal (single input condition) $V_{PP} = 0.650\text{ V}$, $V_{CMR} = V_{CC} - 0.800\text{ V}$ (Note 1)	350	500	380	530	450	590	ps
t_{skew}	Part-to-part skew	Note 1	—	110	—	110	—	110	ps
t_{skew}	Output-to-output same part skew	Note 1	—	50	—	50	—	50	ps
t_{jitter}	Cycle-to-cycle jitter		—	1	—	1	—	1	ps
f_{MAX}	Maximum output frequency	Functional to 1.5 GHz; Timing specifications apply to 1.0 GHz	—	1500	—	1500	—	1500	MHz
t_r/t_f	Output rise/fall time at 20% to 80%	All outputs terminated 50 Ω to $V_{CC} - 2.0\text{ V}$	100	300	100	300	100	300	ps

NOTE:


- For operation with 2.5 V supply, the output termination is 50 Ω to V_{EE} .
For operation with 3.3 V supply, the output termination is 50 Ω to $V_{CC} - 2\text{ V}$.

Low voltage 1:10 differential
ECL/PECL/HSTL clock driver

PCK111

LQFP32: plastic low profile quad flat package; 32 leads; body 7 x 7 x 1.4 mm

SOT358-1

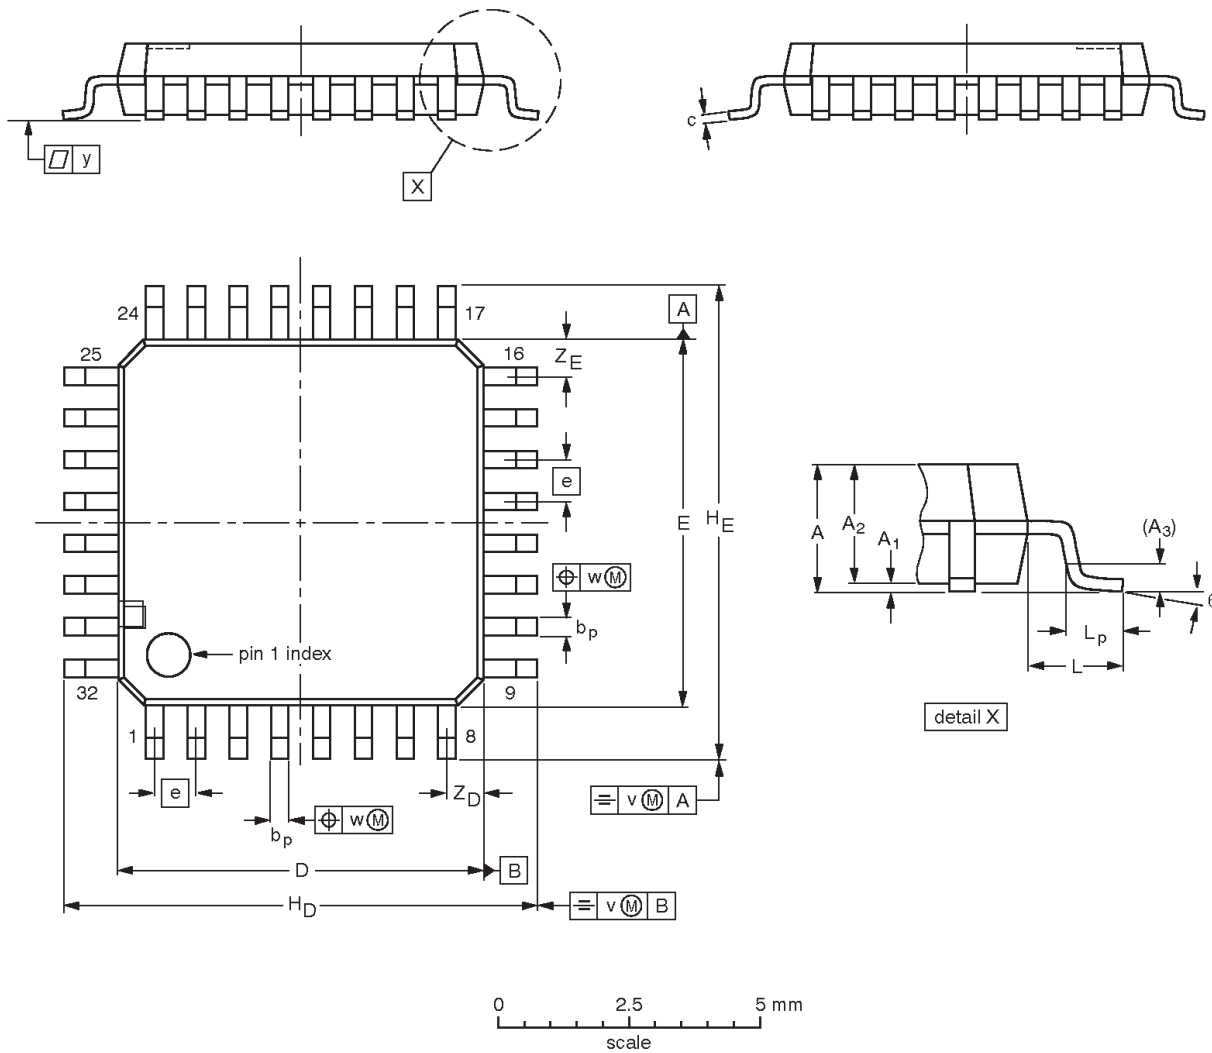

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _D	H _E	L	L _p	v	w	y	Z _D ⁽¹⁾	Z _E ⁽¹⁾	θ
mm	1.6	0.20 0.05	1.45 1.35	0.25	0.4 0.3	0.18 0.12	7.1 6.9	7.1 6.9	0.8	9.15 8.85	9.15 8.85	1	0.75 0.45	0.2	0.25	0.1	0.9 0.5	0.9 0.5	7° 0°

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.



OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT358 -1	136E03	MS-026				00-01-19 03-02-25

Low voltage 1:10 differential
ECL/PECL/HSTL clock driver

PCK111

HVQFN32: plastic thermal enhanced very thin quad flat package; no leads; 32 terminals;
body 5 x 5 x 0.85 mm

SOT617-1

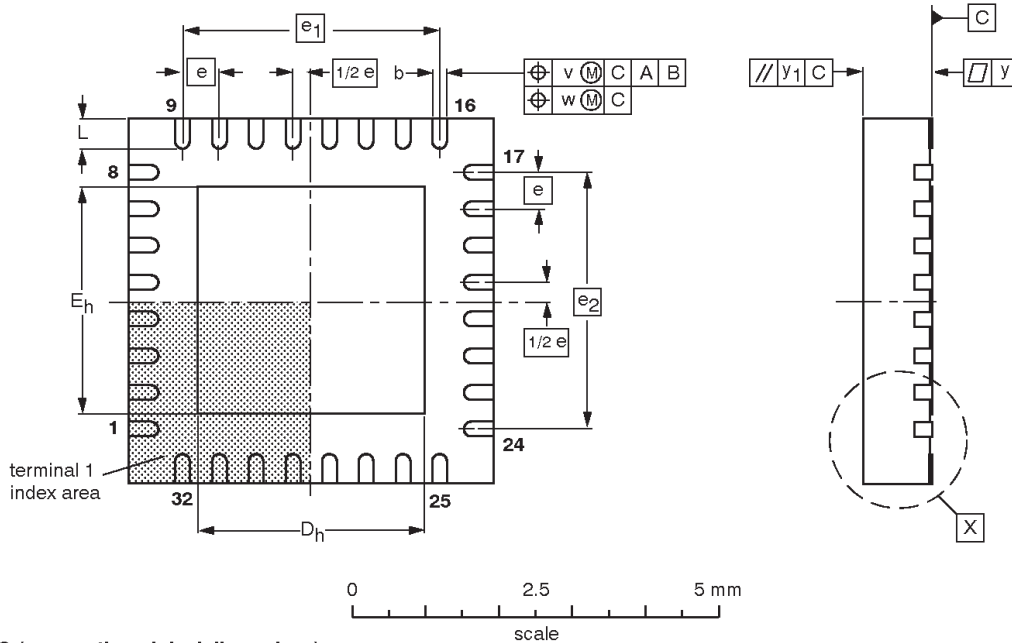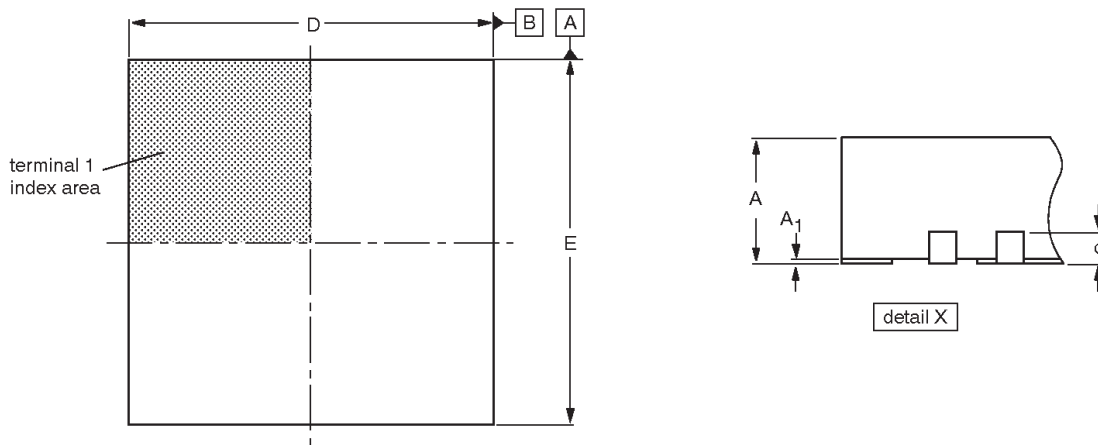

DIMENSIONS (mm are the original dimensions)

UNIT	A ⁽¹⁾ max.	A ₁	b	c	D ⁽¹⁾	D _h	E ⁽¹⁾	E _h	e	e ₁	e ₂	L	v	w	y	y ₁
mm	1	0.05 0.00	0.30 0.18	0.2	5.1 4.9	3.25 2.95	5.1 4.9	3.25 2.95	0.5	3.5	3.5	0.5 0.3	0.1	0.05	0.05	0.1

Note

1. Plastic or metal protrusions of 0.075 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT617-1	---	MO-220	---			01-08-08 02-10-18

**Low voltage 1:10 differential
ECL/PECL/HSTL clock driver**

PCK111**REVISION HISTORY**

Rev	Date	Description
_5	20040423	Product data (9397 750 13082). Supersedes data of 2003 Dec 03 (9397 750 12451). Modifications: <ul style="list-style-type: none">• Add Part type PCK111BS, HVQFN32 package option (SOT617-1).
_4	20031203	Product data (9397 750 12451); ECN 853-2281 01-A14515 dated 14 November 2003. Supersedes data of 13 December 2002 (9397 750 10865).
_3	20021213	Product data (9397 750 10865); ECN 853-2281 29225 of 22 November 2002.
_2	20020215	Product data (9397 750 09465); ECN 853-2281 27735 of 15 February 2002.

Low voltage 1:10 differential ECL/PECL/HSTL clock driver

PCK111

Data sheet status

Level	Data sheet status ^[1]	Product status ^{[2] [3]}	Definitions
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
II	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
III	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

Definitions

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Disclaimers

Life support — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes in the products—including circuits, standard cells, and/or software—described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Contact information

For additional information please visit
<http://www.semiconductors.philips.com>. Fax: +31 40 27 24825

© Koninklijke Philips Electronics N.V. 2004
All rights reserved. Printed in U.S.A.

Date of release: 04-04

For sales offices addresses send e-mail to:
sales.addresses@www.semiconductors.philips.com

Document order number:

9397 750 13082

Let's make things better.