

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

PRODUCT BRIEF:

Logic :: Marvell


PXA270 CARD ENGINE System on Module

The PXA270 Card Engine is a compact, product-ready hardware and software solution that fast forwards your embedded product design.

The PXA270 Card Engine is a complete System on Module (SOM) that offers essential features for handheld and embedded networking applications. Use of custom baseboards makes the Card Engine the ideal foundation for OEMs developing handheld and compact products. The Card Engine provides a common reference pin-out on its expansion connectors, which enables easy scalability to next generation microprocessor Card Engines when new functionality or performance is required.

Application development is performed right on the product-ready PXA270 Card Engine and software Board Support Packages (BSPs), which enables you to seamlessly transfer your application code and hardware into production.

The PXA270 Card Engine is ideal for applications in the medical, point-of-sale, industrial, and security markets. From patient

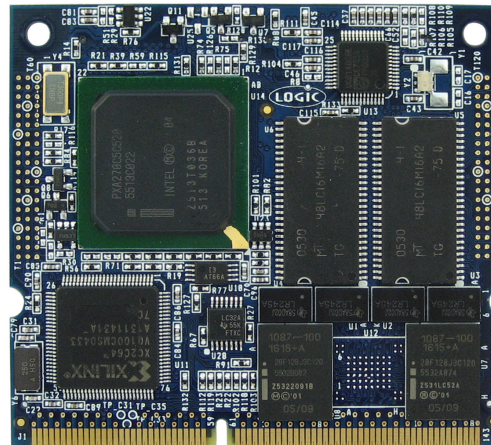

PXA270 CARD ENGINE

monitoring and medical imaging, to card payment terminals and bar code readers, to CCTV cameras and intruder alarms, the PXA270 Card Engine allows for powerful versatility and long-life products.

PXA270 CARD ENGINE :: HIGHLIGHTS:


- + Product-ready System on Module with the Marvell PXA270 Applications Processor running at 312, 416, or 520 MHz
- + Compact form factor 60.2 mm x 67.8 mm x 4.4 mm
- + Long product lifecycle
- + 0 °C to 70 °C (commercial temp) or -40 °C to 85 °C (industrial temp)
- + RoHS compliant

PXA270 ZOOM™ SDK :: FEATURES:

- + Application baseboard
- + PXA270 Card Engine (CENGPXA270-520-10-504HCR)
- + Necessary accessories to immediately get up and running
- + Kit available from Logic (SDK-PXA270-520-10-6432R)
- + See Zoom™ SDK product brief for more information



PXA270 Card Engine Block Diagram

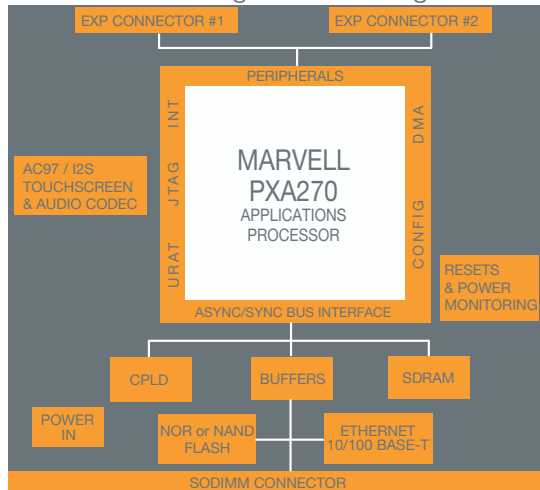

PXA270 Card Engine Ordering Information

| Logic Model Number | Speed (MHz) | SDRAM (MB) | NAND Flash (MB) | NOR Flash (MB) | Touch | Audio | Ethernet | Temp (°C) |
|--------------------------|-------------|------------|-----------------|----------------|-------|-------|----------|-----------|
| CENGPXA270-312-10-550ECR | 312 | 64 | 64 | 0 | Y | Y | – | 0 – 70 |
| CENGPXA270-416-10-550EIR | 416 | 64 | 64 | 0 | Y | Y | – | -40 – 85 |
| CENGPXA270-416-10-550HIR | 416 | 64 | 64 | 0 | Y | Y | Y | -40 – 85 |
| CENGPXA270-520-10-504HCR | 520 | 64 | 0 | 32 | Y | Y | Y | 0 – 70 |
| CENGPXA270-520-10-550HCR | 520 | 64 | 64 | 0 | Y | Y | Y | 0 – 70 |

PXA270 ZOOM™ SDK Ordering Information

| Logic Model Number | SOM Configuration | Recommended Resale |
|-------------------------|--------------------------|--------------------|
| SDK-PXA270-520-10-6432R | CENGPXA270-520-10-504HCR | \$499 |

LOGIC WEBSITE :: DESIGN RESOURCES:

- +Logic Technical Support : <http://www.logicpd.com/support/>
- +Technical Discussion Group : <http://www.logicpd.com/support/tdg/>
- +Frequently Asked Questions (FAQ) : <http://www.logicpd.com/support/faq/>
- +For more information contact Logic Sales : product.sales@logicpd.com



embedded product solutions

411 N. Washington Ave. Suite 400 Minneapolis, MN 55401
T : 612.672.9495 F : 612.672.9489 I : www.logicpd.com



Product Features

Processor

- +Marvell PXA270 Applications Processor running at 312, 416, or 520 MHz

SDRAM Memory

- +64 MB SDRAM standard

Flash Memory

- +Choice of 64 MB NAND or 32 MB NOR

Display

- +Programmable color LCD controller
- +Built-in driver supports up to 800x600 with 16-bit LCD interface

Touch Screen

- +Integrated 4-wire touch screen controller

Network Support

- +10/100 Base-T Ethernet controller for application/debug (SMSC LAN 91C111)

Audio

- +AC97 audio codec

PC Card Expansion

- +CompactFlash Type I card (memory-mapped mode only)
- +Smart Card, MMC/SD, dual PCMCIA interfaces

USB

- +USB 2.0 full-speed host and device interface

Serial Ports

- +Three 16C550 compatible UARTs, two I2C

IrDA

- +SIR supports up to 115.2 Kbps, multiplexed IrDA/Bluetooth

GPIO

- +Programmable I/O depending on peripheral requirements

Software

- +LogicLoader™ (bootloader/monitor)
- +Windows Embedded CE 5.0 BSP

Mechanical

- +60.2 mm wide x 67.8 mm long x 4.4 mm high

RoHS Compliant