

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

**PRODUCT BRIEF:**

Logic :: AMD


## AMD GEODE™ LX 800 System on Module

**The AMD Geode LX 800 System on Module (SOM) is a compact, low-power x86, product-ready hardware and software solution that fast forwards your embedded design.**

The AMD Geode LX 800 SOM-ETX offers essential features for building small form factor and embedded PC systems. Use of custom baseboards makes the SOM-ETX the ideal foundation for OEMs developing handheld and compact products. The SOM-ETX provides a common reference pin-out on its expansion connectors, which enables easy scalability to next generation microprocessor SOMs when new functionality or performance is required.

Application development is performed right on the product-ready AMD Geode LX 800 SOM-ETX, which enables you to seamlessly transfer your application code and hardware into production.

The AMD Geode LX 800 SOM-ETX is ideal for applications in the medical, point-of-sale, gaming, industrial, and security markets. From patient monitoring and medical imaging, to card payment

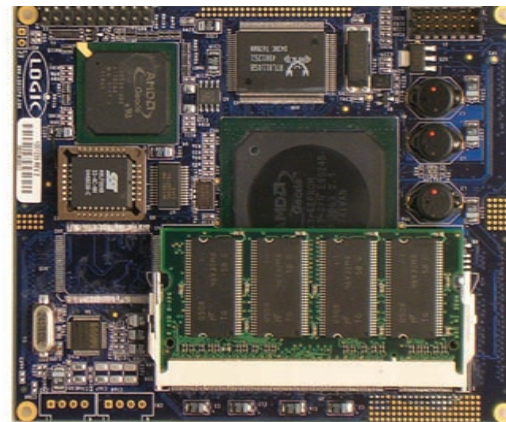

AMD GEODE LX 800 SOM-ETX

terminals and bar code readers, to CCTV cameras and intruder alarms, the AMD Geode LX 800 SOM-ETX allows for powerful versatility and long-life products.


### GEODE LX 800 SOM-ETX :: HIGHLIGHTS:

- + Product-ready System on Module
- + Compact form factor based on ETX standard (96 x 115 mm)
- + Operating system drivers available for Microsoft Windows® XP/XPe/CE and Linux
- + Fanless and ultra-low power consumption
- + Long product lifecycle
- + 0°C to 70°C (commercial temp)
- + RoHS compliant

### ZOOM™ GEODE LX DB800 :: FEATURES:

- + Mini-ITX application baseboard
- + LX 800 SOM-ETX
- + 256 MB SODIMM
- + CompactFlash interface
- + Low cost
- + See the Zoom™ Geode LX Development Kit product brief for more information

## Geode LX SOM-ETX Block Diagram

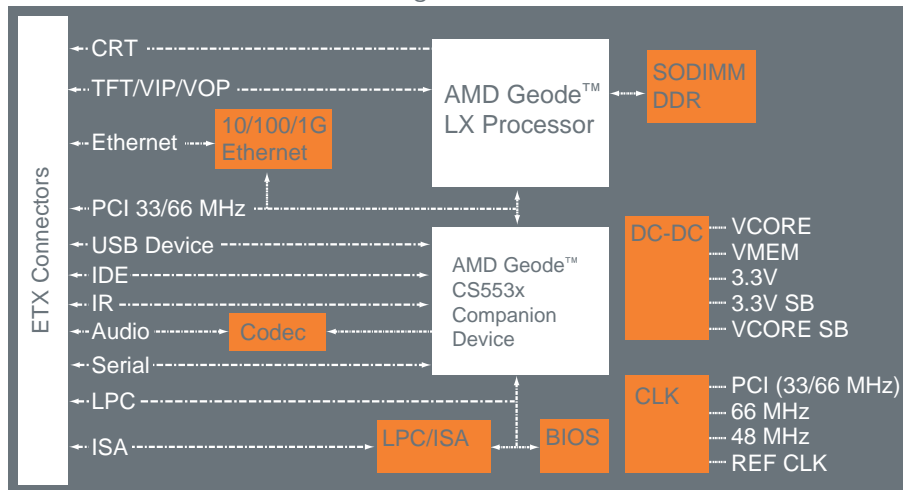

Block diagram is not drawn to scale. For reference purposes only.

## Geode LX SOM-ETX Ordering Information

Logic Model Number	Speed (MHz)	DDR Mem (MB)	Stack Height (mm)
SOMLX800-10-700GCR*	500	256	7
SOMLX800-11-000GCR	500	0	3

\*SOMLX800-10-700GCR configuration is only available with development kit and is not available in production quantities.

## ZOOM™ Geode LX Development Kit Ordering Information

Model Number	SOM Configuration	Recommended Resale
LX-DB800D-EVAL-KIT	SOMLX800-10-700GCR	\$750

### LOGIC WEBSITE :: DESIGN RESOURCES:

- + Logic Technical Support : <http://www.logicpd.com/support/>
- + Technical Discussion Group : <http://www.logicpd.com/support/tdg/>
- + Frequently Asked Questions (FAQ) : <http://www.logicpd.com/support/faq/>
- + For more information contact Logic Sales : [product.sales@logicpd.com](mailto:product.sales@logicpd.com)



embedded product solutions

411 N. Washington Ave. Suite 400 Minneapolis, MN 55401  
T : 612.672.9495 F : 612.672.9489 I : [www.logicpd.com](http://www.logicpd.com)

## Product Features

### Processor

- + AMD Geode LX 800 processor running at 500 MHz

### SDRAM Memory

- + Supports up to 512 MB—PC2700

### Display

- + TFT LCD support up to 1600x1200x32bpp
- + CRT support up to 1920x1440x32bpp at 85Hz

### Peripheral Support

- + USB 2.0—three high-speed hosts and one configurable host/device
- + Serial—three RS232, 16C550 compatible ports
- + IDE—UltraATA 133 support
- + Ethernet, 10/100/1G—Realtek 8110SB
- + AC97 audio
- + PCI, 33/66 MHz—2.2 and 3.0 compliant
- + LPC to ISA bridge—Winbond W83626F

### Flash Interface

- + Multiplexed with IDE interface supports many industry standard NAND and NOR flash

### Operating System Support

- + Microsoft Windows® XP
- + Microsoft Windows® XPe
- + Microsoft Windows® CE
- + Linux

### BIOS

- + General Software
- + Insyde Software

### Mechanical

- + 96 mm wide x 115 mm long x 12 mm high

### RoHS Compliant

