


## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

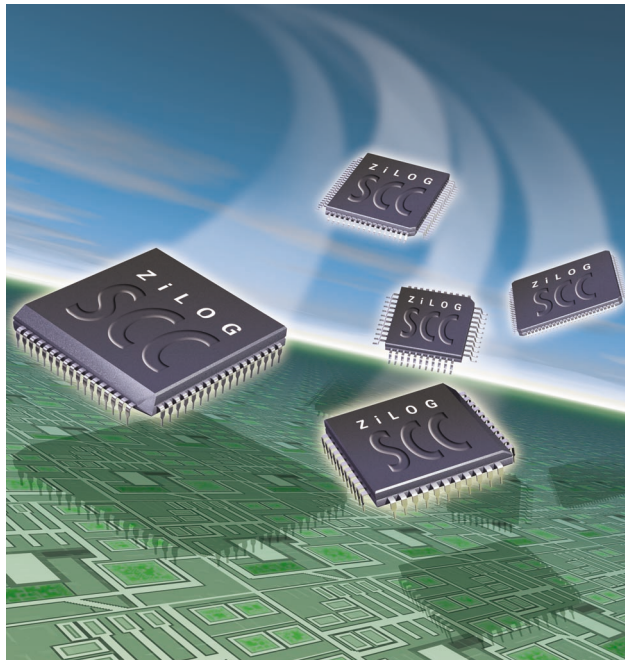

# SCC

## ZiLOG's Family of Serial Communication Controllers

### ZiLOG Sets the standards for SCCs

For over 20 years ZiLOG has set the standard for Serial Communication Controllers. Based on the industry acclaimed SCC core, ZiLOG offers a wide variety of Serial Communication Controllers to meet your application requirements.

### Reduces the need for external logic

ZiLOG SCCs offer low power consumption, higher performance, and superior noise immunity. The many on-chip features offered in ZiLOG SCCs help dramatically to reduce the need for external logic and code development found in most of the competition.

### 8-bit Solutions

The standard serial and integrated communications controller, Z85C30, allows you to easily implement a fully integrated solution for many networking applications. The enhanced dual and mono SCCs, the Z80230, Z85230 and the Z85233, include many features that make programming easy. These parts also reduce CPU overhead, allowing the programmer to select packet handling response and improve cycle access recovery time.

### 8-bit Features include:

- Dual full-duplex channels (Z80230/Z85C30/Z85230)
- Single full-duplex channel (Z85233)
- Ability to accommodate a crystal oscillator, baud rate generator, and digital phase-locked loop on each channel
- Processing speeds up to 5Mbps
- Multi-protocol format (async, monosync, bisync, SDLC/HDLC, SDLC/HDLC loop)
- Encodes in the follow modes: NRZI, FM0, FM1 and Manchester
- CRC-16 or CRC-CCITT error detection
- 4-byte Transmit FIFO/8-byte Receive FIFO (Z80230/Z85230/Z85233)
- 1-byte transmit FIFO/3-byte receive FIFO (Z85C30)

### 16-bit Solutions

The standard and integrated universal serial controllers, Z16C30 and the Z16C32 offer 16-bit performance, with processing speeds up to 20 Mbps.

### 16-bit Features include:

- Single (Z16C32) and dual (Z16C30) full-duplex channels
- Accommodates two baud rate generators and one digital phase-locked loop
- Processing speeds up to 10Mbps (Z16C30) and 20Mbps (Z16C32)
- Multi-protocol format (async, monosync, slaved monosync, bisync, isochronous, nine-bit, SDLC/HDLC, SDLC/HDLC loop)

*(additional 16-bit features on back)*



*Additional 16-bit features*

- Encodes in the following modes: NRZ, NRZI-Mark, NRZI-Space, Bi-Phase-Mark (FM1), Bi-Phase-Space (FM0), Bi-Phase-Level (Manchester), Differential Bi-Phase-Level
- CRC-32, CRC-16 and CRC-CCITT
- 32-byte Transmit FIFO/32-byte Receive FIFO
- 2 DMA control signals per channel (Z16C30)
- Transmit and receive DMA controllers with single buffer, pipelined, array and linked-list modes (Z16C32)
- 16-Bit Transfers
- Two transmit and two receive DMA channels (Z16C35 only)

Serial Family	Channels	DMA Controllers	Bus Interface	MHz	Part number	Package	Pins	Op. Temp. (°C)
SCC	2	0	Multiplex	8	Z80C3008PSC	DIP	40	0 +70
					Z80C3008VSC	PLCC	44	0 +70
				10	Z80C3010PSC	DIP	40	0 +70
					Z80C3010VSC	PLCC	44	0 +70
			Nonmultiplex	8	Z85C3008PEC	DIP	40	-40 +105
					Z85C3008PSC	DIP	40	0 +70
				10	Z85C3008VEC	PLCC	44	-40 +105
					Z85C3008VSC	PLCC	44	0 +70
			16	Z85C3010PEC	DIP	40	-40 +105	
				Z85C3010PSC	DIP	40	0 +70	
				Z85C3010VEC	PLCC	44	-40 +105	
				Z85C3010VSC	PLCC	44	0 +70	
ESCC	2	0	Multiplex	10	Z8023010PSC	DIP	40	0 +70
					Z8023010VSC	PLCC	44	0 +70
				16	Z8023016PSC	DIP	40	0 +70
					Z8023016VSC	PLCC	44	0 +70
			Nonmultiplex	8	Z8523008PSC	DIP	40	0 +70
					Z8523008VEC	PLCC	44	-40 +105
				10	Z8523008VSC	PLCC	44	0 +70
					Z8523010PEC	DIP	40	-40 +105
			16	Z8523010PSC	DIP	40	0 +70	
				Z8523010VEC	PLCC	44	-40 +105	
			20	Z8523010VSC	PLCC	44	0 +70	
				Z8523016PEC	DIP	40	-40 +105	
Z8523016PSC	DIP	40		0 +70				
Z8523016VEC	PLCC	44		-40 +105				
EMSCC	1	0	Nonmultiplex	10	Z8523310FSC	PQFP	44	0 +70
					Z8523310VSC	PLCC	44	0 +70
				16	Z8523316FSC	PQFP	44	0 +70
					Z8523316VSC	PLCC	44	0 +70
USC	2	0	Multiplex and nonmultiplex	10	Z16C3010AEC	LQFP	100	-40 +105
					Z16C3010ASC	LQFP	100	0 +70
				16	Z16C3010VEC	PLCC	68	-40 +105
					Z16C3010VSC	PLCC	68	0 +70
IUSC	1	2	Multiplex and nonmultiplex	20	Z16C3220FSC	PQFP	80	0 +70
				Z16C3220VSC	PLCC	68	0 +70	
ISCC	2	2	Multiplex and nonmultiplex	10	Z16C3510VSC	PLCC	68	0 +70
				16	Z16C3516VSC	PLCC	68	0 +70