

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



# CORTINA<sup>TM</sup>

## Product Brief


### Cortina Systems® IXF1024 24-Port 10/100/1000 Mbps Ethernet Media Access Controller

#### Product Description

The Cortina Systems® IXF1024 24-Port 10/100/1000 Mbps Ethernet Media Access Controller (IXF1024 MAC) is a highly integrated device that allows 2:1 oversubscription, which helps lower the cost per port. A SPI-4.2 system interface allows direct connection to network processors and forwarding engines. Advanced data path management techniques are used to funnel 24 Gigabits of bandwidth across a 10 Gbps system interface. This oversubscription of bandwidth is practical as client server networks rarely utilize full bandwidth at the network edge.


To implement oversubscription, Cortina Systems, Inc. (Cortina™) has included data path management functions such as rate limiting on a per port basis, priority queuing, IEEE 802.3\* compliant flow control, and programmable packet filtering. The device provides per port traffic statistics for performance monitoring, according to RMON RFC2819.

The IXF1024 MAC is implemented in 0.13 μ CMOS technology and is packaged in a 672 Ball Grid Array (BGA) and requires two supply voltages, 1.2 V for the digital core and 2.5 V for the I/O.

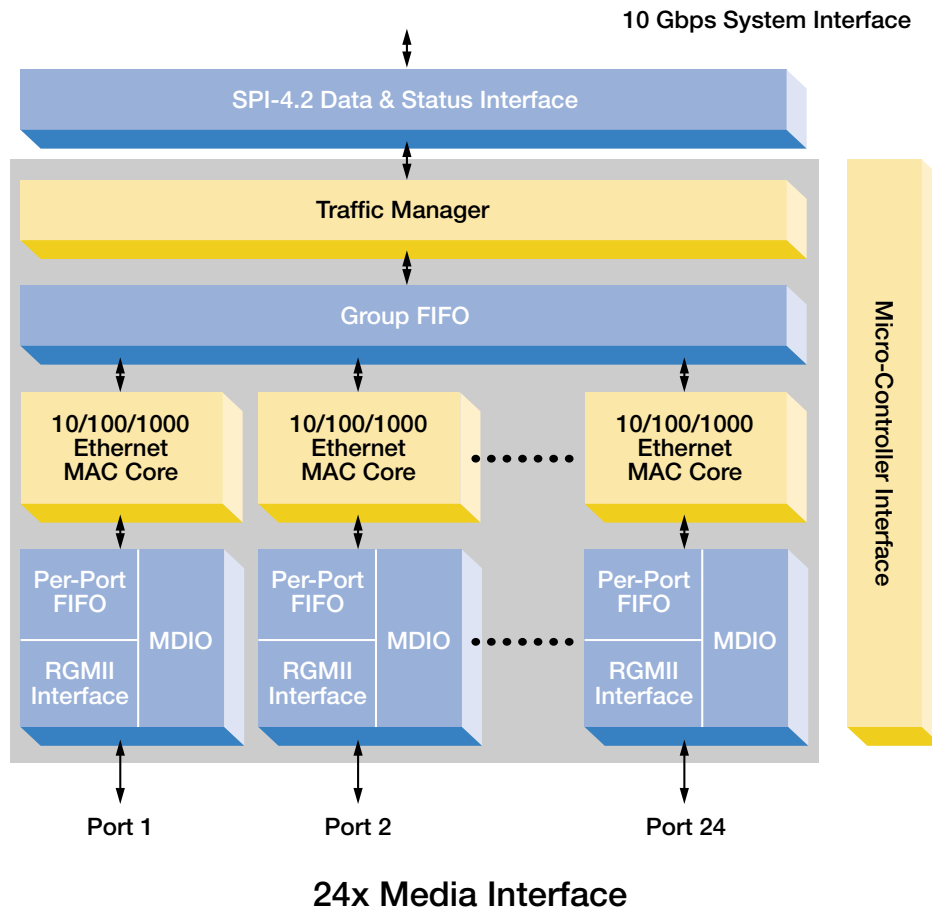

#### IXF1024 MAC Block Diagram

## Typical Application of the IXF1024 MAC

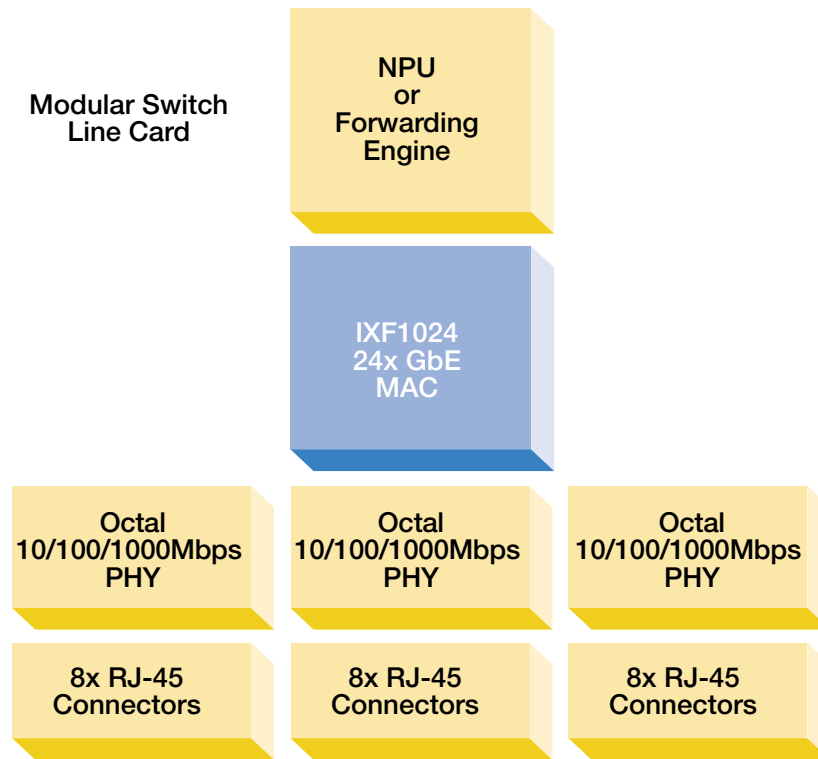

Features	Benefits
<ul style="list-style-type: none"> <li>• 24-Port 10/100/1000 Mbps Ethernet MAC</li> </ul>	<ul style="list-style-type: none"> <li>• High integration allows practical implementations of 24, 48 and 96-port line cards</li> </ul>
<ul style="list-style-type: none"> <li>• 2:1 Oversubscription</li> </ul>	<ul style="list-style-type: none"> <li>• Optimizes bandwidth usage at the network edge and reduces cost per port</li> </ul>
<ul style="list-style-type: none"> <li>• Advanced Data Path Management</li> </ul>	<ul style="list-style-type: none"> <li>• Enables oversubscription without switch congestion and packet loss</li> </ul>
<ul style="list-style-type: none"> <li>• Automatic Flow Control per IEEE 802.3*</li> </ul>	<ul style="list-style-type: none"> <li>• Standard compliant method for flow control that reduces control processor load</li> </ul>
<ul style="list-style-type: none"> <li>• Packet Filtering and Priority Queuing</li> </ul>	<ul style="list-style-type: none"> <li>• Allocates bandwidth to priority traffic</li> </ul>
<ul style="list-style-type: none"> <li>• SPI-4.2 system side interface</li> </ul>	<ul style="list-style-type: none"> <li>• Connects directly to network processors or custom forwarding engines</li> </ul>
<ul style="list-style-type: none"> <li>• Flexible CPU interface</li> </ul>	<ul style="list-style-type: none"> <li>• Supports a variety of 8/16/32-bit configurations</li> </ul>
<ul style="list-style-type: none"> <li>• Typical Power Consumption - 0.25 W per channel</li> </ul>	<ul style="list-style-type: none"> <li>• Allows line card implementations with high port count</li> </ul>

## Key Applications

- Modular Ethernet Switching Equipment at the Network Edge
- Enterprise and Multi-service Edge Routers

## Cortina in Communications

Cortina is a leading supplier of intelligent communication solutions through continuous innovations in advanced port processing and intelligent port connectivity to the Core, Metro, Access and Enterprise Market Segments. With our state-of-the-art high speed analog digital integration, we deliver a wide suite of products that address our customers'

performance, density and flexibility needs enabling faster time-to-market, longer time-in-market, and increased revenue opportunities. Working closely with our customers to understand their system requirements and anticipate their needs, we are creating the foundation ingredients for new generations of services.

\*Other names and brands may be claimed as the property of others.

