

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# VSC7281

VITESSE

## Dual XAUI – Single XGMII Quad 0.95 Gbps to 3.25 Gbps Transceiver




### APPLICATIONS:

- ▶ 10 Gigabit Ethernet and Fibre Channel Links
  - XENPAK, X2, XPAK Module Connections
- ▶ High Speed Serial Backplanes
  - XAUI Channel
  - Independent Channel Control
- ▶ Box-to-Box Serial Communications
  - Copper, Coax, and Fiber

### SPECIFICATIONS:

- ▶ Packaged in a 324-pin, 19mm x 19mm TEPBGA
- ▶ Input Termination, Internal 100Ω Differential
- ▶ Input Signal Detection and Signal Equalization
- ▶ Multiple Internal Clocking Modes

### BLOCK DIAGRAM:

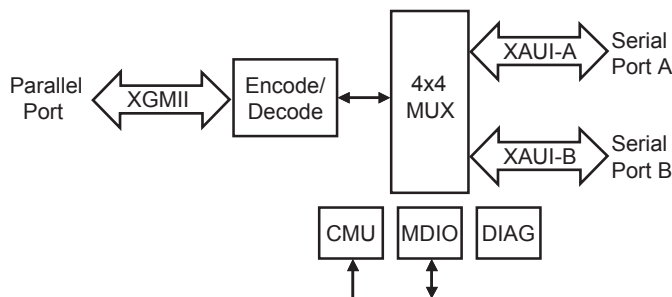

### FEATURES:

- ▶ IEEE802.3ae 10 Gigabit Ethernet Compliant
- ▶ ANSI 10Gb Fibre Channel Compliant
- ▶ Dual XAUI Serial Bus
- ▶ Single XGMII Parallel Bus
- ▶ 0.95 Gbps to 3.25 Gbps Quad SerDes/Transceiver
- ▶ XAUI Compliant Retimer and Repeater Modes
- ▶ Simultaneous Operation at Multiple Frequencies
- ▶ Programmable Pre-Emphasis and Signal Equalization
- ▶ 8B/10B Encoder/Decoder with Optional Bypass
- ▶ Programmable Rate Matching Characters
- ▶ Elastic Buffer for Intra/Inter-Chip Deskewing and Channel-to-Channel Alignment
- ▶ Received Data Aligned to Local REFCLK or to Recovered Clock
- ▶ TX and RX Rate Matching for FC, 1GbE, and InfiniBand™
- ▶ Output Reduced Swing Level for Optics
- ▶ Serial and Parallel Loopback
- ▶ Fast Locking CRU
- ▶ Flexible CMU Operation
- ▶ IEEE802.3 MDIO Register Interface
- ▶ Multiple Built-In-Self Test Diagnostics and Counters
  - PRBS, CRPAT, CJPAT Pattern Generation
- ▶ JTAG Boundary Scan
- ▶ HSTL1.5 and HSTL1.8 Parallel I/O

## Dual XAUI – Single XGMII Quad 0.95 Gbps to 3.25 Gbps Transceiver

### GENERAL DESCRIPTION:



The VSC7281 is a Dual XAUI – Single XGMII Transceiver tailored for 10 Gigabit Ethernet (10GbE) and 10 Gigabit Fibre Channel (10GFC) applications. The feature set and flexibility of these devices make them perfectly suited for Backplane and other Serial Interconnect applications such as Serial Rapid I/O, PCI Express and XAUI.

With four channels of serial transmitter/receiver pairs, these transceivers can deliver a duplex data rate of greater than 20 Gbps. These serial channels can be configured for independent operation, or as fully 10GbE/10GFC compliant XAUI (10 Gigabit Attachment Unit Interface) serial buses. The parallel bus is fully XGMII (10 Gigabit Media Independent Interface) compliant. When independent channel operation is required, the parallel bus can be configured for either 8- or 10-bit operation with the ability to enable or bypass the internal 8B/10B encoders/decoders.


No additional external logic is required for the basic operation of this device. However, for flexibility and systems adaptability, an MDIO (Management Data Input/Output) interface is provided for internal register access. These registers are MDIO compliant and allow for monitoring and configuration of special modes for diagnostics, BIST (Built-In-Self Test), and various control of special channel features, such as pre-emphasis, cable equalization, reduced output swing, loopback, signal detection and XAUI port selection.

The flexibility of this device is not only seen in the MDIO register programmable feature set, but also in a wide range of supported frequencies. With a serial data rate that can range from 0.95 Gbps to 3.25 Gbps, this device supports multiple communication applications such as Fibre Channel, InfiniBand, and Ethernet. The VSC7281 has the functionality to support these common rates simultaneously with a single external reference clock.

Whether the application is a high-speed backplane, chassis-to-chassis communication or an optical link, these devices can provide the flexibility and reliability required in today's high-end Data Communication systems.

### MODES OF OPERATION:


The VSC7281 allow for flexibility in multiple systems environments.

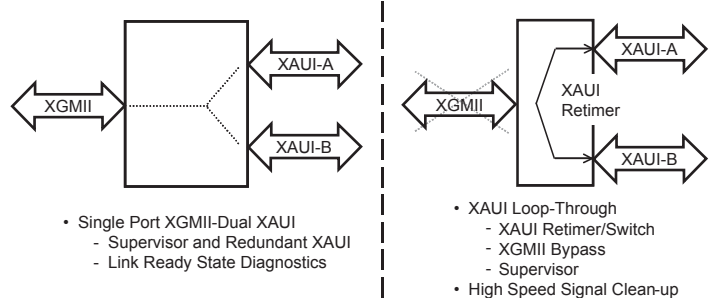


### APPLICATIONS:

#### 10 Gigabit Ethernet Port Application

- Driving out-of-box optics or backplane

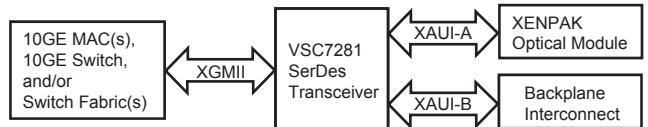

#### 2GFC and 1GFC Simultaneous Operation

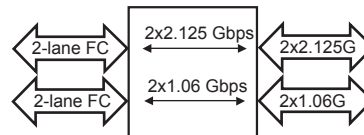

For more information on Vitesse Products visit the Vitesse web site at [www.vitesse.com](http://www.vitesse.com) or contact Vitesse Sales at (800) VITESSE or [sales@vitesse.com](mailto:sales@vitesse.com)

Vitesse, ASIC-Friendly, FibreTimer, TimeStream and Snoop Loop are trademarks of Vitesse Semiconductor Corporation. All other trademarks or registered trademarks mentioned herein are the property of their respective holders. Vitesse Semiconductor Corporation ("Vitesse") retains the right to make changes to its products or specifications to improve performance, reliability or manufacturability. All information in this document, including descriptions of features, functions, performance, technical specifications and availability, is subject to change without notice at any time.

## VITESSE

741 Calle Plano  
Camarillo, CA 93012, USA  
Tel: +1 805.388.3700  
Fax: +1 805.987.5896  
[www.vitesse.com](http://www.vitesse.com)