

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .




Tsi109 Host Bridge for PowerPC™ Product Brief

Device Overview

The IDT Tsi109 is an advanced host bridge for PowerPC processors that supports PCI-X, DDR2-400 SDRAM, Gigabit Ethernet, and Flash. The device contains numerous integrated features that enable customers to reduce system design complexity and system costs. As a result, the Tsi109 has the best price/benefits ratio on the market.

The Tsi109 builds on a decade of IDT design experience in PowerPC host bridging. It delivers industry-leading performance for customers in the wireless infrastructure, storage networking, network access, printer, military, and industrial automation markets.

Block Diagram

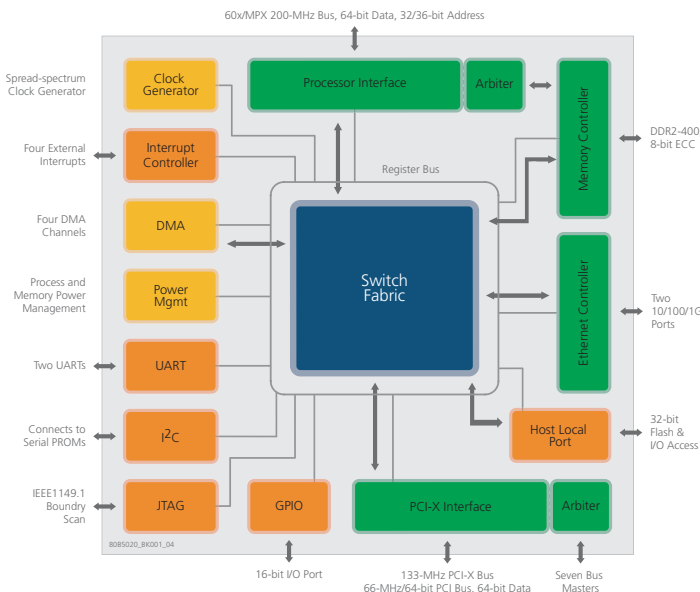

Enhancing System Performance

The advanced Switch Fabric architecture of the Tsi109 allows designers to significantly enhance system performance. The Ethernet Controller and PCI-X Interface offer superior data transfer rates. In addition, CPU to memory performance is exceptional due to features like configurable port arbitration priority and queuing reads ahead of writes.

Minimizing System Cost

The Tsi109 feature set provides system designers with an array of integrated functionality to assist in lowering overall system cost, such as an integrated Clock Generator with spread-spectrum capabilities, a DDR2-400 Memory Controller, and internal processor and PCI-X bus arbiters.

Simplifying Design

Tsi109's flexible configuration options empower designers to develop their systems quickly and efficiently. Selection of PCI/PCI-X modes, an integrated Clock Generator, DDR2 support, and the ability to configure it as a PCI Host/Agent, all enable the Tsi109 to be used in a range of applications. The JTAG Interface also simplifies the debug process by allowing access to Tsi109's registers without impacting active transactions.

Effective Power Management

The Tsi109 is the lowest, power-consuming host bridge on the market. It minimizes active power by disabling unused ports and clocks, while its integrated Clock Generator saves power over discrete devices. Its support for DDR2 provides memory power savings of up to 50 percent when compared with DDR. It also supports precharge power-down and quiet stand-by power reduction modes on memory. In addition, the Tsi109 conforms to the PCI Bus Power Management Interface Specification.

Features

Processor Interface

- Supports PowerPC processors:
 - Freescale MPC74xx
 - IBM PPC 750xx
- Operates up to 200 MHz in single processor mode
- Operates up to 167 MHz in dual processor mode

PCI/X Interface

- Supports PCI 2.3 and PCI-X 1.0 modes
- Operates up to 133 MHz
- Supports PCI/X Host or Agent operation
- Supports CompactPCI Hot Swap

Memory Controller

- Supports DDR2-400 devices
- Operates up to 200 MHz
- Enhanced memory pipeline

Other Features

- Integrated bus arbiters for processors and PCI/X devices
- Integrated power management of processors and memory devices
- Four independent DMA/XOR channels
- Clock generator with spread-spectrum capability
- Two independent Gigabit Ethernet ports
- HLP Interface for Flash and other simple I/O devices
- Two UARTs

Tsi109 Product Brief

- 16-bit parallel GPIO port
- I2C/EEPROM Interface
- Programmable Interrupt Controller
- JTAG support (Boundary scan) with register access capability
- Packaging: 1023-pin, 33x33 mm, fcBGA, RoHS-compliant, pin compatible with Tsi108
- Power consumption: 2.5W typical, 3.8W maximum

Benefits

- Enhances system performance by delivering low latency and high throughput across its Processor, PCI-X, and Ethernet interfaces
- Simplifies system design by offering numerous, highly configurable features
- Reduces system cost by providing a variety of integrated functions
- Enables designers to use the lowest power consuming interconnect product on the market

Typical Applications


The following examples illustrate the Tsi109 in two typical applications.

Printer Controller Board

The Tsi109 feature set is ideally suited for printer applications. The Clock Generator eliminates the need for external clock circuitry and provides spread-spectrum capability for reducing EMI. The device provides power management for processors, memory, and PCI/X devices, in order to keep idle power at a minimum. In addition, the Tsi109's support for various PowerPC processor lines allows performance scalability with a common design.

Processor PMC

The Tsi109 is well suited for a variety of Processor PMC (PrPMC) embedded applications (see figure). The Clock Generator eliminates the need for external circuitry on the limited real estate of the PrPMC form factor, while the DDR2 Memory Controller provides cost, power, and life expectancy advantages over DDR. Aggressive active power management modes also makes the Tsi109 the lowest power-consuming host bridge product on the market.

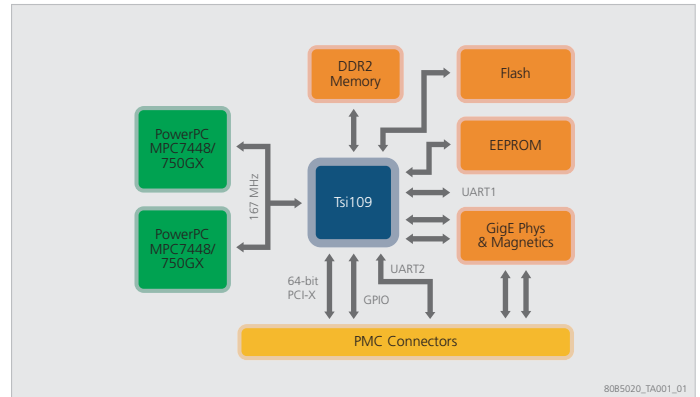

NOT AN OFFER FOR SALE

The information presented herein is subject to a Non-Disclosure Agreement and is for planning purposes only. Nothing contained in this presentation, whether verbal or written, is intended as, or shall have the effect of, a sale or an offer for sale that creates a contractual power of acceptance.



CORPORATE HEADQUARTERS
6024 Silver Creek Valley Road
San Jose, CA 95138

for SALES:
800-345-7015 or 408-284-8200
fax: 408-284-2775
www.idt.com

for Tech Support:
email: EHBhelp@idt.com
phone: 408-360-1538
document: 80B5020_FB001_06