

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

TERMSERIES
RSS112060 60VDC-REL1U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Order No.	406160000
Type	RSS112060 60VDC-REL1U
Version	TERMSERIES, Relais, No. of contacts: 1, CO contact, AgNi 5µm Au, Rated control voltage: 60 V DC, Continuous current: 6 A, Plug-in connection
GTIN (EAN)	4032248252299
Qty.	20 pc(s).

TERMSERIES
RSS112060 60VDC-REL1U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Ratings

Conductor connection system	Plug-in connection	Humidity	5...85 % rel. humidity, no condensation
Weight	5 g	UL 94 flammability rating	V-0

Dimensions and weights

Width	5 mm	Height	28 mm
Depth	15 mm	Weight	5 g
Net weight	4.56 g		

Temperatures

Operating temperature	-40 °C...+85 °C	Storage temperature	-40 °C...+85 °C
-----------------------	-----------------	---------------------	-----------------

Input

Rated control voltage	60 V DC	Rated current DC	3 mA
Coil resistance	20570 Ω ±10 %	Power rating	180 mW
Pull-in (sparkover) / drop-out voltage DC coil	42 V / 3V		

Output

Rated switching voltage	250 V AC	Max. switching voltage, AC	250 V
Max. switching voltage, DC making current	250 V / 6 A	Continuous current	6 A
Switch-on delay	< 8 ms	Max. switching power	1500 VA
Min. switching power	1 V / 1 mA	Switch-off delay	< 4 ms
		Max. switching frequency at rated load	0.1 Hz

Contact specifications

No. of contacts	1	Contact design	CO contact
Contact material	AgNi 5µm Au	Mechanical service life	5 x 10 ⁶ switching cycles

Insulation coordination

Clearance and creepage distances for control side - load side	≥ 5.5 mm	Dielectric strength for control side - load side	4 kV _{eff} / 1 min.
Impulse withstand voltage	6 kV (1.2/50 µs)	Protection degree	IP 67

Other technical data

Version	Relay
---------	-------

Further details of approvals / standards

Standards	IEC 61810-1, UL508
-----------	--------------------

Classifications

ETIM 2.0	EC001437	ETIM 3.0	EC001437
UNSPSC	30-21-19-17	eClass 4.1	40-02-06-14
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-03
eClass 7.0	27-37-16-03		

Data sheet...

TERMSERIES
RSS112060 60VDC-REL1U

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Approvals





Approvals



**TERMSERIES
RSS112060 60VDC-REL1U**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

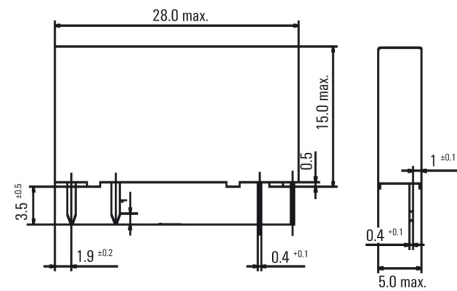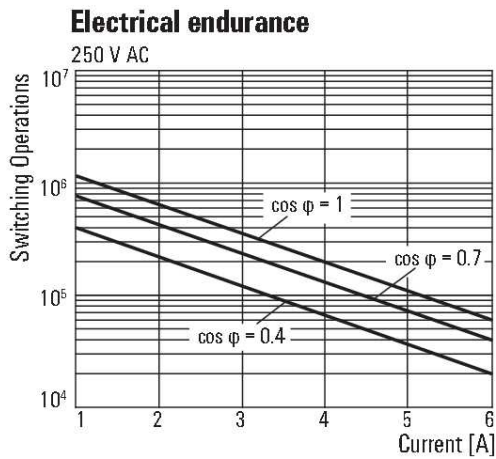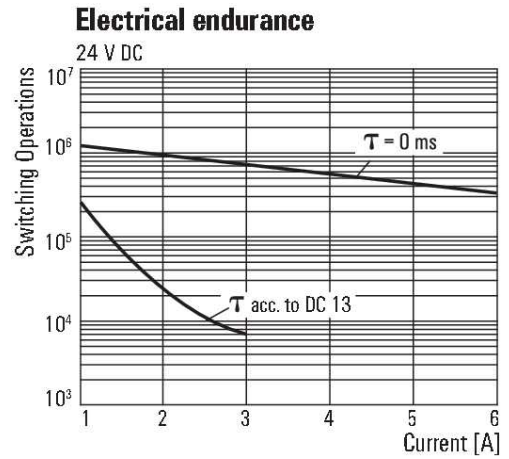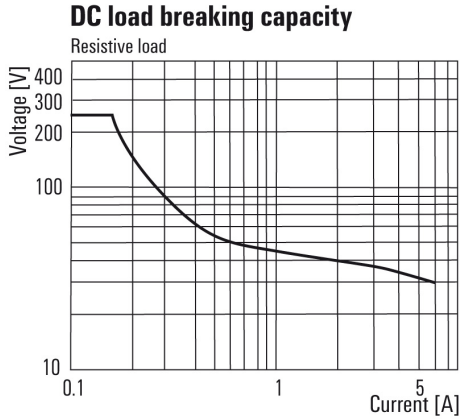


TERMSERIES RSS112060 60VDC-REL1U

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

Screw connection



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.
1123320000	TRS 230VAC RC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Screw connection	4032248905522	10 pc(s).
1123310000	TRS 120VAC RC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Screw connection	4032248905317	10 pc(s).
1123290000	TRS 120VUC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Screw connection	4032248905461	10 pc(s).
1123300000	TRS 230VUC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Screw connection	4032248905515	10 pc(s).
1123280000	TRS 60VUC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Screw connection	4032248905270	10 pc(s).

Tension clamp connection



TERMSERIES accessories include:

- Spare relay
- Base
- Partition plates
- Cross-connections
- Power-feed modules

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.
1123430000	TRZ 120VAC RC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Tension clamp connection	4032248905188	10 pc(s).
1123410000	TRZ 120VUC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Tension clamp connection	4032248905690	10 pc(s).
1123440000	TRZ 230VAC RC 1CO EMPTY	TERMSERIES, Relay base, Continuous current: 10 A, Tension clamp connection	4032248905171	10 pc(s).

Creation date March 8, 2013 10:49:04 PM CET

**TERMSERIES
RSS112060 60VDC-REL1U**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

[1123420000](#) TRZ 230VUC 1CO EMPTY

TERMSERIES, Relay base, 4032248905683 10 pc(s).
Continuous current: 10 A,
Tension clamp connection

[1123400000](#) TRZ 60VUC 1CO EMPTY

TERMSERIES, Relay base, 4032248905546 10 pc(s).
Continuous current: 10 A,
Tension clamp connection