

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com



Standard relays in the RIDERSERIES RPW.

- 3 CO contacts
- Optionally AC or DC coils
- Mechanical operating display

**General ordering data**

Order No.	<a href="#">8690810000</a>
Type	RPW705730
Version	RIDERSERIES, Relais, No. of contacts: 3, CO contact, AgCdO, Rated control voltage: 230 V AC, Continuous current: 16 A, Plug-in connection
GTIN (EAN)	4032248361397
Qty.	25 pc(s).

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Ratings**

Conductor connection system	Plug-in connection	Humidity	40 °C / 93 % rel. humidity, no condensation
Weight	81 g	UL 94 flammability rating	V-0

**Dimensions and weights**

Width	38.5 mm	Height	35.5 mm
Depth	48.5 mm	Weight	81 g
Net weight	94.64 g		

**Temperatures**

Operating temperature	-45 °C...+50 °C	Storage temperature	-40 °C...+50 °C
-----------------------	-----------------	---------------------	-----------------

**Input**

Rated control voltage	230 V AC	Rated current AC	11.7 mA
Coil resistance	7,500 Ω ±10 %	Power rating	2.8 VA
Response / drop-out voltage AC coil	184 V / 69 V	Status indicator	Mechanical

**Output**

Rated switching voltage	400 VAC	Max. switching voltage, AC	440 V
Continuous current	16 A	making current	40 A / 20 ms
Max. switching power	6000 VA	Response time	15 ms / 10 ms
Min. switching power	24 V / 100 mA	Max. switching frequency at rated load	0.1 Hz

**Contact specifications**

No. of contacts	3	Contact design	CO contact
Contact material	AgCdO	Mechanical service life	20 x 10 <sup>6</sup> switching cycles

**Insulation coordination**

Rated voltage	250 V	Clearance and creepage distances for control side - load side	≥ 4 mm
Dielectric strength for control side - load side	2.5 KV <sub>eff</sub> / 1 min.	Impulse withstand voltage	4 kV (1.2/50 μs)
Protection degree	IP 20	Insulating material group	IIIa

**Other technical data**

Version	With lug, without test button	Status indicator	Mechanical
Free-wheel diode	No		

**Further details of approvals / standards**

Standards	IEC 61810-1, UL508
-----------	--------------------

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
UNSPSC	30-21-19-17	eClass 4.1	40-02-06-14
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01
eClass 7.0	27-37-16-01		

**Approvals**




Approvals

**Downloads**Declaration of Conformity [K295\\_12\\_10.pdf](#)

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

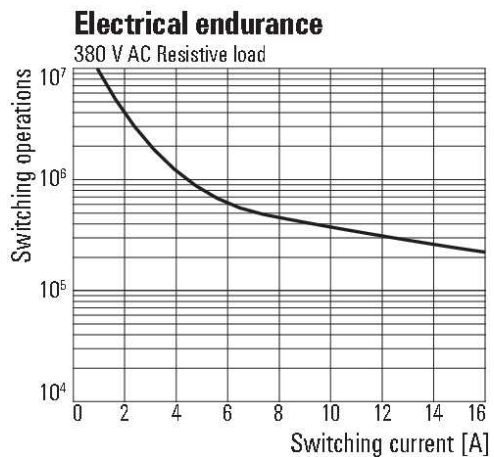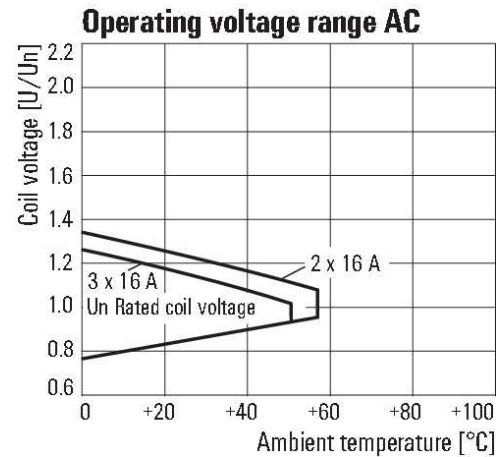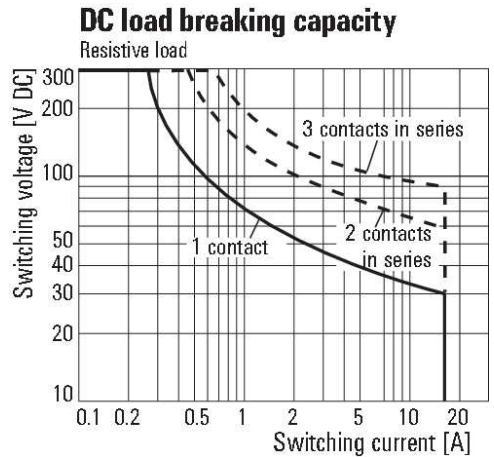

**RIDERSERIES  
RPW705730**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

<b>Type code</b>	RPW				
<b>Typ</b>	RIDER PoWer				
<b>Contacts</b>	2 2 change-over contacts 7 3 change-over contacts				
<b>Type of construction</b>	0 Without test button 3 With test button				
<b>Housing</b>	2 Cap without lug, 4.8 mm Faston 5 Cap with lug, 6.3 mm Faston				
					<b>DC coil</b> 006 6 V DC 012 12 V DC 024 24 V DC 048 48 V DC 060 60 V DC 110 110 V DC <b>AC coil</b> 506 6 V AC 512 12 V AC 524 24 V AC 548 48 V AC 615 115 V AC 730 230 V AC