

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

**RIDERSERIES**  
**RRD228024**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

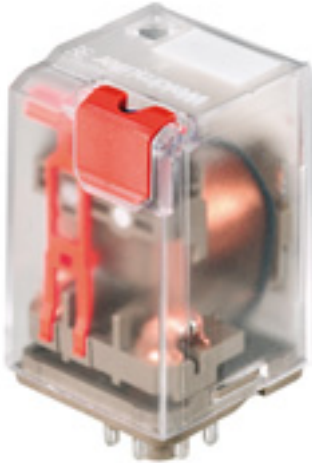

The ideal relay version for the separation of input and output signals in industrial automation.

High powers can be safely switched with the RIDERSERIES.

Conventional relays and LED indicators are simply plugged in, retaining and disassembly clips provide a secure fixing.

**General ordering data**

|            |  |
|------------|--|
| Order No.  | <a href="#">8690280000</a>   |
| Type       | RRD228024  |
| Version    | RIDERSERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 24 V AC, Continuous current: 10 A, Plug-in connection |
| GTIN (EAN) | 4032248360901  |
| Qty.       | 25 pc(s).  |

**RIDERSERIES**  
**RRD228024**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Ratings**

|                             |                    |                           |  |
|-----------------------------|--------------------|---------------------------|--|
| Conductor connection system | Plug-in connection | Humidity                  | 40 °C / 93 % rel. humidity,<br>no condensation |
| Weight                      | 80 g               | UL 94 flammability rating | V-0  |

**Dimensions and weights**

|            |         |        |         |
|------------|---------|--------|---------|
| Width      | 35.5 mm | Height | 35.5 mm |
| Depth      | 57 mm   | Weight | 80 g    |
| Net weight | 85.72 g |        |         |

**Temperatures**

|                       |                 |                     |                 |
|-----------------------|-----------------|---------------------|-----------------|
| Operating temperature | -40 °C...+50 °C | Storage temperature | -40 °C...+60 °C |
|-----------------------|-----------------|---------------------|-----------------|

**Input**

|                                     |                |                  |            |
|-------------------------------------|----------------|------------------|------------|
| Rated control voltage               | 24 V AC        | Rated current AC | 94.2 mA    |
| Coil resistance                     | 86 Ω ± 10 %    | Power rating     | 2.3 VA     |
| Response / drop-out voltage AC coil | 19.2 V / 7.2 V | Status indicator | Mechanical |

**Output**

|                         |   |  |               |
|-------------------------|---|--|---------------|
| Rated switching voltage | 240 V AC                                | Max. switching voltage, AC             | 400 V         |
| Continuous current      | 10 A                                    | making current                         | 20 A / 20 ms  |
| Max. switching power    | 2500 VA                                 | Response time                          | 15 ms / 10 ms |
| Min. switching power    | 100 mA / 5 V, 10 V / 10 mA, 24 V / 1 mA | Max. switching frequency at rated load | 0.1 Hz        |

**Contact specifications**

|                  |            |                         |                                       |
|------------------|------------|-------------------------|---------------------------------------|
| No. of contacts  | 2          | Contact design          | CO contact with test button           |
| Contact material | AgNi 90/10 | Mechanical service life | 20 x 10 <sup>6</sup> switching cycles |

**Insulation coordination**

|  |                                |   |        |
|--|--------------------------------|---|--------|
| Rated voltage                                    | 250 V                          | Clearance and creepage distances for control side - load side | ≤ 3 mm |
| Dielectric strength for control side - load side | 2.5 KV <sub>eff</sub> / 1 min. | Protection degree   | IP 20  |
| Insulating material group                        | IIIa                           |   |        |

**Other technical data**

|                  |                      |                  |            |
|------------------|----------------------|------------------|------------|
| Version          | With test button/LED | Status indicator | Mechanical |
| Free-wheel diode | No                   |                  |            |

**Further details of approvals / standards**

|           |                    |
|-----------|--------------------|
| Standards | IEC 61810-1, UL508 |
|-----------|--------------------|

**RIDERSERIES  
RRD228024**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Classifications**

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 2.0   | EC001437    | ETIM 3.0   | EC001437    |
| UNSPSC     | 30-21-19-17 | eClass 4.1 | 40-02-06-14 |
| eClass 5.1 | 27-37-16-01 | eClass 6.0 | 27-37-16-01 |
| eClass 7.0 | 27-37-16-01 |            |             |

**Approvals**

Approvals



**Downloads**

Declaration of Conformity [K295\\_12\\_10.pdf](#)





**RIDERSERIES  
RRD228024**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Pinning**

Circuit diagram  
View of connections

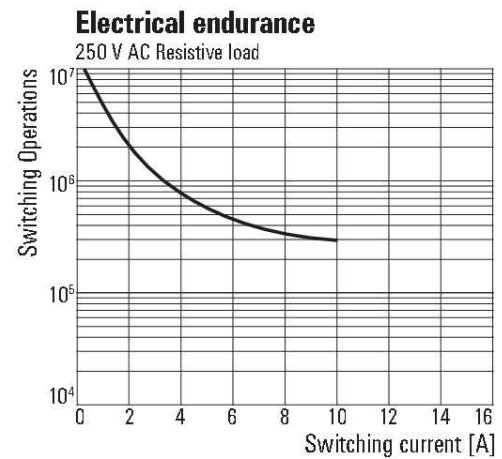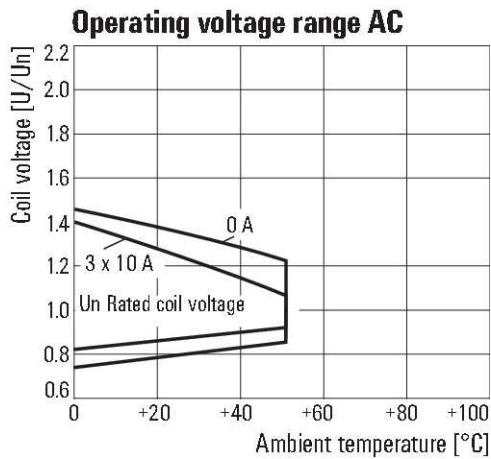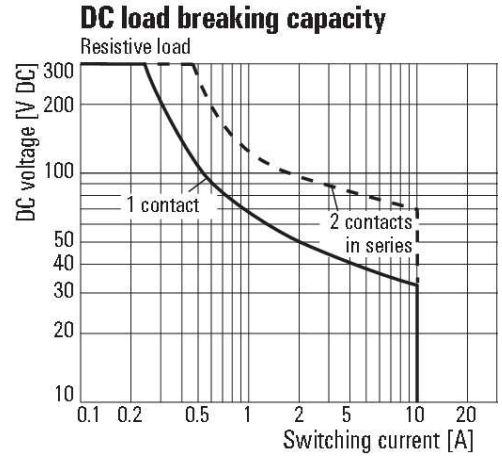

**RIDERSERIES  
RRD228024**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

|                             |  |  |  |  |  |                |                  |
|-----------------------------|--|--|--|--|--|----------------|------------------|
| <b>Type code</b>            | <b>RRD</b>   |  |  |  |  |                |                  |
| <b>Type</b>                 | RIDER RounD  |  |  |  |  |                | Free wheel diode |
| <b>Contacts</b>             | 2 2 change-over contacts, 8-pole<br>3 3 change-over contacts, 11-pole  |  |  |  |  |                |                  |
| <b>Contact material</b>     | 2 AgNi 90/10   |  |  |  |  |                |                  |
| <b>Type of construction</b> | 1 DC coil with test button<br>3 DC coil with test button and bi-polar LED<br>6 AC coil with test button<br>8 AC coil with test button and bi-polar LED |  |  |  |  |                |                  |
|                             |  |  |  |  |  | <b>DC coil</b> |                  |
|                             |  |  |  |  |  | 006 6 V DC     |                  |
|                             |  |  |  |  |  | 012 12 V DC    |                  |
|                             |  |  |  |  |  | 024 24 V DC    | 0C4              |
|                             |  |  |  |  |  | 048 48 V DC    | 0E8              |
|                             |  |  |  |  |  | 060 60 V DC    | 0G0              |
|                             |  |  |  |  |  | 110 110 V DC   | 1B0              |
|                             |  |  |  |  |  | 220 220 V DC   | 2C0              |
|                             |  |  |  |  |  | <b>AC coil</b> |                  |
|                             |  |  |  |  |  | 006 6 V AC     |                  |
|                             |  |  |  |  |  | 012 12 V AC    |                  |
|                             |  |  |  |  |  | 024 24 V AC    |                  |
|                             |  |  |  |  |  | 048 48 V AC    |                  |
|                             |  |  |  |  |  | 115 115 V AC   |                  |
|                             |  |  |  |  |  | 230 230 V AC   |                  |