

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

PARAMETER	TEST CONDITIONS	MIN.	NOM.	MAX.	UNITS
Coil Resistance		270	300	330	Ohms
Nom. Voltage			5.0		VDC
Must Operate				3.75	VDC
Must Release		0.4			VDC
Max. Switch Voltage	DC Peak AC			200	Volts
Max. Switch Current	DC Peak AC Resistive			0.5	Amps
Max. Carry Current	DC Peak AC			1.0	Amps
Max. Contact Rating	DC Resistive			10.0	Watts
Life Expectancy	At Signal Level	SEE NOTE			$10^6$ OPERATIONS
	At Rated Load	SEE NOTE			$10^6$ OPERATIONS
Static Contact Resistance (Initial)	0.050 Volt, 10 mA Contact Load			0.100	Ohms
Dynamic Contact Resistance (Initial)	0.5 Volt, 50 mA Load 100 hz, 1.5 msec after coil energized			0.200	Ohms
Insulation Resistance	Between all isolated pins @ 100 V 25 deg C, 40% relative humidity	$10^{10}$			Ohms
Dielectric Strength (Minimum)	Between Contacts	AC VRMS	300		Volts
	Contacts to Shield		*		
	Contacts and Shield to Coil	AC VRMS	1,600		Volts
Operating Time (Including Bounce)	At Nominal Voltage 30 hz Sq. wave		0.5	1.0	msec.
Released Time	Zener Diode Clamp Coil Suppression		0.1	0.5	msec.

CAPACITANCE: Across open contacts: 1.5 pF max.  
 Open contacts to coil: 2.9 pF max.  
 Closed contacts to coil: 5.6 pF max.  
 Between adjacent switches: 1.7 pF max.  
 \* Switch #1 250VAC VRMS.

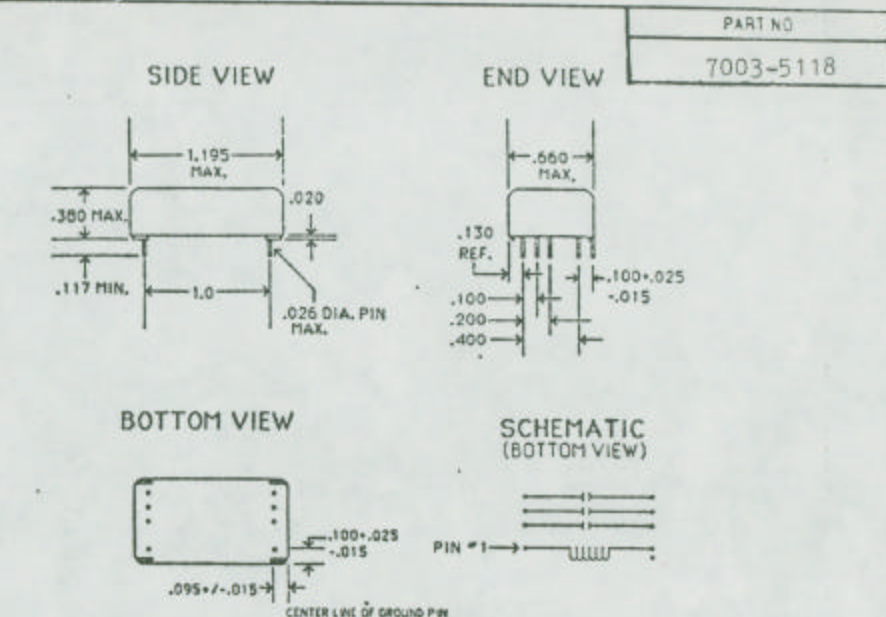

ALL DIMENSIONS ARE IN INCHES.  
 BLACK DOT ON TOP DENOTES PIN #1  
 ALL RELAYS ARE ENCAPSULATED IN A MAGNETICALLY SHIELDING STEEL SHELL THAT HAS BEEN COATED WITH A BRIGHT CHEMICALLY RESISTANT AND INSULATING EPOXY.

NOTE: SWITCH #1 TO ACTUATE 25  $\mu$ SEC BEFORE SWITCHES #2 AND #3 WITH THE COIL DRIVEN AT 5.0 VOLTS, 10 HZ MAX.

#### LIFE EXPECTANCY:

AT SIGNAL LEVEL: 5.0 V - 1.0 mA:  $250 \times 10^6$  operations nominal.  
 AT RATED LOAD: 20.0 V - 0.5 Amp:  $5 \times 10^6$  operations nominal.  
 150.0 VDC, 50 mA. with 300 mA. inrush current upon closure:  $1 \times 10^6$  operations nominal.

All parameters specified per EIA/NARM standard for dry relays No. RS-421 & RS-436. Specifications subject to change without notice. Unless otherwise noted, all parameters specified @ 25°C, 40% RH.

REVISION	CUST. P/N: MA-0256-100		
	DRAWN: T.J.	APPROVE: <i>[Signature]</i>	DATE: 10/17/89
		SCALE: N/A	PART NO.: 7003-5118
	FOR: GOULD/MODICON		
COTO CORPORATION			55 Dupont Dr. Prov., RI