

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



## SERIES 10

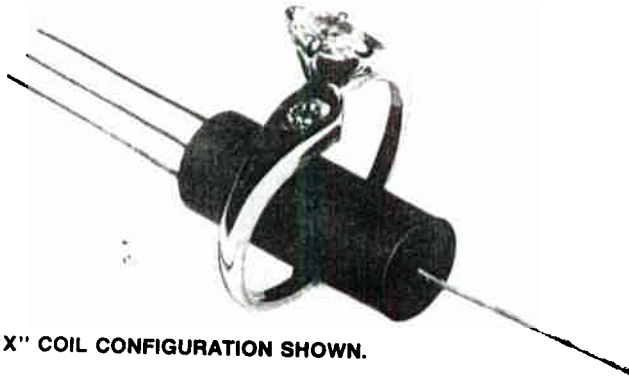

"X" COIL CONFIGURATION SHOWN.

Series 10 offers many unique design application advantages. Its unique package design manufactured using materials traceable to UL 94V-0 ratings coupled with its economical price make this relay far superior to competitive relays.

EAC's systems, procedures and controls meet MIL-Q-9858-A, and have been approved by major electronic companies and governmental agencies. Extensive equipment is available for on-line production testing of all reed relays. Quality Control procedures meet all requirements and parameters of MIL-I-45208A.

Series 10 relay family consists of 3 distinct relay types: the RX-2 for dry circuit switching, the Black Beauty for 3 to 20 watt switching, the Power-Max for 10 to 50 watt switching.

### CONTACT RATINGS (@ 20°C)

	(R) RX-2'	(B) BLACK BEAUTY	(P) POWER MAX
Voltage (Max. Switching)	200 VDC	250 VDC	300 VDC
Current (Max. Switching)	.5 amp	1 amp	2 amps
Power (Max. Switching)	5 Watts	20 Watts	50 Watts
Current (Max. Carry)	1 amp	2 amps	2 amps
Capacitance (Typical)	.2 PF	.2 PF	.2 PF
Contact Resistance (Typical)	.100 ohms	.100 ohms	.100 ohms
Operate Time (Typical)	.5 MS	.5 MS	.5 MS
Release Time (Typical)	.25 MS	.25 MS	.25 MS
Temperature	-55 to +85°C	-55 to +85°C	-55 to +85°C
Shock	200 G at 11 MS duration	200 G at 11 MS duration	200 G at 11 MS duration
Vibration	50 G at 0-2000 Hz	50 G at 0-2000 Hz	10 G at 0-2000 Hz
Insulation Resistance	10 to the 10th ohms min at RT	10 to the 10th ohms min at RT	10 to the 10th ohms min at RT

### PHYSICAL LAYOUT

Series 10 relays are constructed using 94V-0 bobbins and tubes. Reuthenium or rhodium contacts are used exclusively depending on the wattage requirements. Lead wires (.022 dia.) are plated with easily solderable tin for maximum solderability.

