

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



### FEATURES

#### 1. Excellent high frequency characteristics (~2.5GHz, Impedance 50Ω)

Frequency	to 2.5GHz
V.S.W.R. (Max.)	1.2
Insertion loss (dB, Max.)	0.2
Isolation (dB, Min.)	60


#### 2. Small size

- Size: 20.5(L) × 12.4(W) × 9.4(H) mm  
.807(L) × .488(W) × .370(H) inch

#### 3. High sensitivity

- Nominal operating power: 200 mW

#### 4. Infrequent switching type is also available. Please inquire.

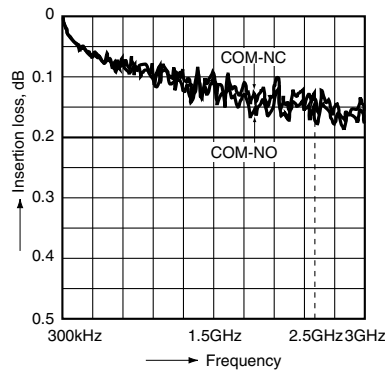


Compliance with RoHS Directive

### TYPICAL APPLICATIONS

- Cellular phone base station
- Cellular phone-related measurement devices (SP3T/SP4T switches, etc)
- Wireless LAN
- Wireless Local Loop

If you wish to use in applications with low level loads or with high frequency switching, please consult us.

### ORDERING INFORMATION

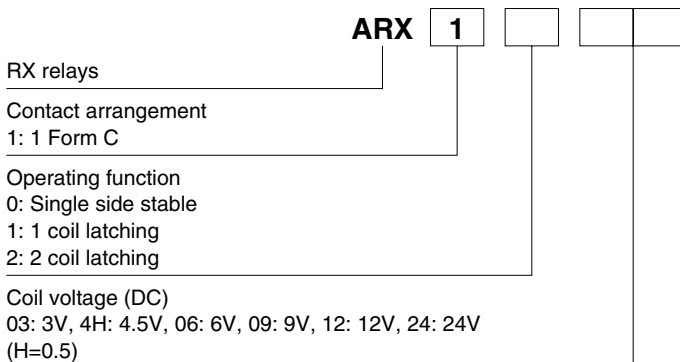

### TYPES

Nominal coil voltage	Part No.		
	Single side stable	1 coil latching	2 coil latching
3 V DC	ARX1003	ARX1103	ARX1203
4.5V DC	ARX104H	ARX114H	ARX124H
6 V DC	ARX1006	ARX1106	ARX1206
9 V DC	ARX1009	ARX1109	ARX1209
12 V DC	ARX1012	ARX1112	ARX1212
24 V DC	ARX1024	ARX1124	ARX1224

Standard packing: 50 pcs. in an inner package; 500 pcs. in an outer package

# RX (ARX)

## RATING

### 1. Coil data

#### 1) Single side stable

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 60°C 140°F)
3 V DC	75%V or less of nominal voltage (Initial)	10%V or more of nominal voltage (Initial)	66.7mA	45 Ω	200mW	110%V of nominal voltage
4.5V DC			44.4mA	101 Ω		
6 V DC			33.3mA	180 Ω		
9 V DC			22.2mA	405 Ω		
12 V DC			16.7mA	720 Ω		
24 V DC			8.3mA	2,880 Ω		

#### 2) 1 coil latching type

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 60°C 140°F)
3 V DC	75%V or less of nominal voltage (Initial)	75%V or less of nominal voltage (Initial)	66.7mA	45 Ω	200mW	110%V of nominal voltage
4.5V DC			44.4mA	101 Ω		
6 V DC			33.3mA	180 Ω		
9 V DC			22.2mA	405 Ω		
12 V DC			16.7mA	720 Ω		
24 V DC			8.3mA	2,880 Ω		

#### 3) 2 coil latching type

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 60°C 140°F)
3 V DC	75%V or less of nominal voltage (Initial)	75%V or less of nominal voltage (Initial)	133.3mA	22.5Ω	400mW	110%V of nominal voltage
4.5V DC			88.9mA	50.6Ω		
6 V DC			66.7mA	90 Ω		
9 V DC			44.4mA	202.5Ω		
12 V DC			33.3mA	360 Ω		
24 V DC			16.7mA	1,440 Ω		

## 2. Specifications

Characteristics	Item	Specifications	
Contact	Arrangement	1 Form C	
	Contact material	Stationary: Gold plating, Movable: Gold clad	
	Initial contact resistance, max.	Max. 100mΩ (By voltage drop 10V AC 10mA)	
Rating	Contact rating	10W (2.5GHz, Impedance 50Ω, V.S.W.R. ≤ 1.2) 10mA 24V DC (resistive load)	
	Contact carrying power	Max. 20W (at 2.5GHz, Impedance 50Ω, V.S.W.R. ≤ 1.2, Average)	
	Max. switching voltage	30V DC	
	Max. switching current	0.5A DC	
	Nominal operating power	Single side stable	200mW
		1 coil latching	200mW
2 coil latching		400mW	
High frequency characteristics (Initial) (~2.5GHz, Impedance 50Ω)	V.S.W.R. (Return loss)	Max. 1.2 (Min. 20.8dB)	
	Insertion loss	Max. 0.2dB	
	Isolation	Min. 60dB	
	Input power	Max. 20W (at 40°C, V.S.W.R. ≤ 1.2, Average)	
Electrical characteristics	Insulation resistance (Initial)		Min. 100MΩ (at 500V DC) Measurement at same location as "Initial breakdown voltage" section.
	Breakdown voltage (Initial)	Between open contacts	500 Vrms for 1min. (Detection current: 10mA)
		Between contact and coil	1,000 Vrms for 1min. (Detection current: 10mA)
		Between contact and earth terminal	500 Vrms for 1min. (Detection current: 10mA)
	Temperature rise (at 20°C)		Max. 60°C (By resistive method, nominal voltage applied to the coil: Contact carrying power: 20W, at 2.5GHz, Impedance 50Ω, V.S.W.R. ≤ 1.2)
	Operate time [Set time] (at 20°C)		Max. 10ms (Approx. 6ms) [Max. 10ms (Approx. 5ms)] (Nominal operating voltage applied to the coil, excluding contact bounce time.)
Release time [Reset time] (at 20°C)		Max. 6ms (Approx. 3ms) [Max. 10ms (Approx. 5ms)] (Nominal operating voltage applied to the coil, excluding contact bounce time.) (without diode)	
Mechanical characteristics	Shock resistance	Functional	Min. 200 m/s <sup>2</sup> {20 G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs.)
		Destructive	Min. 1,000m/s <sup>2</sup> {100 G} (Half-wave pulse of sine wave: 6ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 3mm (Detection time: 10μs.)
		Destructive	10 to 55 Hz at double amplitude of 5mm
Expected life	Mechanical		Min. 5×10 <sup>6</sup> (at 180 cpm)
	Electrical		Min. 10 <sup>5</sup> (10W 2.5 GHz, Impedance 50Ω, V.S.W.R. ≤ 1.2) Min. 3×10 <sup>5</sup> (10mA 24V DC resistive load)
Conditions	Conditions for operation, transport and storage*		Ambient temperature: -40°C to +70°C -40°F to +158°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)
Unit weight			Approx. 5 g .18 oz

Note: \* The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Refer to [6] AMBIENT ENVIRONMENT in GENERAL APPLICATION GUIDELINES.

**REFERENCE DATA**


1. High frequency characteristics

Sample: ARX1012


Measuring method: Measured with HP network analyzer (HP8753C).

The details for the high frequency characteristics and the measurement procedures and conditions are listed in the RX relay test report.


• V.S.W.R. (Return loss)

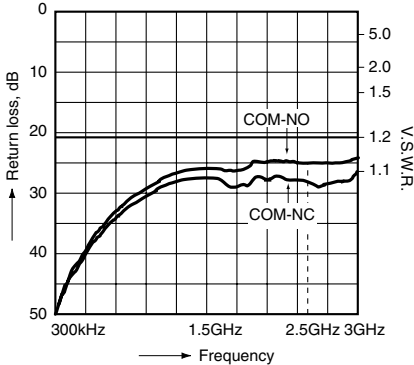

• Insertion loss

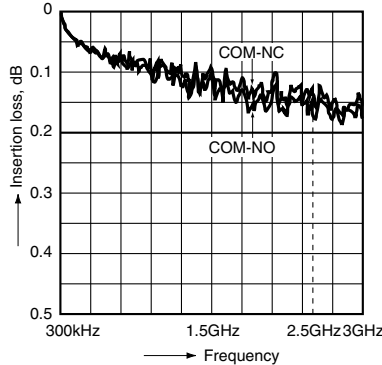




• Isolation

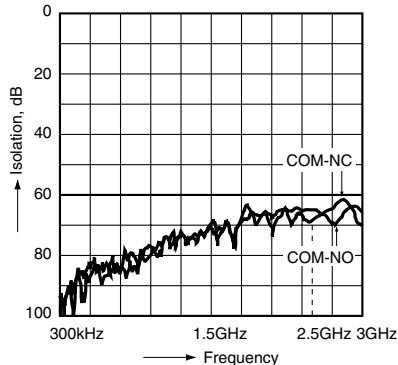

**DIMENSIONS** (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>


**CAD Data**

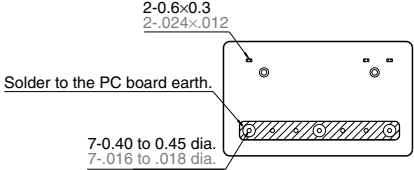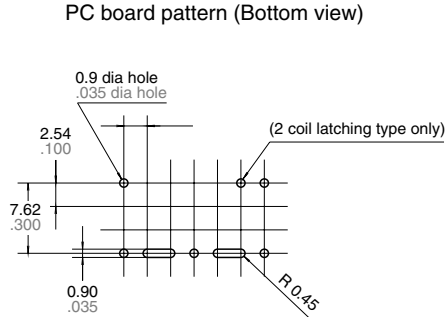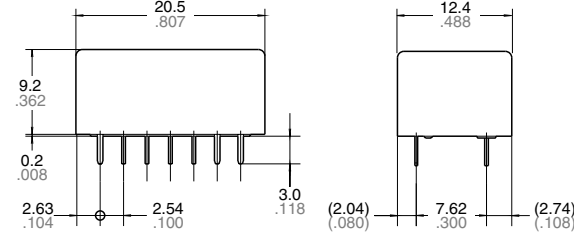

General tolerance:  $\pm 0.3 \pm 0.12$

Tolerance:  $\pm 0.1 \pm 0.04$

Schematic (Bottom view)

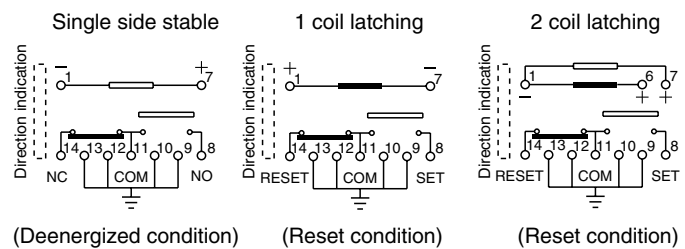

# RX (ARX)

## NOTES

### 1. Coil operating power

Pure DC current should be applied to the coil. The wave form should be rectangular. If it includes ripple, the ripple factor should be less than 5%. However, check it with the actual circuit since the characteristics may be slightly different. The nominal operating voltage should be applied to the coil for more than 30 ms to set/reset the latching type relay.

### 2. Coil connection

When connecting coils, refer to the wiring diagram to prevent mis-operation or malfunction.

### 3. External magnetic field

Since RX relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

### 4. Cleaning

For automatic cleaning, the boiling method is recommended. Avoid ultrasonic cleaning which subjects the relays to high frequency vibrations, which may cause the contacts to stick. It is recommended that a fluorinated hydrocarbon or other alcoholic solvents be used.

### 5. Soldering

The manual soldering shall be performed under following condition.

Max. 260°C 500°F 10s

Max. 350°C 662°F 3s

In addition, when soldering the case to the PC board, the plating may swell depending on the soldering conditions.

### 6. Conditions for operation, transport and storage conditions

1) Ambient temperature, humidity, and atmospheric pressure during usage, transport, and storage of the relay:

(1) Temperature:

−40 to +70°C −40 to +158°F


(2) Humidity: 5 to 85% RH

(Avoid freezing and condensation.)

The humidity range varies with the temperature. Use within the range indicated in the graph below.

(3) Atmospheric pressure: 86 to 106 kPa

Temperature and humidity range for usage, transport, and storage:

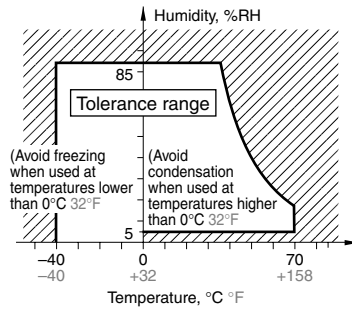

### 2) Condensation

Condensation forms when there is a sudden change in temperature under high temperature and high humidity conditions. Condensation will cause deterioration of the relay insulation.

### 3) Freezing

Condensation or other moisture may freeze on the relay when the temperature is lower than 0°C 32°F. This causes problems such as sticking of movable parts or operational time lags.

4) Low temperature, low humidity environments

The plastic becomes brittle if the relay is exposed to a low temperature, low humidity environment for long periods of time.

### 7. Latching relay

In order to assure proper operating regardless of changes in the ambient usage temperature and usage conditions, nominal operating voltage should be applied to the coil for more than 30 ms to set/reset the latching type relay.

**For general cautions for use, please refer to the “General Application Guidelines”.**