

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

**Panasonic**  
ideas for life

**FLATPACK RELAY**

**NF-RELAYS**



⚠ Product is discontinued.

mm inch

## FEATURES

1. Flatpack
2. Long seller

## SPECIFICATIONS

### Contacts

Arrangement	2 Form C, 4 Form C		
Initial contact resistance (By voltage drop 6 V DC 1 A)	Max.	50 mΩ	
	Typical	25 mΩ	
Contact material	Movable contact	Gold-clad silver	
	Stationary contact	Gold-clad silver	
Rating, (resistive load)	Max. switching power	60 W 100 VA	
	Max. switching voltage	220 V AC, DC	
	Max. switching current	2 A	
Expected life (min. operations)	Mechanical	10 <sup>8</sup>	
	Electrical (Resistive)	2 A 30 V DC	2 × 10 <sup>5</sup>
		1 A 30 V DC	10 <sup>6</sup>
		0.5 A 30 V DC	10 <sup>7</sup>

### Coil

Nominal operating power, at 25°C	2C	Approx. 300 mW
	4C	Approx. 480 mW
Max. operating power for continuous duty	Approx. 1 W at 40°C 104°F	

### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*<sup>1</sup> Measurement at same location as "Initial breakdown voltage" section
- \*<sup>2</sup> Detection current: 10 mA
- \*<sup>3</sup> Excluding contact bounce time
- \*<sup>4</sup> Half-wave pulse of sine wave: 11ms; detection time: 10μs
- \*<sup>5</sup> Half-wave pulse of sine wave: 6ms
- \*<sup>6</sup> Detection time: 10μs
- \*<sup>7</sup> Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT in catalog.

### Characteristics (at 25°C 77°F, 50% R.H. seal level)

Max. operating speed		50 cps
Initial insulation resistance* <sup>1</sup>		1,000 MΩ at 500 V DC
Electrostatic capacitance	Contact/Contact	Approx. 4 pF
	Contact/Coil	Approx. 7 pF
	Contact/Ground	Approx. 6 pF
Initial breakdown voltage* <sup>2</sup>	Between open contacts	750 Vrms
	Between contact sets	1,000 Vrms
	Between live parts and ground	1,000 Vrms
	Between contacts and coil	1,000 Vrms
Operate time* <sup>3</sup> (at nominal voltage)		Max. 15 ms (Approx. 10 ms)
Release time (without diode)* <sup>3</sup> (at nominal voltage)		Max. 10 ms (Approx. 3 ms)
Contact bounce		Approx. 1.5 ms
Shock resistance	Functional* <sup>4</sup>	In de-energized condition Min. 29.4 m/s <sup>2</sup> {3 G} (In contact direction) Min. 98 m/s <sup>2</sup> {10 G} (perpendicular to contact)
		In energized condition Min. 196 m/s <sup>2</sup> {20 G}
	Destructive* <sup>5</sup>	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional* <sup>6</sup>	In de-energized condition 29.4 m/s <sup>2</sup> {3 G}, 10 to 55 Hz at double amplitude of 0.5 mm (in contact direction) 98 m/s <sup>2</sup> {10 G} 10 to 55 Hz at double amplitude of 1.6 mm (perpendicular to contact)
		In energized condition 117.6 m/s <sup>2</sup> {12 G} 10 to 55 Hz at double amplitude of 2 mm
	Destructive	196 m/s <sup>2</sup> {20 G}, 10 to 55 Hz at double amplitude of 3.3 mm
Conditions for operation, transport and storage* <sup>7</sup> (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +65°C -40°F to +149°F
	Humidity	5 to 85%R.H.
Unit weight	2C	Approx. 14 g .49 oz
	4C	Approx. 15.5 g .55 oz

## TYPICAL APPLICATIONS

NF relays are widely acceptable in applications where small size and high sensitivity are required.

Such applications include: Electronic equipment, Household applications,

Alarm systems, Office machines, Communication equipment, Measuring equipment, Remote control systems, General control circuits, Machine tools, Industrial machinery, etc.

# ORDERING INFORMATION



Contact arrangement	Type classification	-	Coil voltage (DC)	Contact material
2: 2 Form C~ 4: 4 Form C	EB: Standard	-	5, 6, 12, 24, 48 V	Nil: Gold-clad silver 1: Gold-cap over silver palladium

- (Notes) 1. For VDE recognized types, add suffix VDE.  
 2. For UL/CSA recognized type, add suffix-A, as NF2EB-12V-A whose ground terminal is cut off.  
 3. Standard packing Carton: 20 pcs.; Case: 200 pcs.

## TYPES AND COIL DATA (at 25°C 77°F)



\*Less than 1,000 Ω: ±10%  
 \*More than 1,000 Ω: ±15%

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Max. allowable voltage, V DC (at 40°C)	Coil resistance, Ω	Nominal operating power, mW	Inductance, H	
							Armature	
							Open	Close
NF2EB-5V	5	4.0	0.5	8.7	90	278	0.071	0.071
NF2EB-6V	6	4.8	0.6	10.5	137	260	0.093	0.094
NF2EB-12V	12	9.6	1.2	21	500	290	0.338	0.344
NF2EB-24V	24	19.2	2.4	42	2,000	290	1.29	1.31
NF2EB-48V	48	38.4	4.8	84	7,000	330	4.12	4.18
NF4EB-5V	5	4.0	0.5	7	53	472	0.029	0.029
NF4EB-6V	6	4.8	0.6	8.5	90	400	0.070	0.071
NF4EB-12V	12	9.6	1.2	17.0	330	440	0.22	0.23
NF4EB-24V	24	19.2	2.4	34	1,200	480	0.77	0.79
NF4EB-48V	48	38.4	4.8	68	4,200	550	2.22	2.25


## DIMENSIONS

mm inch



### 2 Form C

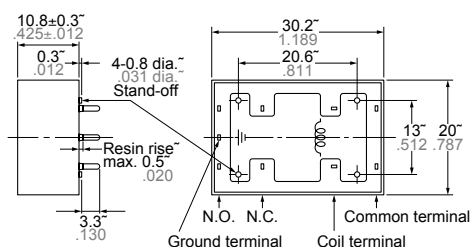


### PC board pattern (Copper-side view)

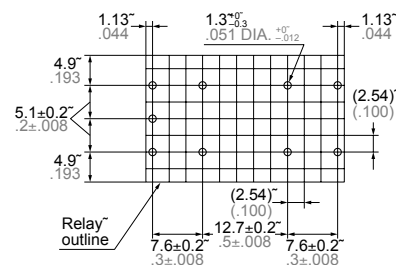

### 4 Form C

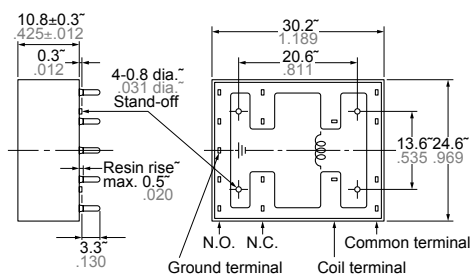


### PC board pattern (Copper-side view)

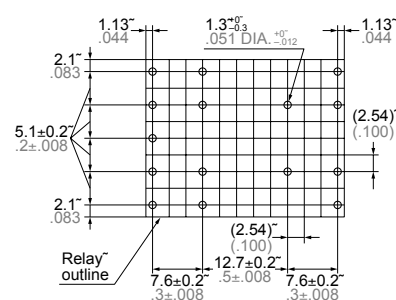


General tolerance: ±0.5 ± 0.20  
 (Except for the cover height)

REFERENCE DATA


1. Life curve

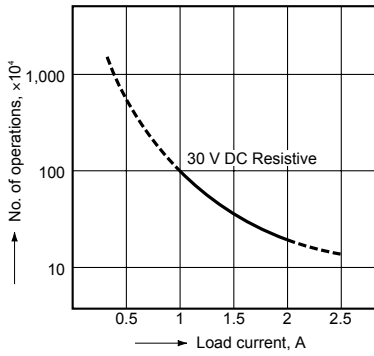

2. Coil temperature rise (resistance method)

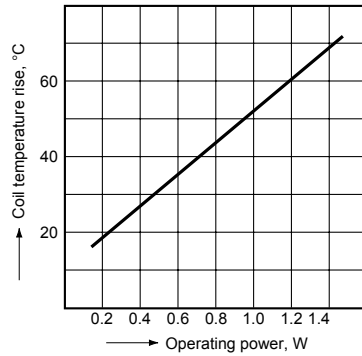


3. H<sub>2</sub>S gas test

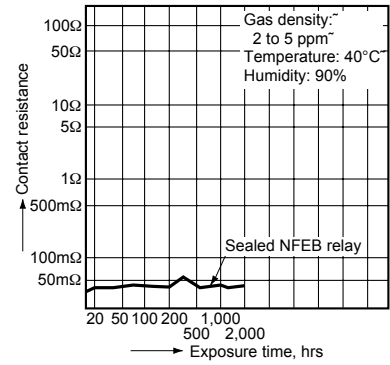

4. Contact reliability

Test conditions:

1. Contact current/voltage: 10 μA 100 mV 1 kHz
2. Cycle rate 20 cps.
3. Miscontact detection level: 1 mW (= 100 Ω)
4. Detection method: Observation of all changeover contacts

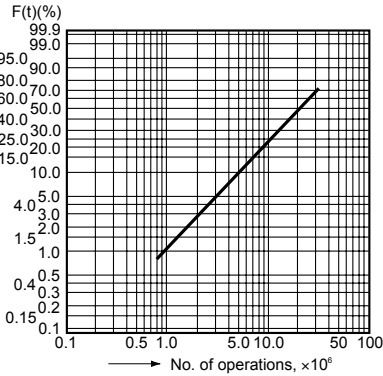

Test result:

- m = 1.5
- μ = 21.2 × 10<sup>6</sup>
- 95% confidence level = 3.1 × 10<sup>6</sup>
- 17 contacts out of 20 achieved 10 million no miscontact operations.

5. High temperature test

Test conditions:


Ambient temperature: 80°C ±2°C

Test method:

1. All contacts were switched for 100 operations on 2 A 30 V DC resistive load.
2. Samples then were exposed to 80°C temperature for 5,000 hours, continuous
3. Contact resistance was measured with Hewlett-Packard testing equipment.

Test result:


Amber relays showed a stable spread of contact resistance within the initially specified 50 mΩ after 5,000 hours exposure.

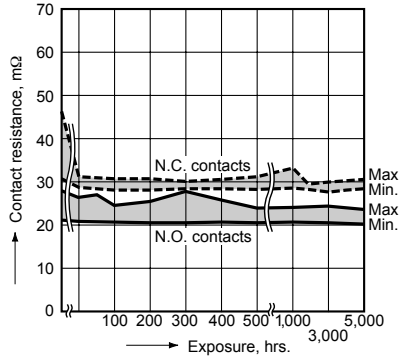

NOTES

1. Prevention of vibration and shock

To reduce the likelihood of vibration and shock, we recommend that you install so that the contact action is not in the direction of gravity.



For Cautions for Use, see Relay Technical Information in catalog.