

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



### FEATURES

- High frequency relay with the low profile of 4 mm .157 inch
- Excellent high frequency characteristics
  - Isolation: Min. 10dB (at 1.8 GHz)
  - Insertion loss: Max. 1.0dB (at 1.8 GHz)
  - V.S.W.R.: Max. 1.3 (at 1.8 GHz)
- High sensitivity in small size  
Size: 10.6 × 9 × 4 mm  
.417 × .354 × .157 inch  
Nominal operating power: 140 mW
- Utilizes tube package for automatic mounting.

5. Self-clinching terminal also available

### TYPICAL APPLICATIONS

- Switching signal of measuring equipment
- All types of compact wireless devices

If you wish to use in applications with low level loads or with high frequency switching, please consult us.

Compliance with RoHS Directive

### ORDERING INFORMATION



Contact arrangement  
1: 1 Form C

Operating function  
Nil: Single side stable

Terminal shape  
Nil: Standard PC board terminal  
H: Self-clinching terminal

Coil voltage, V DC  
1.5, 3, 4.5, 5, 6, 9, 12, 24 V

### TYPES

Contact arrangement	Nominal coil voltage	Standard PC board terminal	
		Single side stable Part No.	Self-clinching terminal Single side stable Part No.
1 Form C	1.5V DC	RP1-1.5V	RP1-H-1.5V
	3 V DC	RP1-3V	RP1-H-3V
	4.5V DC	RP1-4.5V	RP1-H-4.5V
	5 V DC	RP1-5V	RP1-H-5V
	6 V DC	RP1-6V	RP1-H-6V
	9 V DC	RP1-9V	RP1-H-9V
	12 V DC	RP1-12V	RP1-H-12V
	24 V DC	RP1-24V	RP1-H-24V

Standard packing: 50 pcs. in an inner package (tube); 1,000 pcs. in an outer package

### RATING

#### 1. Coil data

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
1.5V DC	75%V or less of nominal voltage* (Initial)	10%V or more of nominal voltage* (Initial)	93.8mA	16 Ω	140mW	150%V of nominal voltage
3 V DC			46.7mA	64.3Ω		
4.5V DC			31.0mA	145 Ω		
5 V DC			28.1mA	178 Ω		
6 V DC			23.3mA	257 Ω		
9 V DC			15.5mA	579 Ω		
12 V DC			11.7mA	1,028 Ω		
24 V DC			11.3mA	2,133 Ω	270mW	120%V of nominal voltage

\*Pulse drive (JIS C5442)

## 2. Specifications

Characteristics	Item	Specifications	
Contact	Arrangement	1 Form C	
	Initial contact resistance, max.	Max. 50mΩ (By voltage drop 6V DC 0.1A)	
	Contact material	Stationary: Ag + Au clad, Movable: AgPd	
Rating	Contact rating	0.1A 30V DC (resistive load); Contact carrying power: 3W (Max. 1.2GHz); 1W (Max. 1.8GHz); Contact switching power: 1W (Max. 1.8GHz)	
	Nominal operating power (single side stable type)	140mW (1.5 to 12V DC), 270mW (24V DC)	
High frequency characteristics (Initial) (Impedance 50Ω)	V.S.W.R.	Max. 1.2 (at 1GHz), Max. 1.3 (at 1.8GHz)	
	Insertion loss (without D.U.T. board's loss)	Max. 0.5dB (at 1GHz), Max. 1dB (at 1.8GHz)	
	Isolation	Min. 15dB (at 1GHz), Min. 10dB (at 1.8GHz)	
Electrical characteristics	Insulation resistance (Initial)	Min. 1,000MΩ (at 500V DC) Measurement at same location as "Initial breakdown voltage" section.	
	Breakdown voltage (Initial)	Between open contacts	750 Vrms for 1min. (Detection current: 10mA)
		Between contact and coil	1,500 Vrms for 1min. (Detection current: 10mA)
	Temperature rise (at 20°C)	Max. 50°C (By resistive method, nominal voltage applied to the coil, contact carrying power: 1W/at 1.8GHz)	
	Operate time (at 20°C)	Max. 3ms (Approx. 1.5ms) (Nominal operating voltage applied to the coil, excluding contact bounce time.)	
Release time (at 20°C)	Max. 2ms (Approx. 1ms) (Nominal operating voltage applied to the coil, excluding contact bounce time.)		
Mechanical characteristics	Shock resistance	Functional	Min. 500 m/s <sup>2</sup> {Approx. 50G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs.)
		Destructive	Min. 1,000 m/s <sup>2</sup> {Approx. 100G} (Half-wave pulse of sine wave: 6ms.)
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 3mm (Detection time: 10μs.)
		Destructive	10 to 55 Hz at double amplitude of 5mm
Expected life	Mechanical	Min. 5×10 <sup>6</sup> (at 180 cpm)	
	Electrical	Min. 10 <sup>5</sup> (0.1A 30V DC resistive load, 1W (at 1.8GHz, V.S.W.R. max. 1.3 at 20 cpm)	
Conditions	Conditions for operation, transport and storage*	Ambient temperature: -40°C to +70°C -40°F to +158°F Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)	
	Max. operating speed (at rated load)	20 cpm (at rated load)	
Unit weight		Approx. 1 g .04 oz	

Note: \* The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Refer to [6] AMBIENT ENVIRONMENT in GENERAL APPLICATION GUIDELINES.


## REFERENCE DATA

### 1. High frequency characteristics

Sample: RP1-6V

Measuring method: Impedance 50Ω

Measuring tool:

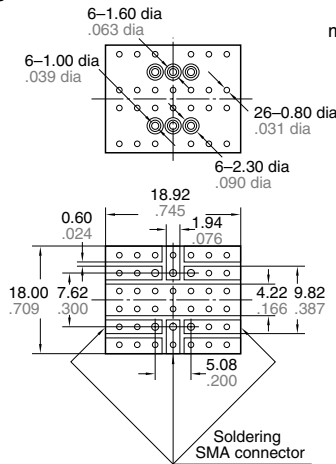


mm inch


PC board

- Double-sided through hole
- Material: Glass-epoxy resin
- t = 1.0mm .039 inch
- Copper plated thickness: 35 μm


#### • V.S.W.R

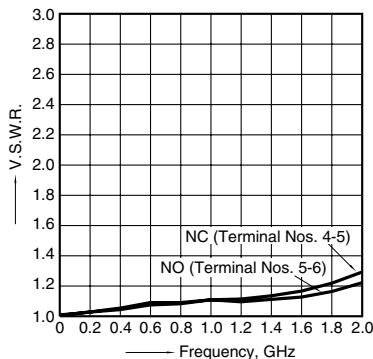

#### • Insertion loss

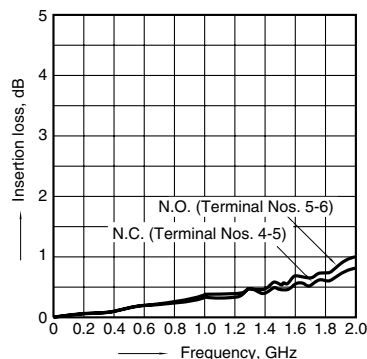


#### • Isolation

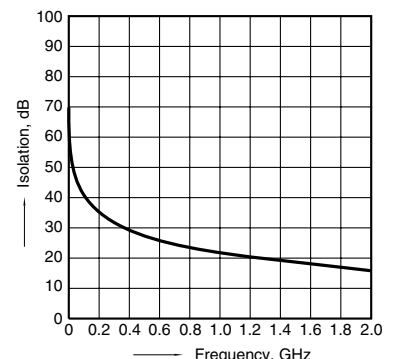

2. Coil temperature rise


Sample: RP1-6V; No. of samples: n = 5  
 Carrying current: 0.1 A  
 Ambient temperature: 25°C 77°F

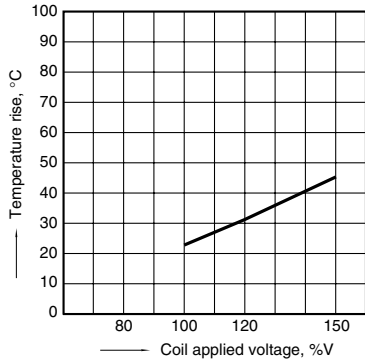


3. Operate/release time

Sample: RP1-9V; No. of samples: n = 50

• With diode

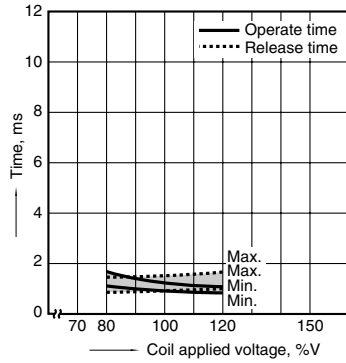


• Without diode

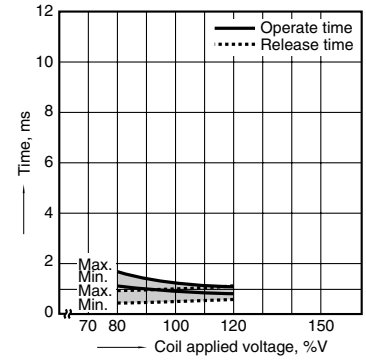

4. Mechanical life

Sample: RP1-5V; No. of samples: n = 8


• Change of pick-up, drop-out voltage

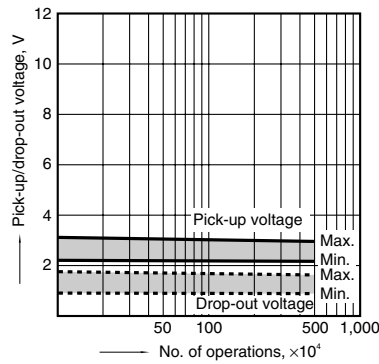


5. Electrical life (0.1 A 30 V DC)

Sample: RP1-6V; No. of samples: n = 6

• Change of pick-up/drop-out voltage

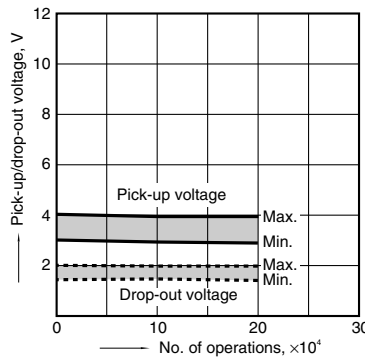


• Change of contact resistance

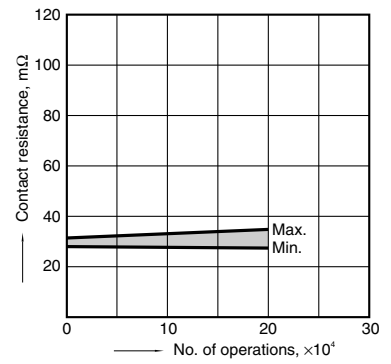


6. Ambient temperature characteristics

Sample: RP1-6V; No. of samples: n = 5




7. Contact resistance distribution (initial)

Sample: RP1-12V; No. of samples: n = 25

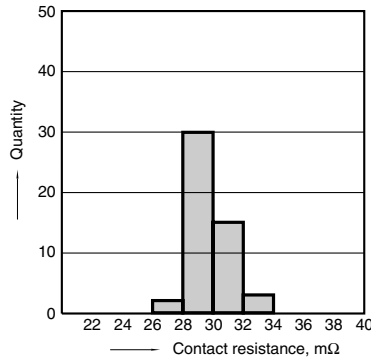


8.-(1) Influence of adjacent mounting

Sample: RP1-12V; No. of samples: n = 6

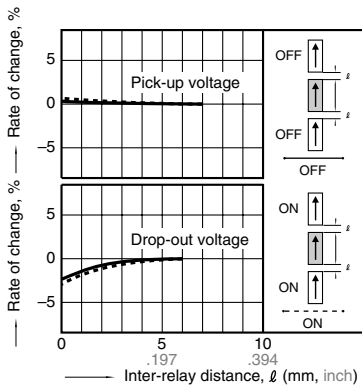


8.-(2) Influence of adjacent mounting

Sample: RP1-12V; No. of samples: n = 6

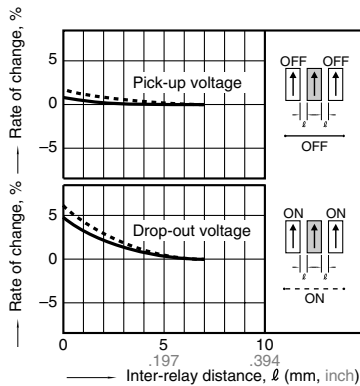

8.-(3) Influence of adjacent mounting


Sample: RP1-12V; No. of samples: n = 6

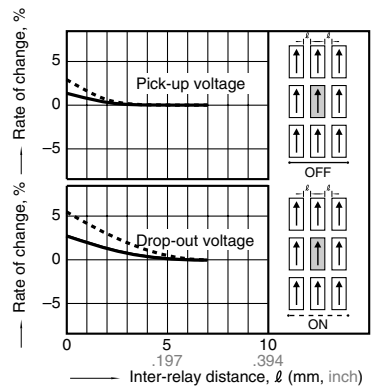


9. High frequency switching test (1.2 GHz, 1 W)

Sample: RP1-6V; No. of samples: n = 6


Ambient temperature: 20°C 68°F

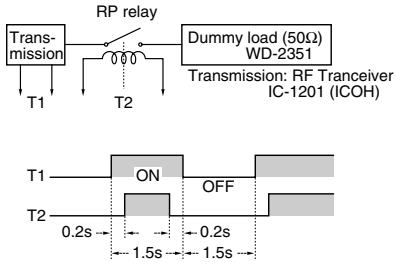

• Change of pick-up/drop-out voltage

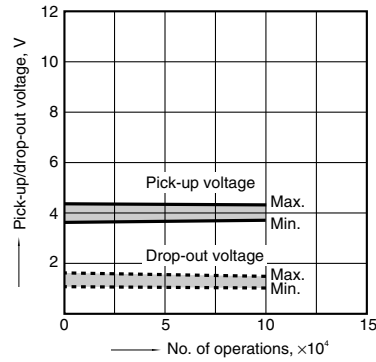

• Change of contact resistance

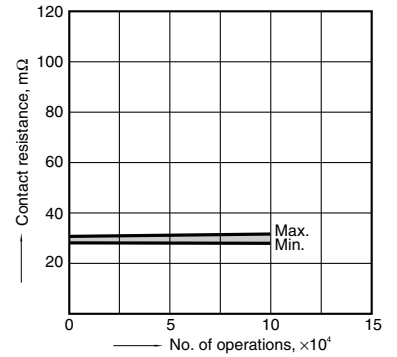



**DIMENSIONS** (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>



**CAD Data**



Standard PC board terminal




Self-clinching terminal




General tolerance:  $\pm 0.3 \pm 0.012$

PC board pattern (Bottom view)



Tolerance:  $\pm 0.1 \pm 0.004$

Schematic (Bottom view)



Deenergized condition

**NOTES**

**1. Coil operating power**

Pure DC current should be applied to the coil. The wave form should be rectangular. If it includes ripple, the ripple factor should be less than 5%. However, check it with the actual circuit since the characteristics may be slightly different. The nominal operating voltage should be applied to the coil for more than 20 ms to set/reset the latching type relay.

**2. Coil connection**


When connecting coils, refer to the wiring diagram to prevent mis-operation or malfunction.

**3. External magnetic field**

Since RP relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

**4. Packing direction**

Relays are packed in a tube with the orientation stripe (PIN NO. 1) toward the green stopper.



**5. Automatic mounting**

To maintain the internal function of the relay, the chucking pressure should not exceed the values below.

Chucking pressure\* in the direction A:


4.9 N {500 gf} or less

Chucking pressure\* in the direction B:


9.8 N {1 kgf} or less

Chucking pressure\* in the direction C:

9.8 N {1 kgf} or less

Please chuck the  portion.

Avoid chucking the center of the relay. In addition, excessive chucking pressure to the pinpoint of the relay should be avoided.

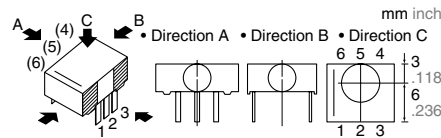

\*Value of chucking pressure is shown by the value of weight pressed on the portion (4 mm .157 inch dia.).

**6. Soldering**

Preheat according to the following conditions.

Temperature	120°C 248°F or less
Time	Within 2 minute

Soldering should be done at 260±5°C 500±9°F within 6 s.

**For general cautions for use, please refer to the “General Application Guidelines”.**