

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

**Normally closed  
DIP6-pin type  
Low on-resistance with  
250V/400V load voltage**

**PhotoMOS Relays**  
**HE 1 Form B**  
 (AQV450, AQV454H)

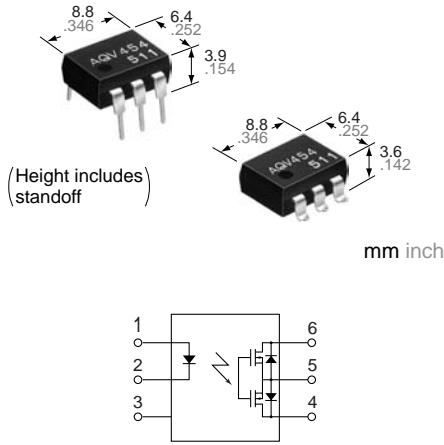


**Compliance with RoHS Directive**

## FEATURES

### 1. 1 Form B (Normally-closed) type with low on-resistance

This has been achieved thanks to the built-in MOSFET processed by our proprietary method, DSD (Double-diffused and Selective Doping) method.

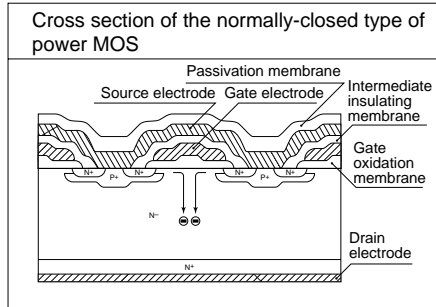

### 2. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 3. High sensitivity and low on-resistance

Can control max. 0.2 A load current with 5 mA input current. Low on-resistance of typ. 5.5 Ω (AQV453).

### 4. Reinforced insulation 5,000 V type also available.

More than 0.4 mm .016 inch internal insulation distance between inputs and outputs. Conforms to IEC950 (reinforced insulation).

## TYPICAL APPLICATIONS

- Security equipment
- High-speed inspection machines
- Measuring instruments
- Telephone equipment
- Sensing equipment

## TYPES

	I/O isolation	Output rating*		Package	Part No.				Packing quantity	
		Load voltage	Load current		Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
						Tape and reel packing style				
					Tube packing style	Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC dual use	1,500 V AC	250 V	200 mA	DIP6-pin	AQV453	AQV453A	AQV453AX	AQV453AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
		400 V	150 mA		AQV454	AQV454A	AQV454AX	AQV454AZ		
	Reinforced 5,000 V AC				AQV454H	AQV454HA	AQV454HAX	AQV454HAZ		

\* Indicate the peak AC and DC values.  
Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the relay.

## RATING

### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item	Symbol	Type of connection	AQV453(A)	AQV454(A)	AQV454H(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA			
	LED reverse voltage	V <sub>R</sub>	5 V			
	Peak forward current	I <sub>FP</sub>	1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW			
Output	Load voltage (peak AC)	V <sub>L</sub>	250 V	400 V		
	Continuous load current	I <sub>L</sub>	A	0.2 A	0.15 A	A connection: Peak AC, DC
			B	0.3 A	0.18 A	B, C connection: DC
			C	0.4 A	0.25 A	
	Peak load current	I <sub>PEAK</sub>	0.6 A	0.5 A		A connection: 100 ms (1 shot), V <sub>L</sub> = DC
Power dissipation	P <sub>OUT</sub>	360 mW				
Total power dissipation	P <sub>T</sub>	410 mW				
I/O isolation voltage	V <sub>iso</sub>		1,500 V AC	5,000 V AC		
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F			

# HE 1 Form B (AQV45○, AQV454H)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV453(A)	AQV454(A)	AQV454H(A)	Remarks	
Input	LED operate (OFF) current	Typical	I <sub>off</sub>	—	1 mA	0.9 mA	1.4 mA	I <sub>L</sub> = Max.
		Maximum			3 mA			
	LED reverse (ON) current	Minimum	I <sub>fon</sub>	—	0.4 mA			I <sub>L</sub> = Max.
Typical		0.9 mA			0.8 mA	1.3 mA		
LED dropout voltage	Typical	V <sub>F</sub>	—	1.25 V (1.14 V at I <sub>F</sub> =5 mA)			I <sub>F</sub> = 50 mA	
	Maximum			1.5 V				
Output	On resistance	Typical	R <sub>on</sub>	A	5.5 Ω	11 Ω		I <sub>F</sub> = 0 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum			8 Ω	16 Ω		
	On resistance	Typical	R <sub>on</sub>	B	2.7 Ω	6.3 Ω		I <sub>F</sub> = 0 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum			4 Ω	8 Ω		
	On resistance	Typical	R <sub>on</sub>	C	1.4 Ω	3.1 Ω		I <sub>F</sub> = 0 mA I <sub>L</sub> = Max. Within 1 s on time
		Maximum			2 Ω	4 Ω		
Off state leakage current	Maximum	I <sub>Leak</sub>	—	1 μA	1 μA	10 μA	I <sub>F</sub> = 5 mA V <sub>L</sub> = Max.	
Transfer characteristics	Operate (OFF) time*	Typical	T <sub>off</sub>	—	1.52 ms	1.2 ms	1.8 ms	I <sub>F</sub> = 0 mA → 5 mA I <sub>L</sub> = Max.
		Maximum			3 ms	2.0 ms	3.0 ms	
	Reverse (ON) time*	Typical	T <sub>on</sub>	—	0.4 ms	0.36 ms	0.4 ms	I <sub>F</sub> = 5 mA → 0 mA I <sub>L</sub> = Max.
		Maximum			1 ms			
I/O capacitance	Typical	C <sub>iso</sub>	—	1.3 pF			f = 1 MHz V <sub>B</sub> = 0 V	
	Maximum			3 pF				
Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	—	1,000 MΩ			500 V DC	

\*Operate/Reverse time

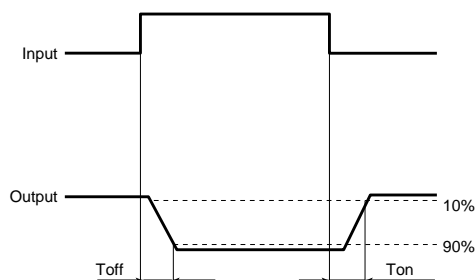

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper relay operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I <sub>F</sub>	Standard type: 5 Reinforced insulation type: 5 to 10	mA

### ■ For Dimensions

### ■ For Schematic and Wiring Diagrams

### ■ For Cautions for Use

### ■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Electric Works technical representative.


For more information

## REFERENCE DATA

### 1. Load current vs. ambient temperature characteristics


Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

Type of connection: A

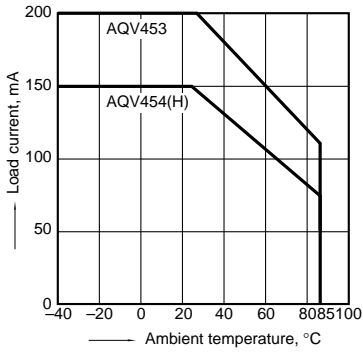


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
 LED current: 0 mA; Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

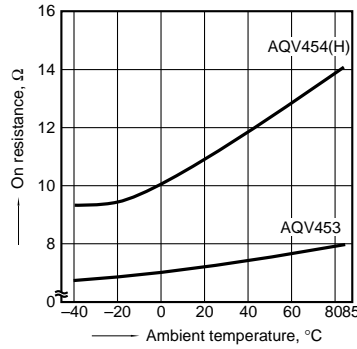


### 3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

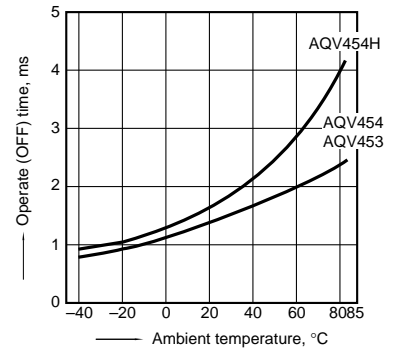


### 4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

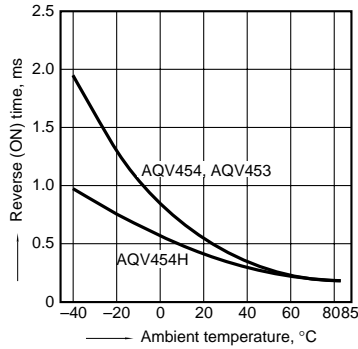


### 5. LED operate (OFF) current vs. ambient temperature characteristics

Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

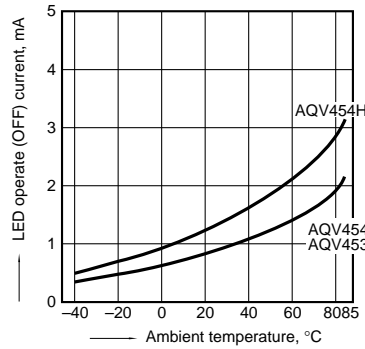


### 6. LED reverse (ON) current vs. ambient temperature characteristics

Load voltage: Max. (DC);  
 Continuous load current: Max. (DC)

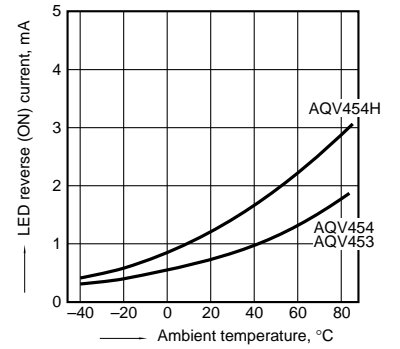


### 7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

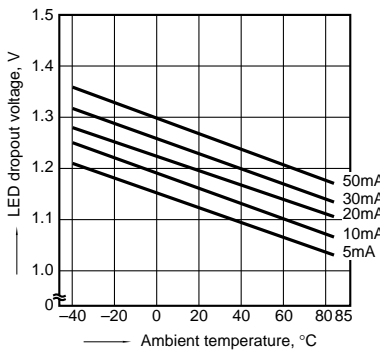


### 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

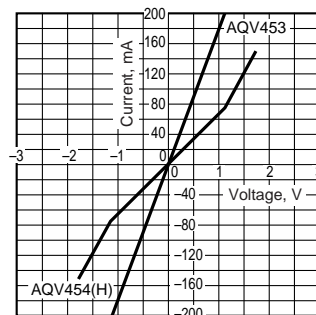


### 9. Off state leakage current vs. load voltage characteristics

Sample: AQV454;  
 Measured portion: between terminals 4 and 6;  
 Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

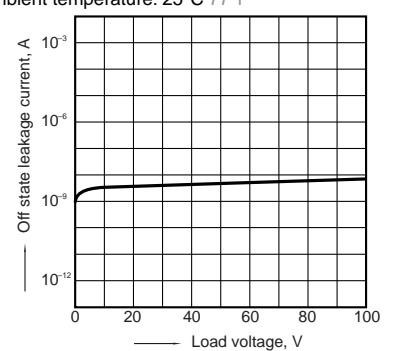


### 10. Operate (OFF) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
 Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

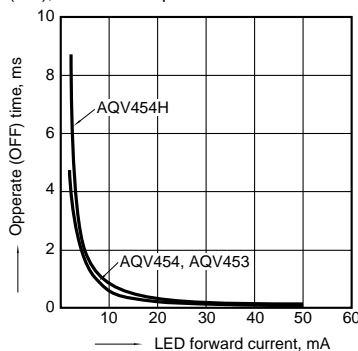

### 11. Reverse (ON) time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;  
 Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

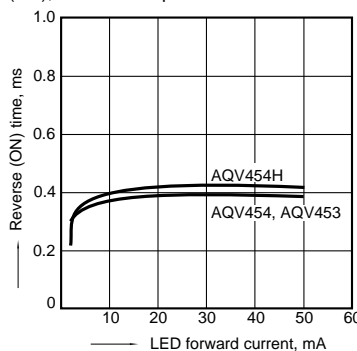

### 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;  
 Frequency: 1 MHz; Ambient temperature:  $25^{\circ}\text{C}$   $77^{\circ}\text{F}$

