

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# EMG 17-OV-TTL/ 24DC/2

Order No.: 2943259




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2943259>

Power optocoupler, with light indicator and protection circuits in the input and output circuits, input: TTL 5 V DC, output: short-circuit resistant, 24 V DC/max. 2 A



## Commercial data

GTIN (EAN)	 4 017918 107543
sales group	G111
Pack	10 pcs.
Customs tariff	85364190
Catalog page information	Page 131 (IF-2009)

## Product notes

WEEE/RoHS-compliant since:  
08/10/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Input data

Nominal input voltage $U_N$	5 V (TTL)
Input voltage range in reference to $U_N$	0.8 ... 1.2
Switching threshold "0" signal, voltage	TTL 0.8 V
Switching threshold "0" signal in reference to $U_N$	TTL (0.8 V)

Switching threshold "1" signal voltage	TTL 2 V
Switching threshold "1" signal in reference to U <sub>N</sub>	TTL (2 V)
Typical input current at U <sub>N</sub>	2.6 mA
Typical response time	170 µs
Typical turn-off time	190 µs
Status display	Yellow LED
Type of protection	Protection against polarity reversal
	Surge protection
	Free running
Protective circuit/component	Polarity protection diode
	Suppressor diode
	Damping diode
Auxiliary voltage TTL input	5 V DC ± 20%
Auxiliary current TTL input	2.8 mA
Transmission frequency	1000 Hz

**Output data**

Output nominal voltage range	10 V DC ... 30 V DC
Limiting continuous current	2 A (see derating curve)
Leakage current	150 µA
Peak offstate voltage	33 V DC (Collector-emitter reverse voltage)
Current limitation at short-circuits	> 2 A (short-circuit resistant)
Voltage drop at max. limiting continuous current	≤ 0.3 V
Output circuit	3-conductor, ground-referenced
Indication	Red LED
Type of protection	Protection against polarity reversal
	Free-wheeling diode
	Surge protection
Protective circuit/component	Polarity protection diode
	Damping diode
	Suppressor diode

**Connection data**

Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

#### General data

Width	17.5 mm
Height	75 mm
Depth	102 mm
Test voltage input/output	2.5 kV
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing
Operating mode	100% operating factor
Degree of protection	IP20
Inflammability class in acc. with UL 94 (housing)	V0
Standards/regulations	IEC 60664
	EN 50178
	IEC 62103
Rated surge voltage / insulation	Basic insulation
Pollution degree	2
Surge voltage category	III

#### Certificates / Approvals




Certification

GOST

## Diagrams/Drawings

### Circuit diagram

---

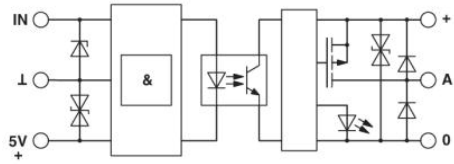

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;