

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。



Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Panasonic
ideas for life

GU (General Use) Type
[1, 2-Channel (Form A)
4, 8-Pin Type]

PhotoMOS
RELAYS



mm inch

FEATURES

1. Low cost type.

2. High sensitivity, Low ON resistance
Can control a maximum 0.5A (AQY282S, AQW282S) load current with a 5mA input current.

Low ON resistance of 2.5Ω (AQY282S, AQW282S).

Stable operation because there are no metallic contact parts.

3. Various package design (DIP4, SOP4, DIP8, SOP8 packages are available)

4. Low-level off state leakage current

The SSR has an off state leakage current of several milliamperes, where as the PhotoMOS relay has only 100pA even with the rated load voltage of 350V (AQY280S, AQW280S).

TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Security equipment
- Sensors
- Amusement

SOP TYPE

SOP 4pin

| Type | Output rating* | | Part No. | | Packing quantity in tape and reel |
|------------|----------------|--------------|------------------------------|------------------------------|-----------------------------------|
| | Load voltage | Load current | Picked from the 1/2-pin side | Picked from the 3/4-pin side | |
| AC/DC type | 60 V | 500 mA | AQY282SX | AQY282SZ | 1,000 pcs. |
| | 350 V | 120 mA | AQY280SX | AQY280SZ | |
| | 400 V | 100 mA | AQY284SX | AQY284SZ | |

*Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard packing style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 100 pcs.; Case: 2,000 pcs.)

(2) For space reasons, the initial letters of the product number "AQY" and "S", the package type indicator "X" and "Z" are omitted from the seal.

SOP 8pin

| Type | Output rating* | | Part No. | | Packing quantity in tape and reel |
|------------|----------------|--------------|----------------------------------|----------------------------------|-----------------------------------|
| | Load voltage | Load current | Picked from the 1/2/3/4-pin side | Picked from the 5/6/7/8-pin side | |
| AC/DC type | 60 V | 350 mA | AQW282SX | AQW282SZ | 1,000 pcs. |
| | 350 V | 100 mA | AQW280SX | AQW280SZ | |
| | 400 V | 80 mA | AQW284SX | AQW284SZ | |

* Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard style. Also available in tube. (Part No. suffix "X" or "Z" is not needed when ordering; Tube: 50 pcs.; Case: 1,000 pcs.)

(2) For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

SOP 4pin

| Item | | Symbol | AQY282S | AQY280S | AQY284S | Remarks |
|-------------------------|-----------------------------------|------------|---------------------------------|---------|---------|-----------------------------------|
| Input | LED forward current | I_F | 50 mA | | | f = 100 Hz, Duty factor = 0.1% |
| | LED reverse voltage | V_R | 5 V | | | |
| | Peak forward current | I_{FP} | 1 A | | | |
| | Power dissipation | P_{in} | 75 mW | | | |
| Output | Load voltage (peak AC) | V_L | 60 V | 350 V | 400 V | 100 ms (1 shot), $V_L = DC$ |
| | Continuous load current (peak AC) | I_L | 0.5 A | 0.12 A | 0.1 A | |
| | Peak load current | I_{peak} | 1.5 A | 0.3 A | 0.24 A | |
| | Power dissipation | P_{out} | 300 mW | | | |
| Total power dissipation | | P_T | 350 mW | | | |
| I/O isolation voltage | | V_{iso} | 1,500 V AC | | | |
| Operating temperature | | T_{opr} | -40°C to +85°C -40°F to +185°F | | | Non-condensing at low temperature |
| Storage temperature | | T_{stg} | -40°C to +100°C -40°F to +212°F | | | |

SOP 8pin

| Item | | Symbol | AQW282S | AQW280S | AQW284S | Remarks |
|-------------------------|-----------------------------------|------------|---------------------------------|--------------|--------------|--|
| Input | LED forward current | I_F | 50 mA | | | f = 100 Hz, Duty factor = 0.1% |
| | LED reverse voltage | V_R | 5 V | | | |
| | Peak forward current | I_{FP} | 1 A | | | |
| | Power dissipation | P_{in} | 75 mW | | | |
| Output | Load voltage (peak AC) | V_L | 60 V | 350 V | 400 V | (): in case of using only 1 channel 100 ms (1 shot), $V_L = DC$ |
| | Continuous load current (peak AC) | I_L | 0.35 (0.5) A | 0.1 (0.13) A | 0.08 (0.1) A | |
| | Peak load current | I_{peak} | 1.05 A | 0.3 A | 0.24 A | |
| | Power dissipation | P_{out} | 600 mW | | | |
| Total power dissipation | | P_T | 650 mW | | | |
| I/O isolation voltage | | V_{iso} | 1,500 V AC | | | |
| Operating temperature | | T_{opr} | -40°C to +85°C -40°F to +185°F | | | Non-condensing at low temperature |
| Storage temperature | | T_{stg} | -40°C to +100°C -40°F to +212°F | | | |

2. Electrical characteristics (Ambient temperature: 25°C 77°F)


SOP 4pin

| Item | | Symbol | AQY282S | AQY280S | AQY284S | Condition |
|--------------------------|----------------------------------|----------------------------------|----------|---------|--------------|--|
| Input | LED operate current | Typical | 1.8 mA | | | $I_L = Max.$ |
| | | Maximum | 3.0 mA | | | |
| | LED turn off current | Minimum | 0.2 mA | | | $I_L = Max.$ |
| | | Typical | 1.6 mA | | | |
| LED dropout voltage | Typical | 1.14 V (1.25 V at $I_F = 50mA$) | | | $I_F = 5 mA$ | |
| | Maximum | 1.5 V | | | | |
| Output | On resistance | Typical | 0.85Ω | 20Ω | 28Ω | $I_F = 5 mA$ $I_L = Max.$ Within 1 s on time |
| | | Maximum | 2.5Ω | 25Ω | 35Ω | |
| | Off state leakage current | Maximum | 1μA | | | $I_F = 0 mA$ $V_L = Max.$ |
| Transfer characteristics | Turn on time* | Typical | 0.9 ms | 0.3 ms | | $I_F = 5 mA$ $I_L = Max.$ |
| | | Maximum | 3 ms | | | |
| | Turn off time* | Typical | 0.5 ms | | | $I_F = 5 mA$ $I_L = Max.$ |
| | | Maximum | 2 ms | | | |
| | I/O capacitance | Typical | 0.8 pF | | | f = 1 MHz $V_B = 0V$ |
| Maximum | | 1.5 pF | | | | |
| | Initial I/O isolation resistance | Minimum | 1,000 MΩ | | | 500 V DC |

SOP 8pin

| Item | | Symbol | AQW282S | AQW280S | AQW284S | Condition |
|----------------------------------|---------------------------|--|---------|---------|-----------------------|--|
| Input | LED operate current | Typical | 1.8 mA | | | I _L = Max. |
| | | Maximum | 3.0 mA | | | |
| | LED turn off current | Minimum | 0.2 mA | | | I _L = Max. |
| | | Typical | 1.6 mA | | | |
| LED dropout voltage | Typical | 1.14 V (1.25 V at I _F = 50mA) | | | I _F = 5 mA | |
| | Maximum | 1.5 V | | | | |
| Output | On resistance | Typical | 0.85Ω | 20Ω | 28Ω | I _F = 5 mA I _L = Max. Within 1 s on time |
| | | Maximum | 2.5Ω | 25Ω | 35Ω | |
| | Off state leakage current | Maximum | 1μA | | | I _F = 0 mA V _L = Max. |
| Transfer characteristics | Turn on time* | Typical | 0.9 ms | 0.3 ms | | I _F = 5 mA I _L = Max. |
| | | Maximum | 3 ms | | | |
| | Turn off time* | Typical | 0.5 ms | | | I _F = 5 mA I _L = Max. |
| | | Maximum | 2 ms | | | |
| | I/O capacitance | Typical | 0.8 pF | | | f = 1 MHz V _B = 0V |
| | | Maximum | 1.5 pF | | | |
| Initial I/O isolation resistance | Minimum | 1,000 MΩ | | | 500 V DC | |

*Turn on/Turn off time

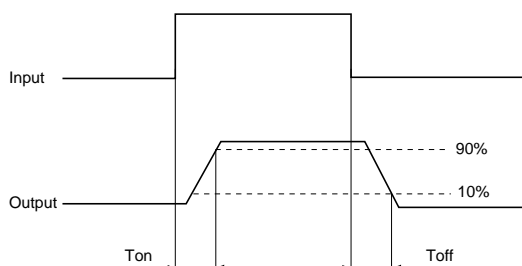

3-4 the terminal leads receive solder plating or solder dip plating.

REFERENCE DATA


[SOP type]

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

Type of connection: A


(1) AQY282S

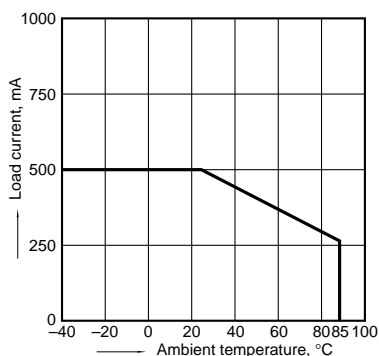

(2) AQY280S, AQY284S

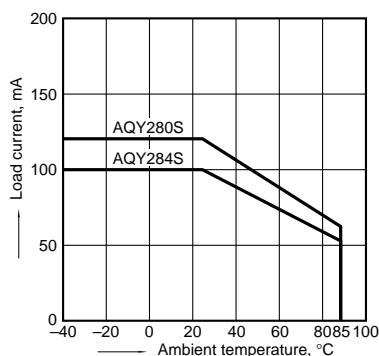


(3) AQW282S

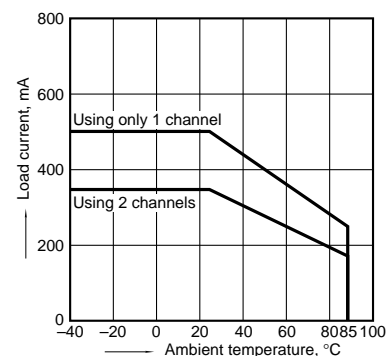


DIMENSIONS

AQY28○S




Recommended mounting pad (Top view)




Terminal thickness = 0.15 .006
General tolerance: ±0.1 ±.004

Tolerance: ±0.1 ±.004

AQW28○S

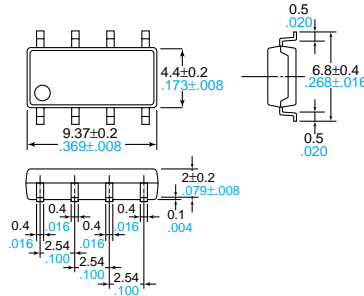

Recommended mounting pad (Top view)



Terminal thickness = 0.15 .006
General tolerance: ±0.1 ±.004






Tolerance: ±0.1 ±.004

AQY28○EH(A)


Through hole terminal type

Surface mount terminal type

PC board pattern (Bottom view)

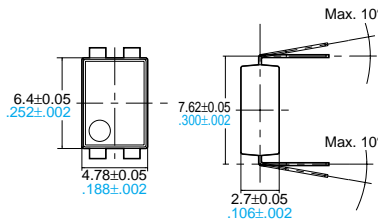

Mounting pad (Top view)



Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004

Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004






Tolerance: ±0.1 ±.004

AQW28○EH(A)


Through hole terminal type

Surface mount terminal type

PC board pattern (Bottom view)

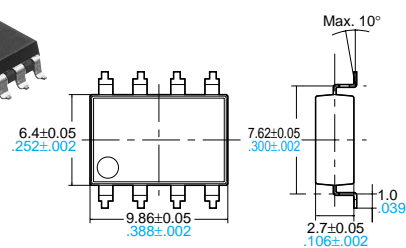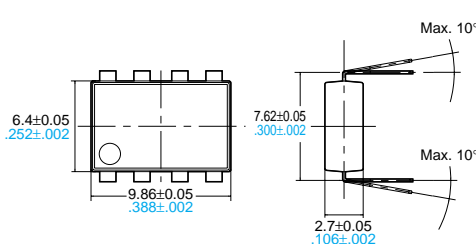

Mounting pad (Top view)



Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004

Terminal thickness = 0.2 .008
General tolerance: ±0.1 ±.004

Tolerance: ±0.1 ±.004