

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

NAIS

HE (High-function Economy)
Type
[1-Channel (Form A) Type]
—Soft-ON/OFF Operation—

PhotoMOS RELAYS

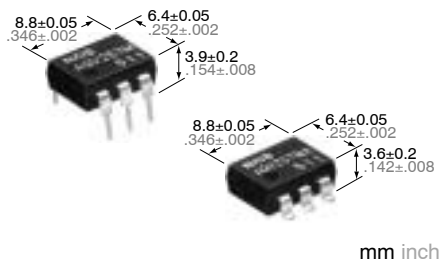

FEATURES

- 1. Reducing switching-noise**
Smooth switching realized by Soft-ON/OFF operation.
- 2. Reducing inrush current generated in the circuit by Soft-ON operating function**
- 3. Reducing counter electromotive force by Soft-OFF operating function**
- 4. Controls low-level analog signals**

TYPICAL APPLICATIONS

- OCU (Official Channel Unit) line switching
- Need to eliminate inrush and counter electromotive force

TYPES

	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal				
	Load voltage	Load current	Tube packing style	Tape and reel packing style		Tube	Tape and reel	
Picked from the 1/2/3-pin side				Picked from the 4/5/6-pin side				
AC/DC type	200 V	250 mA	AQV257M	AQV257MA	AQV257MAX	AQV257MAZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV257M(A)	Remarks	
Input	LED forward current	I_F	/	50 mA		
	LED reverse voltage	V_R		3 V		
	Peak forward current	I_{FP}		1 A	$f = 100 \text{ Hz}$, Duty factor = 0.1%	
	Power dissipation	P_{in}		75 mW		
Output	Load voltage (peak AC)	V_L	/	200 V		
	Continuous load current	I_L		A	0.25 A	A connection: Peak AC, DC B, C connection: DC
				B	0.35 A	
				C	0.5 A	
	Peak load current	I_{peak}			0.75 A	A connection: 100 ms (1 shot), $V_L = \text{DC}$
Power dissipation	P_{out}		360 mW			
Total power dissipation		P_T		410 mW		
I/O isolation voltage		V_{iso}		1,500 V AC		
Temperature limits	Operating	T_{opr}		-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures	
	Storage	T_{stg}		-40°C to +100°C -40°F to +212°F		

AQV257M

2. Electrical characteristics (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV257M(A)	Condition	
Input	LED operate current	Typical	I _{Fon}	—	0.6 mA	
		Maximum			2.0 mA	
	LED turn off current	Minimum	I _{Foff}	—	0.2 mA	
		Typical			0.5 mA	
LED dropout voltage	Typical	V _F	—	1.14 V**		
	Maximum			1.5 V		
Output	On resistance	Typical	R _{on}	A	2.6 Ω	
		Maximum			4 Ω	
		Typical	R _{on}	B	1.4 Ω	
		Maximum			2 Ω	
	Typical	R _{on}	C	0.7 Ω		
	Maximum			1 Ω		
Off state leakage current		Maximum	I _{Leak}	—	1 μA	
Transfer characteristics	Switching speed	Turn on time*	Typical	T _{on}	—	5.1 ms
			Maximum			15.0 ms
		Rise time*	Minimum	T _r	—	1.0 ms
			Typical			2.2 ms
		Turn off time*	Typical	T _{off}	—	3.2 ms
			Maximum			10.0 ms
	Fall time*	Minimum	T _f	—	0.6 ms	
		Typical			1.3 ms	
	I/O capacitance		Typical	C _{iso}	—	0.8 pF
			Maximum			1.5 pF
Initial I/O isolation resistance		Minimum	R _{iso}	—	1,000 MΩ	

Note: Recommendable LED forward current I_F = 5 mA.

**1.25 V at I_F = 50 mA

For type of connection, see Page 444.

* Turn on (T_{on})/Turn off (T_{off}) time
Rise (T_r)/Fall (T_f) time

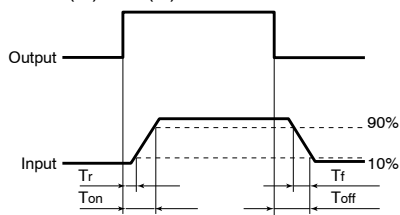


- For Dimensions, see Page 440.
- For Schematic and Wiring Diagrams, see Page 444.
- For Cautions for Use, see Page 449.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$;

Type of connection: A

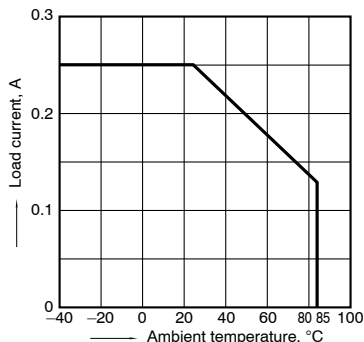


2. On resistance vs. ambient temperature characteristics

Sample: AQV257M; Measured portion: between terminals 4 and 6;
 LED current: 5 mA; LED current: 5 mA;
 Continuous load current: 250 mA (DC)

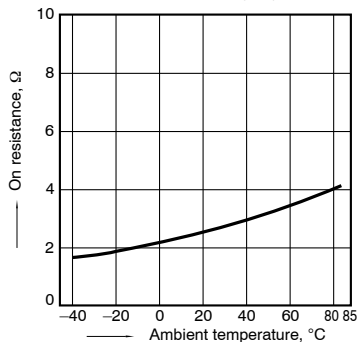


3. Turn on time vs. ambient temperature characteristics

Sample: AQV257M;
 LED current: 5 mA; Load voltage: 200 V (DC);
 Continuous load current: 250 mA (DC)

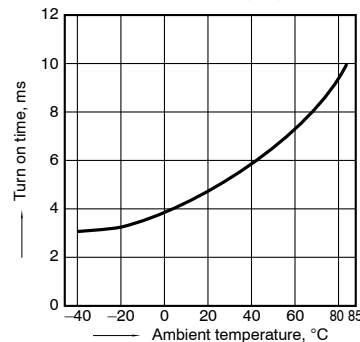


4. Rise time vs. ambient temperature characteristics

Sample: AQV257M;
 LED current: 5 mA; Load voltage: 200 V (DC);
 Continuous load current: 250 mA (DC)

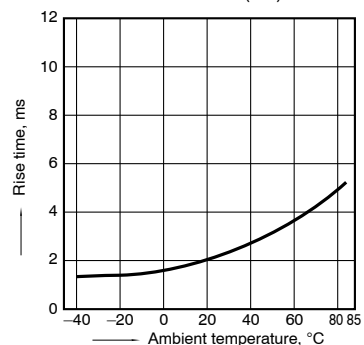


5. Turn off time vs. ambient temperature characteristics

Sample: AQV257M;
 LED current: 5 mA; Load voltage: 200 V (DC);
 Continuous load current: 250 mA (DC)

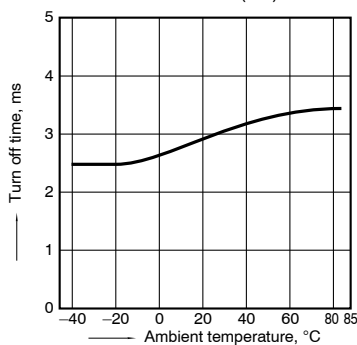


6. Fall time vs. ambient temperature characteristics

Sample: AQV257M;
 LED current: 5 mA; Load voltage: 200 V (DC);
 Continuous load current: 250 mA (DC)

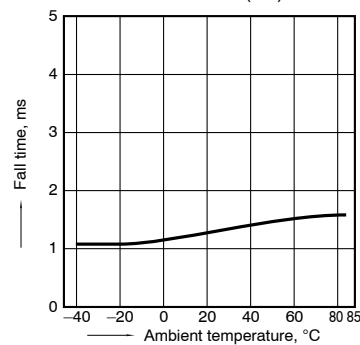


7. LED operate current vs. ambient temperature characteristics

Sample: AQV257M; Load voltage: 200 V (DC);
 Continuous load current: 250 mA (DC)

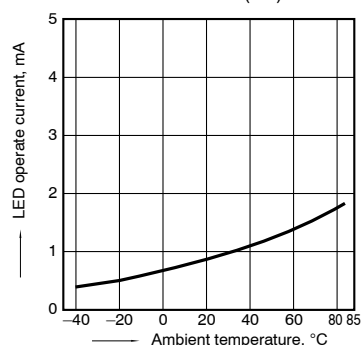


8. LED turn off current vs. ambient temperature characteristics

Sample: AQV257M; Load voltage: 200 V (DC);
 Continuous load current: 250 mA (DC)

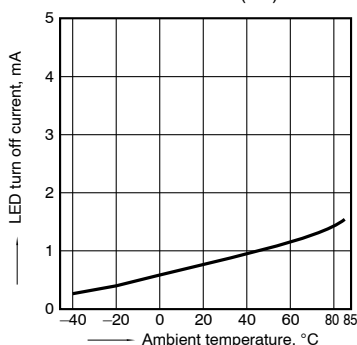


9. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

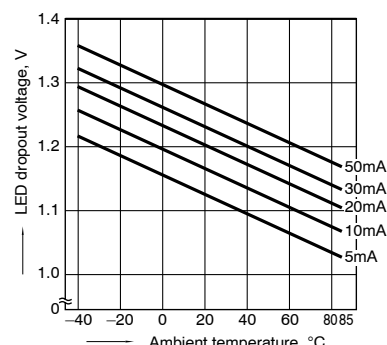


10. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F




11. Off state leakage current

Sample: AQV257M;
 Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

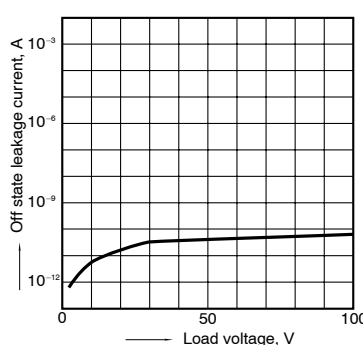

12. LED forward current vs. turn off time characteristics


Sample: AQV257M; Measured portion: between terminals 4 and 6; Load voltage: 200 V (DC);
 Continuous load current: 250 mA (DC); Ambient temperature: 25°C 77°F

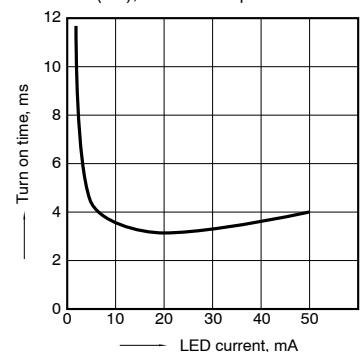

AQV257M


13. LED current vs. rise time characteristics

Sample: AQV257M;
Measured portion: between terminals 4 and 6;
Load voltage: 200 V (DC);
Continuous load current: 250 mA (DC);
Ambient temperature: 25°C 77°F




14. LED forward current vs. turn off time characteristics

Sample: AQV257M;
Measured portion: between terminals 4 and 6;
Load voltage: 200 V (DC);
Continuous load current: 250 mA (DC);
Ambient temperature: 25°C 77°F

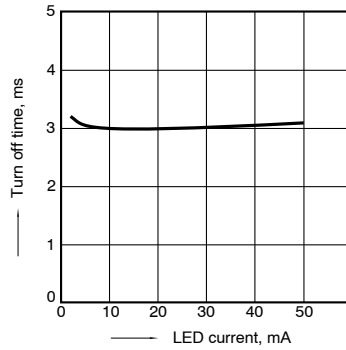

15. LED current vs. fall time characteristics

Sample: AQV257M;
Measured portion: between terminals 4 and 6;
Load voltage: 200 V (DC);
Continuous load current: 250 mA (DC);
Ambient temperature: 25°C 77°F

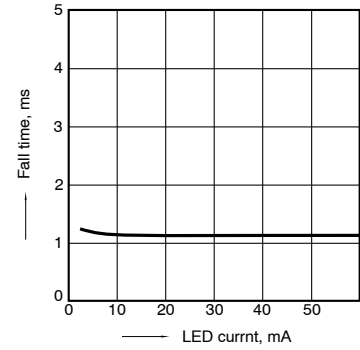

16. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

