

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

CCX SERIES



- ▶ Back to back dual SCR output
- ▶ Ratings up to 5 amps at 660Vac
- ▶ Zero-crossing (resistive loads) or random-fire (inductive loads) output
- ▶ Pinout compatible with standard 0.6" I/O Modules
- ▶ UL, CSA, & VDE approved, CE Compliant



Output Specifications

Voltage range (Vrms)	12-280Vac	48-660Vac
Peak voltage (Vpk, t = 1 min.)	600	1200
Off-state leakage mArms (@ max. line voltage & Ta = 25°C)	0.1	0.1
Output current (Arms) (see derate curve)	5	5
Minimum current (mArms)	60	60
Max. 1 cycle surge current (Apk, Ta = 25°C)	250	250
I ² T (60Hz, ½ cycle)	260	260
Max. forward voltage drop (Vpk @ Imax, Ta = 25°C)	1.4	1.4
Static off-state dv/dt (V/µs, Ta = 25°C)	500	500
Power factor (min.) with max load	0.5	0.5

Input Specifications

Input voltage	3-15Vdc	4-15Vdc
Drop out voltage	1Vdc	1Vdc
Typical input current (@5Vdc)	15 mAdc	15 mAdc
Nominal Input Resistance (Ohms)	300	240
Max. Turn-on time*	1/2 Cycle	
Max. Turn-off time	1/2 Cycle	

* Random SSR's turn on in less than 100µs

General Characteristics

Operating Temperature (°C)	-30 to + 80
Storage Temperature (°C)	-30 to + 125
Input to output isolation	4000Vrms
Input to output capacitance	10pF (typical)
Operating Frequency	47 to 63 Hz
Encapsulation	Thermally Conductive Epoxy
Weight (typical)	0.4 oz. (11g)

Standards of Compliance

CE Compliant with the LVD 73/23/EEC
 UL Recognized
 CSA Certified
 VDE Approved


Part Numbers

Zero-Crossing Output (resistive loads)


Rating	Output	Input	Part Number
5 Amp	12-280Vac	3-15VDC	CCX240D5
5 Amp	48-660Vac	4-15VDC	CCX480D5

Random Fire Output (inductive loads)

Rating	Output	Input	Part Number
5 Amp	12-280Vac	3-15VDC	CCX240D5R
5 Amp	48-660Vac	4-15VDC	CCX480D5R

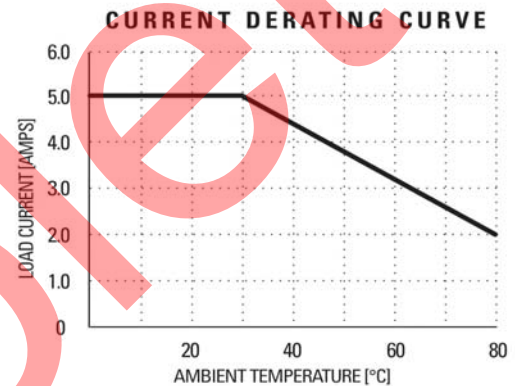

Max. Load Current vs. Temp.

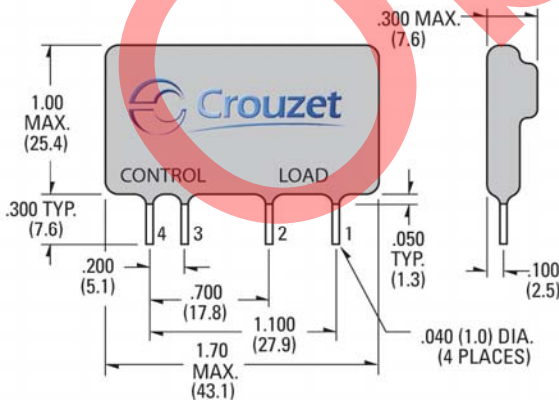

PIN 1: AC LOAD
 PIN 2: AC LOAD
 PIN 3: +DC CONTROL
 PIN 4: -DC CONTROL

All dimensions are in inches (millimeters)