

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .


Address:
BLOCK 1, DEHUINA INDUSTRIAL DISTRICT,
MINGZHI RD LONGHUA, SHENZHEN,
GUANGDONG, CHINA 518131


TEL: (86) 755-8192552 8190943
FAX: (86) 755-8192557
E-mail: szwwiner@public.szptt.net.cn
HOME PAGE: www.globalsources.com/hornmic.co

CUSTOMER: Digi-Key Corporation


APPROVE SHEET

PRODUCT NAME	TYPE	DIMENSION	
Electret Condensér Microphone	EM9752N-51	Ø9.7×5.2(mm)	

APPROVED :  DATE: 2000.11.25

CHECKED BY:  DATE: 2000.11.25

ISSUED BY: 陳為波 DATE: 2000/11/22



APPROVED BY

DATE:

Address:
BLOCK 1, DEHUINA INDUSTRIAL DISTRICT,
MINGZHI RD LONGHUA, SHENZHEN,
GUANGDONG, CHINA 518131


TEL: (86) 755-8192552 8190943
FAX: (86) 755-8192557
E-mail: szwwiner @ public.szptt.net.cn
HOME PAGE: www.globalsources.com/hornmic.co

SPECIFICATION

Item	Symbol	Test conditions	Min	Standard	Max	Unit
Sensitivity	S	f=1KHz. Pin=1pa	-55	-51	-47	dB 0dB=1V/pa
Directivity	Noise canceling					
Impedance	Zout				680	Ω
Current consumption	I	f=1KHz. Pin=1pa			500	μ A
Sensitivity reduction	Δ S	f=1KHz. Pin=1pa. $V_s=1.5 \rightarrow 1V$			-3	dB
S/N ratio	S/N(A)	f=1KHz. Pin=1pa. A=curve	58			dB

Measurement Circuit (Test Condition $V_s=1.5V$ $R_L=680\Omega$)

$T_a=20^\circ C$ R.H=65%)

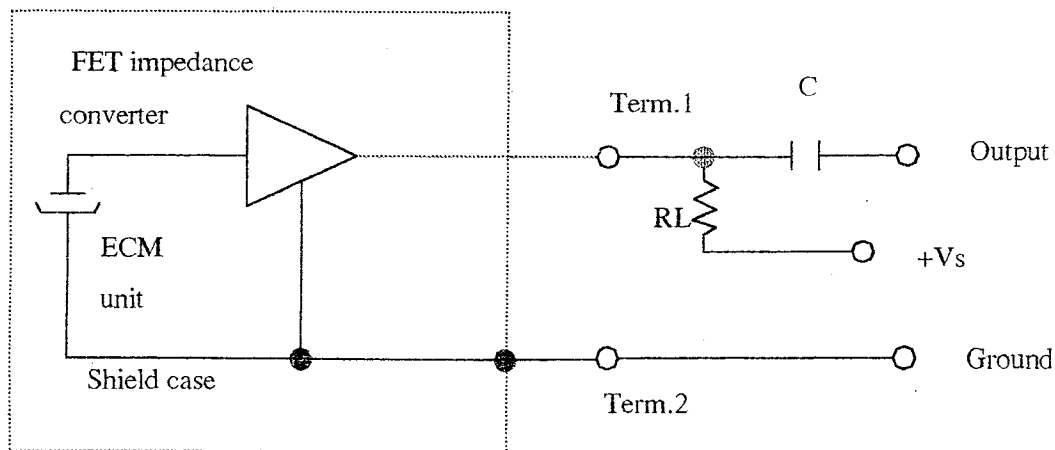


Address:
BLOCK 1, DEHUINA INDUSTRIAL DISTRICT,
MINGZHI RD LONGHUA, SHENZHEN,
GUANGDONG, CHINA 518131

TEL: (86) 755-8192552 8190943
FAX: (86) 755-8192557
E-mail: szwwiner@public.szptt.net.cn
HOME PAGE: www.globalsources.com/hornmic.co


Dimensional Drawing

unit: mm

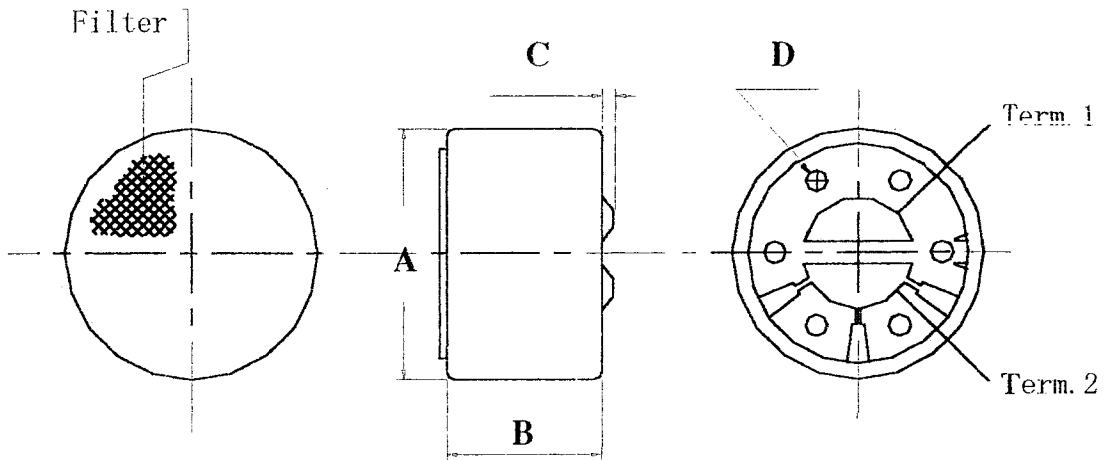

PART	MIN	TYPE	MAX	REMARK
A	Ø9.6	Ø9.7	Ø9.8	
B	5.0	5.2	5.4	
C	-	-	0.7	
D	Ø0.8	-	Ø1.2	

Typical Frequency Response Curve

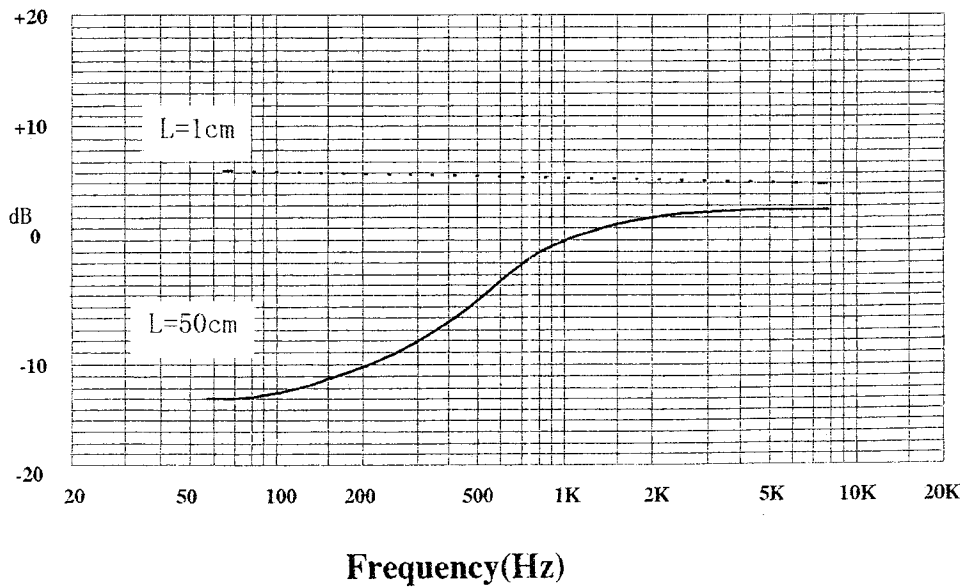

Address:
BLOCK 1, DEHUINA INDUSTRIAL DISTRICT,
MINGZHI RD LONGHUA, SHENZHEN,
GUANGDONG, CHINA 518131

TEL: (86) 755-8192552 8190943
FAX: (86) 755-8192557
E-mail: szwwiner@public.szptt.net.cn
HOME PAGE: www.globalsources.com/hornmic.co

Ambient condition

(1) Operating condition

Ambient temperature: $-10^{\circ}\text{C} \sim +45^{\circ}\text{C}$

Relative humidity: $\leq 85\%$

(2) Storage condition

Ambient temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Relative humidity: 45%

Reliability Test

1) Vibration Test

To be no interference in operation after vibration of full amplitude 2mm for 30 minutes at three axis, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

2) Drop test

To be no interference in operation after dropped to concrete floor each time from 1 meter height of three directions in state of packing, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

3) High Temperature Storage:

To be no interference in operation after high temperature test $70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 48 hours. The sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

4) Isotherm & Iso-humidity Storage

To be no interference in operation after storage test at temperature $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and relative humidity ($93\% \pm 2\sim 3\%$) for 48 hours, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity, the test is performed at temperature 20°C after operation for 2 hours.

5) Low Temperature Storage

To be no interference in operation after test at temperature $-20^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 4 hours, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity

6) Temperature Cycle Test

After exposure at $55 \pm 2^{\circ}\text{C}$ for 1 hour, at $20 \pm 2^{\circ}\text{C}$ for 1 hour, at $-10 \pm 2^{\circ}\text{C}$ for 1 hour, at $20 \pm 2^{\circ}\text{C}$ for 1 hour, with 5 cycles. Change of sensitivity within $\pm 3\text{dB}$ from initial measuring should be done after 2 hours exposed to $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$.


7) Collision Test

After collided with the acceleration $100 \pm 10\text{m/s}$, at the vertical & horizontal directions for 1000 ± 10 times. at the state of packing. Change of sensitivity within $\pm 3\text{dB}$ from initial.

HORN Shenzhen Horn Industrial Co., Ltd.

Explanation of Part Number

Explanation of Part Number

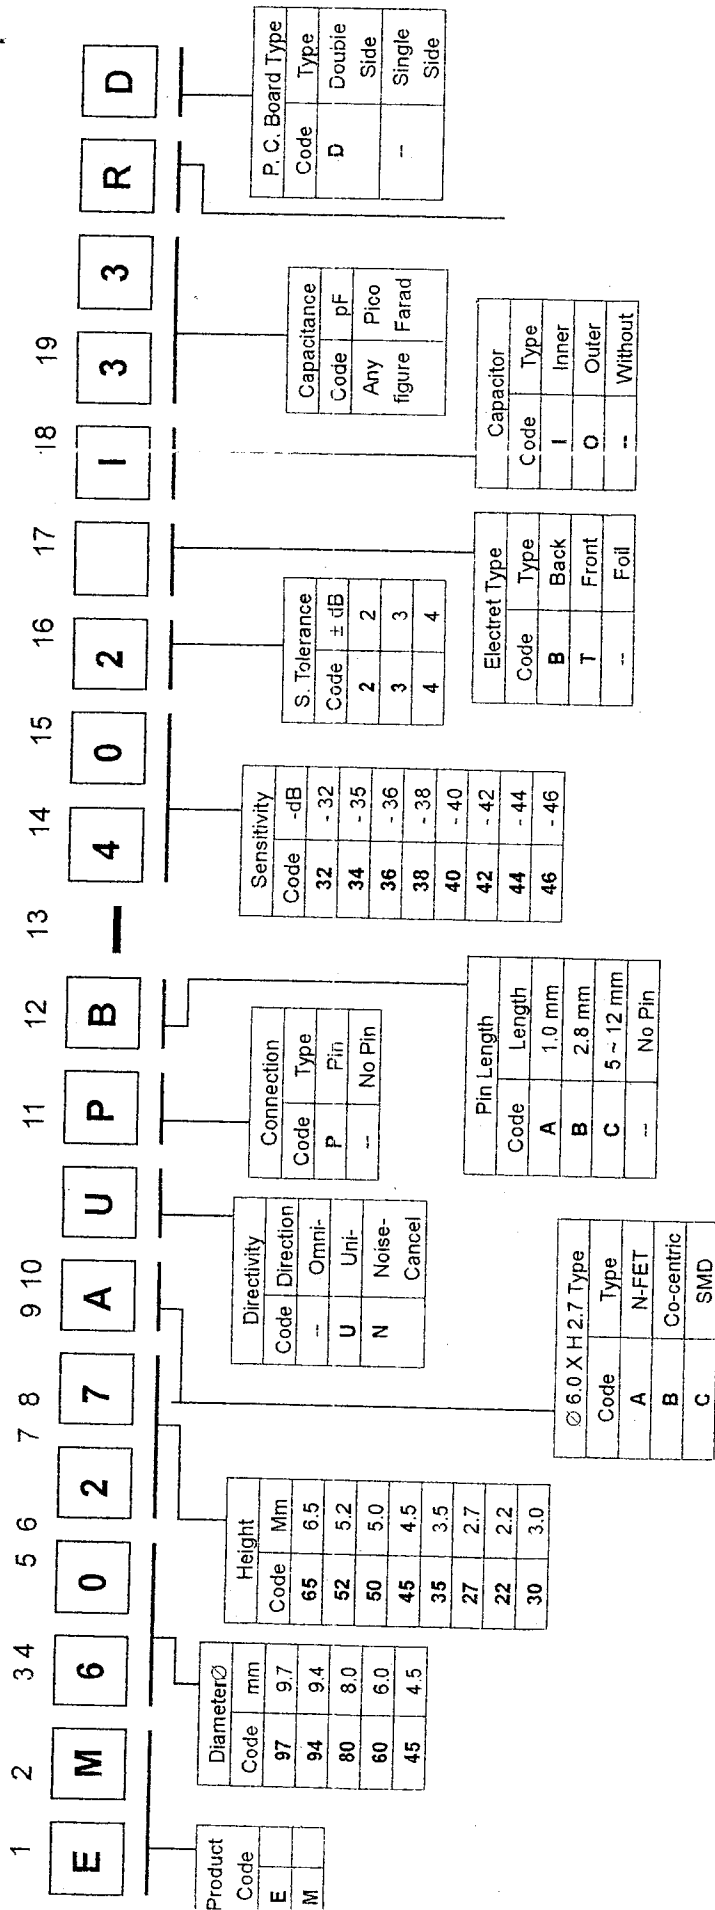

Resistor	
Code	Type
R	With
--	Without

SHENZHEN HORN INDUSTRIAL CO.,LTD.

PACKING LIST OF CONDENSER MICROPHONES

MODEL NO	DIMENSION (mm)	DIRECTIVITY	INNER PACKING (PCS)	MIDDLE PACKING (PCS)	CARTOON (PCS)	GROSS WEIGHT (Kg)	NET WEIGHT (Kg)
EM9765	9.7*6.5	Omni directional	100	1,000	10,000	10	9.5
M9765P	9.7*6.5	Omni directional	N/G	400	4,000	5	4.5
M9752U	9.7*5.2	Unidirectional	100	1,000	10,000	9.5	9
N9752N	9.7*5.2	Noise Cancelling	100	1,000	10,000	9.5	9
M9745	9.7*4.5	Omni directional	100	1,000	10,000	9	8.5
M9745P	9.7*4.5	Omni directional	N/G	400	4,000	3.5	3
M9465	9.4*6.5	Omni directional	100	1,000	10,000	9.5	9
M9465P	9.4*6.5	Omni directional	N/G	400	4,000	4.5	4
M8050U	8.0*5.0	Unidirectional	50	1,000	15,000	10	9.5
M6050	6.0*5.0	Omni directional	100	2,000	30,000	10.5	10
M6050P	6.0*5.0	Omni directional	100	1,000	10,000	3.5	3
M6050U	6.0*5.0	Unidirectional	100	2,000	30,000	10.5	10
M6050N	6.0*5.0	Noise Cancelling	100	2,000	30,000	10.5	10
M6035	6.0*3.5	Omni directional	100	2,000	30,000	9.5	9
M6027	6.0*2.7	Omni directional	100	2,000	30,000	7.5	7
I6027PA	6.0*2.7	Omni directional	100	2,000	30,000	7.5	7
M4530	4.5*3.0	Omni directional	100	2,000	30,000	6.5	6