

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



Address:
Block 9, Shuiwei Ind Zone, Shuiwei New
Village, Dalang, Longhua, Shenzhen,
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website: www.horn.com.cn

CUSTOMER: Digi-Key Corporation

APPROVAL SHEET

| PRODUCT NAME | PART NUMBER | DIMENSION | |
|-------------------------------------|-------------|---------------|--|
| Electret Condenser Microphone | EM1050-38 | Ø10.0×5.0(mm) | |

| APPROVED BY | CHECKED BY | ISSUED BY |
|-------------|---|---|
| |  |  |

APPROVED BY

DATE:

Address:
Block 9, Shuiwei Ind Zone, Shuiwei New
Village, Dalang, Longhua, Shenzhen,
Guangdong, China 518109


Tel: (86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website: www.horn.com.cn

SPECIFICATION

| Item | Symbol | Test conditions | Min | Standard | Max | Unit |
|----------------------------|-----------------|---------------------------------|-----|----------|-----|--------------------------------|
| Sensitivity | S | f=1KHz. Pin=1Pa | -40 | -38 | -36 | dB <small>0dB=1V/Pa</small> |
| Directivity | Omnidirectional | | | | | |
| Impedance | Zout | | | | 2.2 | KΩ |
| Input sound pressure level | S.P.L | | | | 100 | dB |
| Operation voltage | Vs | - | 1.0 | 4.5 | 10 | V |
| Current consumption | I | f=1KHz. Pin=1Pa. | | | 500 | uA |
| Sensitivity reduction | ΔS | f=1KHz. Pin=1Pa. Vs=4.5→1.5V | | | -3 | dB |
| S/N ratio | S/N(A) | f=1KHz. Pin=1Pa. A=curve | 60 | | | dB |

Measurement Circuit (Test Condition Vs=4.5V RL=2.2KΩ

Ta=20°C R.H=65%)

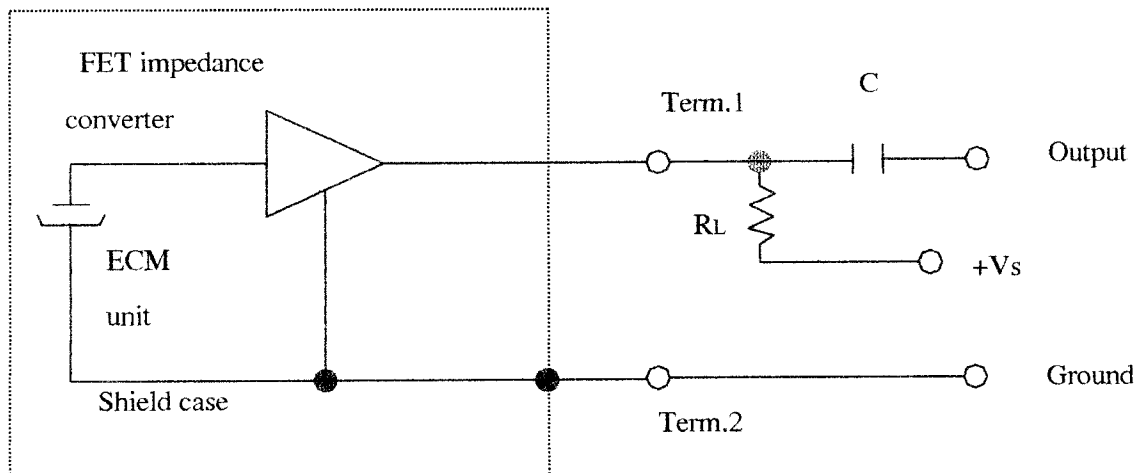


PART NUMBER : EM1050-38

Address:
Block 9, Shuiwei Ind Zone, Shuiwei New
Village, Dalang, Longhua, Shenzhen,
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website: www.horn.com.cn


Dimensional Drawing

unit: mm

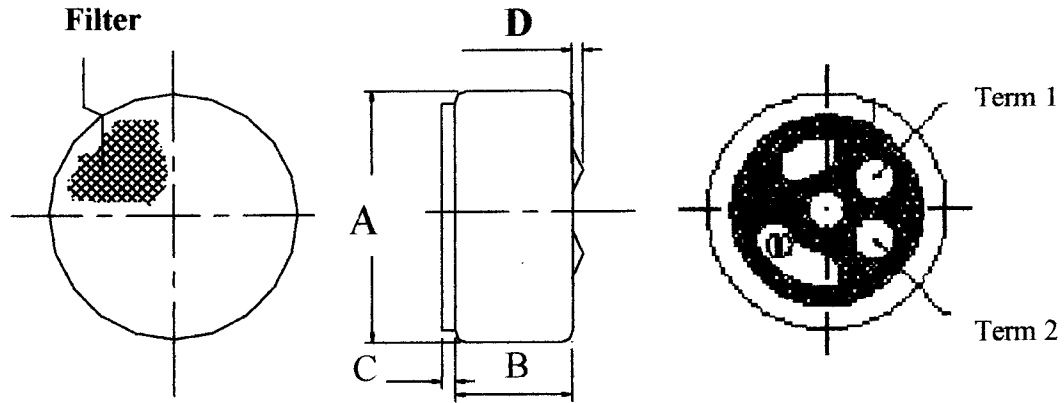

| PART | MIN | STANDARD | MAX | REMARK |
|------|------|----------|-------|--------|
| A | Ø9.8 | Ø10.0 | Ø10.2 | |
| B | 4.8 | 5.0 | 5.2 | |
| C | 0.1 | 0.2 | 0.3 | |
| D | - | - | 0.8 | |

Typical Frequency Response Curve

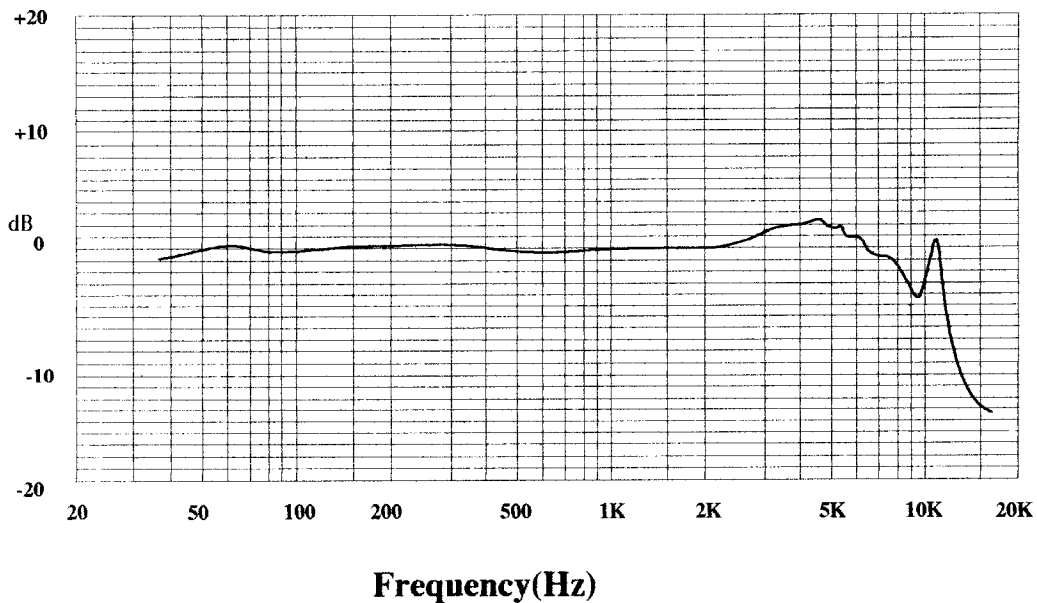



Electret Condenser Microphone Units

深圳市豪恩电声科技有限公司

Shenzhen Horn Electroacoustic Technology Co.,Ltd

SPEC.SHEET NO: W031206009

Address:
Block 9, Shuiwei Ind Zone, Shuiwei New
Village, Dalang, Longhua, Shenzhen,
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website: www.horn.com.cn

Ambient condition

(1) Operating condition

Ambient temperature: $-10^{\circ}\text{C} \sim +45^{\circ}\text{C}$

Relative humidity: $\leq 85\%$

(2) Storage condition

Ambient temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Relative humidity: $45\% \sim 75\%$

Reliability Test

1) Vibration Test

To be no interference in operation after vibration of full amplitude 2mm for 30 minutes at three axis, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

2) Drop test

To be no interference in operation after dropped to concrete floor each time from 1 meter height of three directions in state of packing, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

3) High Temperature Storage:

To be no interference in operation after high temperature test $70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 48 hours. The sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

4) Isotherm & Iso-humidity Storage

To be no interference in operation after storage test at temperature $60^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and relative humidity ($93 \pm 3\%$) for 48 hours, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity, the test is performed at temperature 20°C after operation for 6 hours.

5) Low Temperature Storage

To be no interference in operation after test at temperature $-20^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 48 hours, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

6) Temperature Cycle Test

After exposure at $+55 \pm 2^{\circ}\text{C}$ for 1 hour, at $20 \pm 2^{\circ}\text{C}$ for 1 hour, at $-10 \pm 2^{\circ}\text{C}$ for 1 hour, at $20 \pm 2^{\circ}\text{C}$ for 1 hour, with 5 cycles. Change of sensitivity within $\pm 3\text{dB}$ from initial measuring should be done after 2 hours exposed to $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$.

7) Collision Test

After collided with the acceleration $100 \pm 10\text{m/s}$, at the vertical & horizontal directions for 1000 ± 10 times. at the state of packing. Change of sensitivity within $\pm 3\text{dB}$ from initial.

TEST RESULT OF SAMPLES

| NO. | 1KHz (dB) | CURRENT (mA) | NOTES |
|-----|-----------|--------------|------------------|
| 1 | -37.8 | 0.19 | (1KHz、0dB=1V/Pa) |
| 2 | -38.6 | 0.17 | |
| 3 | -38.5 | 0.18 | |
| 4 | -38.4 | 0.19 | |
| 5 | -37.7 | 0.16 | |
| 6 | -38 | 0.19 | |
| 7 | -38.3 | 0.17 | |
| 8 | -37.8 | 0.17 | |
| 9 | -38.2 | 0.19 | |
| 10 | -38.2 | 0.19 | |
| 11 | -38.7 | 0.17 | |
| 12 | -38.6 | 0.15 | |
| 13 | -38.8 | 0.21 | |
| 14 | -38.7 | 0.21 | |
| 15 | -39.2 | 0.2 | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Customer: Digi-Key Corporation

Date: 2003.12.09


Part number: EM1050-38

Sensitivity: -38±2dB

Test condition: 2.2K Ω 4.5V

Tester: G1

SHENZHEN HORN ELECTROACOUSTIC TECHNOLOGY CO.,LTD.
X:1.0000kHz *Y:-38.52dB* ZA:Live Curve SSR Fund.

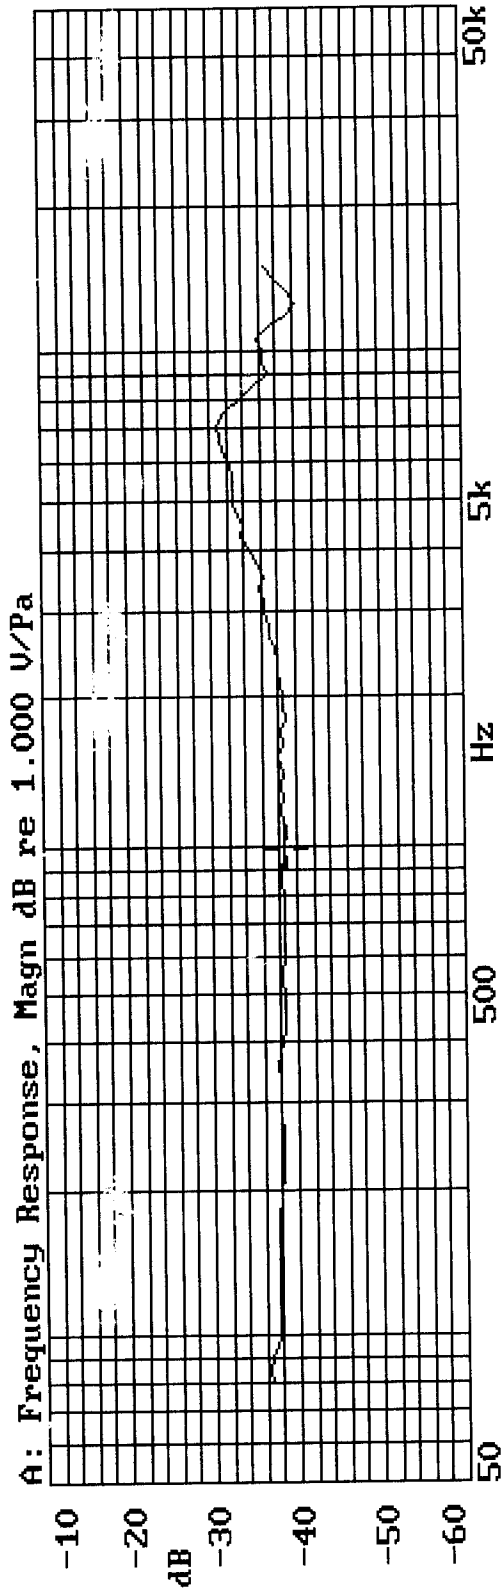

MODEL : EM1050-38
CODE : 3#
SENSITIVITY : -38.52dB (1KHz)
TEST CONDITION : 2.2K Ω 4.5V

08-DEC-2003 16:09:15

Mode: SSR





Electret Condenser Microphone Units

深圳市豪恩电声科技有限公司

SHENZHEN HORN ELECTROACOUSTIC TECHNOLOGY CO., LTD

TEL: 86-755-28121370/28121371/28109416/28109419

FAX: 86-755-28109417

Website:www.horn.com.cn

E-mail:rd@horn.com.cn

Certificate of Confirmed Products

Date: Dec. 07. 2003

NO: W031206008

| | | | | |
|--------------------------------|---------------------------------|----------------------------------|--------------------------------------|--|
| SUPPLIER | HORN | BUYER | Digi-Key Corporation | |
| TITLE | ECM | MODEL | EM1050-38 | |
| SIZE | $\phi 10.0 \times 5.0\text{mm}$ | TEST CONDITION | 2.2K Ω 4.5V | |
| QUANTITY | | SAMPLE: 15PCS | | |
| SPECIFICATIONS | | | | |
| Sensitivity | | -38 \pm 2dB (0dB=1V/Pa. 1KHz) | | |
| Directivity | | Omnidirectional | | |
| Impedance | | Low impedance | | |
| Standard operation voltage | | 4.5V | | |
| Operation voltage | | 1.0-10V | | |
| Current consumption | | Max 500uA | | |
| Maximum input S.P.L | | 100dB | | |
| S/N ratio | | More than 60 dB | | |
| Sensitive reduction | | within-3dB at 1.5V | | |
| The test result from customers | | Signature: _____ . _____ . 2003 | | |
| Final confirmed | Pass | Refuse | Accepted basis on | |
| Remarks | | | | |

***** The form must be confirmed by return fax after your test as your best regards! *****