

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Brad® Mini-Change® A-Size Single-Ended Cordsets

130006

Male

**Straight, Right Angle
Internal Thread**



Features and Benefits

- Low-resistance contact design with Gold over Nickel plating
- Epoxy coated coupling nut is corrosion and weld slag resistant
- Cable is oil, water and abrasion resistant

Reference Information

UL File No.: E152210
CSA File No.: LR6837

Electrical

Voltage: 600V AC/DC

Mechanical


Wire Size: 16 AWG
Cable Type: UL Type STOOW

Physical

Connector Face: PVC
Connector Body: PVC
Contact: Brass with Gold over Nickel plating
Coupling Nut: Black epoxy coated Zinc
Cable: UL Type STOOW, 105C
Hard Service Cord (A01)
Cable Jacket: PVC
Cable Jacket Color: Yellow
Operating Temperature: -20 to +105°C

Environmental


Protection: IP67

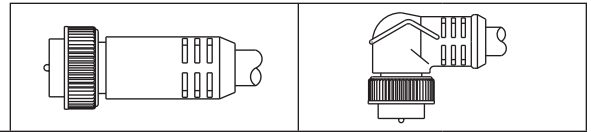

Poles (Male View)	Current	Cable Type	Cable Jacket (Cable Code)	Wire Size AWG	Length	Male Straight		Male Right Angle	
						Engineering No.	Standard Order No.	Engineering No.	Standard Order No.
2 Pole 1 - white 2 - black	13.0A	STOOW	PVC (A01)	16	6'	102002A01F060	130006-0159		
3 Pole 1 - green 3 - white 2 - black	13.0A	STOOW	PVC (A01)	16	6'	103002A01F060	130006-0534	103003A01F060	130006-0647
4 Pole 1 - black 3 - red 2 - white 4 - grn-yel	10.0A	STOOW	PVC (A01)	16	6'	104002A01F060	130006-0995	104003A01F060	130006-1087
5 Pole 1 - red/white 4 - red/yel 2 - red 5 - red/blk 3 - green	8.0A	STOOW	PVC (A01)	16	6'	105002A01F060	130006-1438	105003A01F060	130006-1518
6 Pole 1 - white 4 - orange 2 - red 5 - black 3 - green-gnd 6 - blue	8.0A	STOOW	PVC (A01)	16	6'	106002A01F060	130006-1675		

Note: Sales drawings for all standard order numbers are available on molex.com

Configuration Code*
Build-a-Part Number

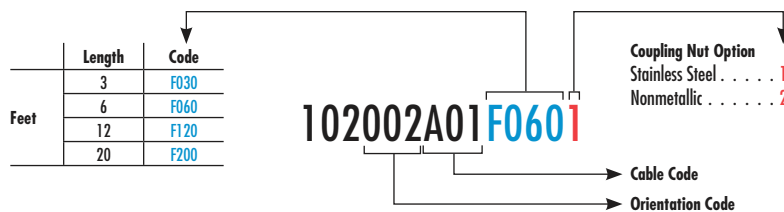

*Once an engineering number is created using the configuration code, consult Molex tech support for information regarding any part numbers.