

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Fiber optic cables - VS-P1215-P1218-C1001/ 2,0 - 1608980

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled PROFINET-fiber optic cable, round cable, HCS fiber 200/230 μm , SCRJ/IP67 push-pull plastic housing on SCRJ/IP20, for installation inside buildings, length: 2 m



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	222.22 GRM
Custom tariff number	85447000
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	2
Connection profile	SCRJ in acc. with IEC 61754-24
Locking type	Push Pull
Fiber	200/230 μm
Number of fibers	2.00
Insertion/withdrawal cycles	≥ 500
Cable diameter	7.50 mm
Type of cable	Round cable
Length of cable	2 m

Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C (cable, fixed installation)
	-10 °C ... 60 °C (cable, flexible installation)
	Plug / socket
Degree of protection	IP67/IP20

Material data

Fiber optic cables - VS-P1215-P1218-C1001/ 2,0 - 1608980

Technical data

Material data

Housing material	PA-GF/PBT
Material, O-ring	NBR
Cable seal material	TPE
Outer sheath, material	LSFH
External sheath, color	green-yellow RAL 6018
Ferrule holder color	Red

Optical characteristics

Attenuation	≤ 1.2 dB (With 850 nm)
-------------	------------------------

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27061803
eCl@ss 6.0	27061090
eCl@ss 7.0	27061090

ETIM

ETIM 3.0	EC000034
ETIM 4.0	EC001476
ETIM 5.0	EC000034


UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501


Drawings

Fiber optic cables - VS-P1215-P1218-C1001/ 2,0 - 1608980

Schematic diagram




Schematic diagram



Pin assignment plug SCRJ


Dimensioned drawing

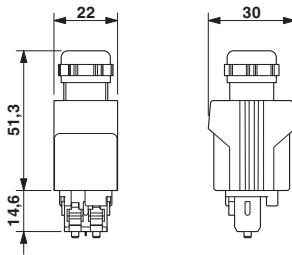

SCRJ Push-Pull connector, IP67

Pin assignment plug SCRJ

Dimensioned drawing

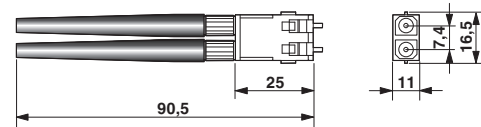

SCRJ connector IP20