


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Customer Product Print

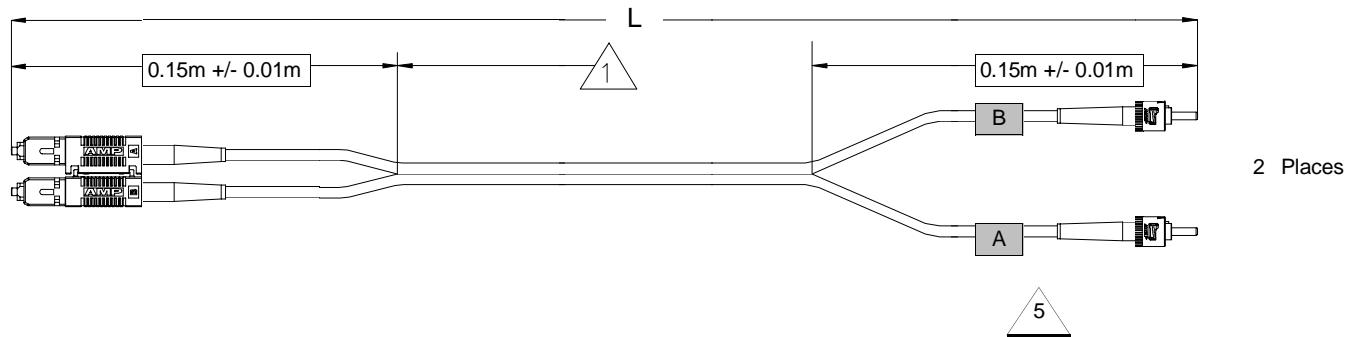

Connector Information

Connector(s): SC-Duplex
 Mode: MM Ferrule Material: Ceramic
 Male/Female: N/A Housing Color: Beige

Boot Information

SC, FC Straight 3.0mm Boot	
Straight	Beige/Beige

Cable Information

Number of Fibers: 2
 Mode: MM
 Jacket Diameter: 3 mm
 Jacket Color: Orange
 FiberType: 62.5/125
 Flame Rating: OFNR (Riser)

FiberPath

A - ████████ B Blue
 B - ████████ A Black

Connector Information

Connector(s): ST
 Mode: MM Ferrule Material: Ceramic
 Male/Female: N/A Housing Color: N/A

Boot Information

ST Short 3.0 mm	
Straight	Black/Blue

Notes:

- 1 Label dimension "T" meters +/- 0.030 meters from reference. See labeling requirements table for "T" dimension(s).
- 2 Install dust caps (not shown on print).
- 3 Note not used on this print
- 4 Note not used on this print
- 5 Leg labels to be flagged 0.01m +/- 0.005m from strain relief boot.

This is a controlled document	Scale: NTS	Drawing Number: 504958 Revision: K
This information is confidential and proprietary to Tyco Electronics Corporation and its worldwide subsidiaries and affiliates. It may not be disclosed to anyone other than Tyco Electronics personnel without written authorization from Tyco Electronics Corporation, Harrisburg, PA USA	Tyco Electronics Harrisburg, PA 17105-3608 USA	FO C/A - 2 fiber, 3mm, 62.5/125, MM, OFNR (Riser), SC-Duplex to ST
		Sheet 1 of 3

Customer Product Print

1

Labeling Requirements:

Dash #	Label Data Field A	Label Data Field B	Label Data Field C	Label Data Field D	Label Placement	"T" Dim. (meters)
All	Trace No. Bar Coded & Human Readable	Tyco Logo	Tyco P/N	Not Used	Flag On Cable	0.110

Lengths and Loss:

Dash #	"L" Dimension (meters)	SC-Duplex, Standard, Beige	ST, Standard
1	0.950 - 1.050	IL 0.50 (dB) BR N/A (dB)	IL 0.50 (dB) BR N/A (dB)
2	1.950 - 2.050	IL 0.50 (dB) BR N/A (dB)	IL 0.50 (dB) BR N/A (dB)
3	2.950 - 3.050	IL 0.50 (dB) BR N/A (dB)	IL 0.50 (dB) BR N/A (dB)
4	4.950 - 5.050	IL 0.51 (dB) BR N/A (dB)	IL 0.51 (dB) BR N/A (dB)
5	9.900 - 10.100	IL 0.52 (dB) BR N/A (dB)	IL 0.52 (dB) BR N/A (dB)
6	14.850 - 15.150	IL 0.52 (dB) BR N/A (dB)	IL 0.52 (dB) BR N/A (dB)
7	19.800 - 20.200	IL 0.53 (dB) BR N/A (dB)	IL 0.53 (dB) BR N/A (dB)
8	5.940 - 6.060	IL 0.51 (dB) BR N/A (dB)	IL 0.51 (dB) BR N/A (dB)
9	6.930 - 7.070	IL 0.51 (dB) BR N/A (dB)	IL 0.51 (dB) BR N/A (dB)
10	7.920 - 8.080	IL 0.51 (dB) BR N/A (dB)	IL 0.51 (dB) BR N/A (dB)
11	10.890 - 11.110	IL 0.52 (dB) BR N/A (dB)	IL 0.52 (dB) BR N/A (dB)
12	12.870 - 13.130	IL 0.52 (dB) BR N/A (dB)	IL 0.52 (dB) BR N/A (dB)
13	2.390 - 2.490	IL 0.50 (dB) BR N/A (dB)	IL 0.50 (dB) BR N/A (dB)
14	0.290 - 0.370	IL 0.50 (dB) BR N/A (dB)	IL 0.50 (dB) BR N/A (dB)

This is a controlled document	Scale: NTS	Drawing Number: 504958 Revision: K
This information is confidential and proprietary to Tyco Electronics Corporation and its worldwide subsidiaries and affiliates. It may not be disclosed to anyone other than Tyco Electronics personnel without written authorization from Tyco Electronics Corporation, Harrisburg, PA USA	Tyco Electronics Harrisburg, PA 17105-3608 USA	FO C/A - 2 fiber, 3mm, 62.5/125, MM, OFNR (Riser), SC-Duplex to ST
		Sheet 2 of 3

Customer Product Print

25	24.750 - 25.250	IL 0.54 (dB) BR N/A (dB)	IL 0.54 (dB) BR N/A (dB)
30	29.700 - 30.300	IL 0.55 (dB) BR N/A (dB)	IL 0.55 (dB) BR N/A (dB)

This is a controlled document

This information is confidential and proprietary to Tyco Electronics Corporation and its worldwide subsidiaries and affiliates. It may not be disclosed to anyone other than Tyco Electronics personnel without written authorization from Tyco Electronics Corporation, Harrisburg, PA USA

Scale: NTS

Tyco Electronics
Harrisburg, PA
17105-3608 USA

Drawing Number: **504958** Revision: **K**

FO C/A - 2 fiber, 3mm, 62.5/125, MM, OFNR
(Riser), SC-Duplex to ST

Sheet 3 of 3