

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。



Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC., U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.


DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
XX6-52X-D		X1	CUSTOMER APPROVAL	03/26/99	E.V.
		X2	ADD RETRACTED LENGTH	03/29/99	E.V.

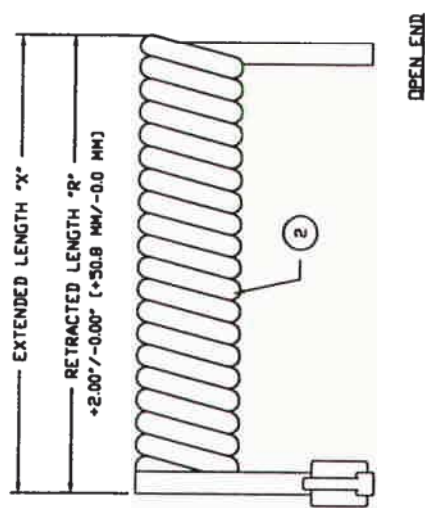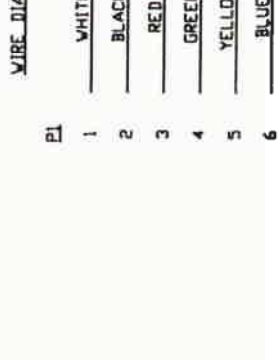

CUSTOMER APPROVAL
 ENGR. SIGN *Math Limer*
 DATE: 4-13-99

466-146-525-D	121-610-022	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	WHITE
466-146-524-D	121-610-012	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	BLACK
466-146-523-D	121-610-002	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	SILVER SATIN
466-106-522-D	121-610-021	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	WHITE
466-106-521-D	121-610-011	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	BLACK
466-106-520-D	121-610-001	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	SILVER SATIN
466-076-525-D	121-610-020	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	WHITE
466-076-524-D	121-610-010	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	BLACK
466-076-523-D	121-610-000	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	SILVER SATIN
466-056-522-D	121-610-023	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	WHITE
466-056-521-D	121-610-013	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	BLACK
466-056-520-D	121-610-003	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	SILVER SATIN
IDI PART NUMBER	IDI CABLE PART NUMBER	EXTENDED LENGTH "X"	RETRACTED LENGTH "R"	

NOTES: UNLESS OTHERWISE SPECIFIED.
 1. TEST CABLE FOR ALL OPENS & SHORTS.
 2. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.



UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN INCHES (MILLIMETER)
 2) TOLERANCES:
 XXX ± 0.25 (6.35)

TABULATION BLOCK

THIRD ANGLE PROJECTION

I/O INTERCONNECT
 SANTA ANA, CALIFORNIA

SCALE: NONE SHEET 1 OF 1

DESCRIPTION

CABLE ASSEMBLY PARTS LIST

MODULAR COIL CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, PVC JACKET, (SEE TABULATION BLOCK FOR COLOR), CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U" Au, FLAT TYPE EXIT.

SEE "TABULATION BLOCK"

ITEM QTY MFG. IDI PART NO.

2 1 PC IDI 325-661-50X

1 1 PC IDI 325-661-50X

2 1 PC IDI 325-661-50X

2 1 PC IDI 325-661-50X

2 1 PC IDI 325-661-50X


A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. ALL RIGHTS ARE RESERVED. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.


DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
XX6-31X-D		X1	CUSTOMER APPROVAL	03/26/99	E.V.
		X2	ADD RETRACTED LENGTH	03/29/99	E.V.

WIRE DIAGRAM


P1	P2
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

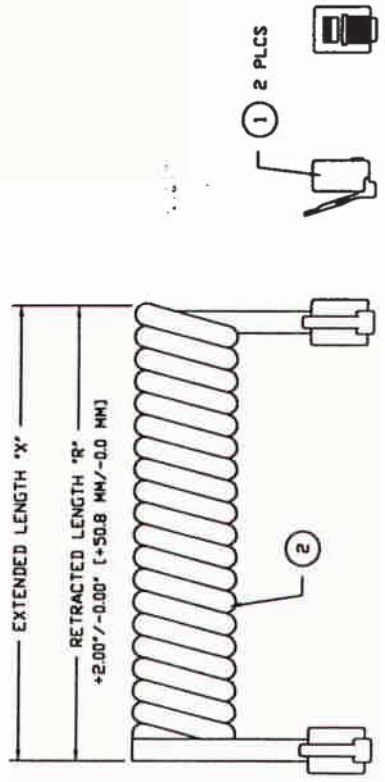

P2



P1



CUSTOMER APPROVAL
 ENGR. SIGN *Math Yarnes*
 DATE: 4-13-99

- NOTES: UNLESS OTHERWISE SPECIFIED.
- TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

466-146-515-D	121-610-022	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	WHITE
466-146-514-D	121-610-012	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	BLACK
466-146-513-D	121-610-002	14.0 FT (4.3 M)	44.0 IN (1117.6 MM)	SILVER SATIN
466-106-512-D	121-610-021	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	WHITE
466-106-511-D	121-610-011	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	BLACK
466-106-510-D	121-610-001	10.0 FT (3.0 M)	32.0 IN (812.8 MM)	SILVER SATIN
466-076-515-D	121-610-020	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	WHITE
466-076-514-D	121-610-010	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	BLACK
466-076-513-D	121-610-000	7.0 FT (2.1 M)	24.0 IN (609.6 MM)	SILVER SATIN
466-056-512-D	121-610-013	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	WHITE
466-056-511-D	121-610-012	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	BLACK
466-056-510-D	121-610-003	5.0 FT (1.5 M)	18.0 IN (457.2 MM)	SILVER SATIN
IDI PART NUMBER	IDI CABLE PART NUMBER	EXTENDED LENGTH "X"	RETRACTED LENGTH "R"	

TABULATION BLOCK

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES (MILLIMETER) TOLERANCES: .XXX ± 0.25 (6.35)

TITLE: I/O INTERCONNECT
 SANTA ANA, CALIFORNIA

STANDARD STYLE, CABLE ASSEMBLY

PART NO. 466-316-31X-D

DWG. NO. 466-316-31X-D

DATE: 03/26/99

DESIGNED BY: E.V.

CHECKED BY: E.V.

SCALE: NONE

SHEET 1 OF 1

ITEM	QTY	MFG.	IDI PART NO.	DESCRIPTION
2		SEE	*TABULATION BLOCK*	MODULAR COIL CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, PVC JACKET, (SEE TABULATION BLOCK FOR COLOR).
1	2 PCS	IDI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U" AU, FLAT TYPE EXIT.

CABLE ASSEMBLY PARTS LIST


A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. ANY REPRODUCTION OR USE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
XX6-511-D		XI	CUSTOMER APPROVAL	03/24/99	E.V.

WIRE DIAGRAM

P1		P2
1	WHITE	6
2	BLACK	5
3	RED	4
4	GREEN	3
5	YELLOW	2
6	BLUE	1

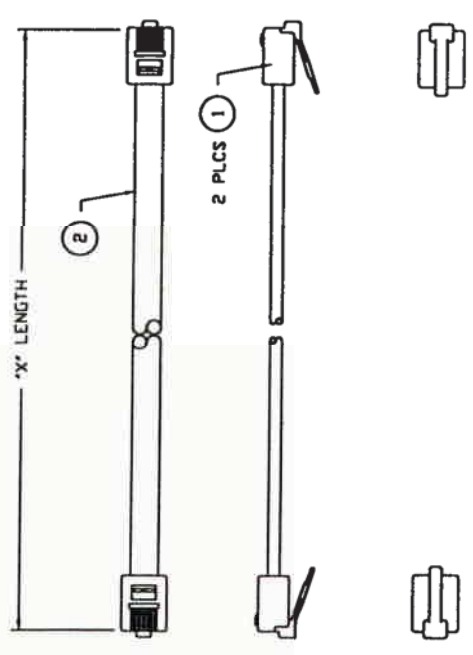

CUSTOMER APPROVAL
 ENGR. SIGN *Math Sumic*
 DATE: 4-12-99

- H1662 - 25' - ND
- H1662 - 14' - ND
- H1662 - 07' - ND

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

466-256-511-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-511-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-511-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM
PART NUMBER	LENGTH 'X'
I/O INTERCONNECT	

I/O INTERCONNECT
 SANTA ANA, CALIFORNIA

THIRD ANGLE PROJECTION


UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN INCHES (MILLIMETER)
 2) TOLERANCES:
 .1XX ± 0.25 (6.35)

REV.	XI	SHEET	1	OF	1
SCALE	NONE				
CUSTOMER	DIGI KEY				
PWG. NO.	466-XX6-511-D				
PART NO.	466-XX6-511-D				
TITLE	BLACK, CABLE ASSEMBLY				
DESCRIPTION	6P6C MODULAR, STANDARD STYLE,				

ITEM	QTY	MFG.	IDI PART NO.	DESCRIPTION
2	'X'	IDI	120-610-010	MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, BLACK PVC.
1	2 PCS	IDI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50u" AU, FLAT TYPE EXIT.

CABLE ASSEMBLY PARTS LIST

A	B	C	D	E	F	G	H
THESE DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. ANY REUSE OR REPRODUCTION OF THIS DOCUMENT WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.		DWG. NO. XXG-510-D		ZONE XI	REV. XI	DESCRIPTION CUSTOMER APPROVAL	DATE 03/24/99
						APPROVED E.V.	

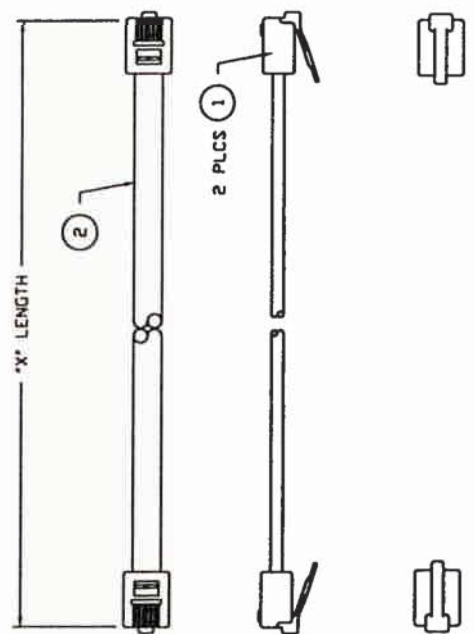

WIRE DIAGRAM

P1	P2
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

CUSTOMER APPROVAL
 ENGR. SIGN Math Danner
 DATE: 4-12-99

H1663-25-ND
 H1663-14-ND
 H1663-07-ND

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

466-256-510-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-510-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-510-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM
PART NUMBER	LENGTH *X*

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES (MILLIMETER) TOLERANCES:
 X.XX ± 0.25 (6.35)

I/O INTERCONNECT
 SANTA ANA, CALIFORNIA

6P6C MODULAR, STANDARD STYLE, SILVER SATIN, CABLE ASSEMBLY

PART NO. 466-XX6-510-D
 BAG NO. 466-XX6-510-D
 CUSTOMER DIGI KEY
 REV. XI



ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION
2	X'	IOI	120-610-000	MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, SILVER SATIN PVC.
1	2 PCS	IOI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50u" Au, FLAT TYPE EXIT.

CABLE ASSEMBLY PARTS LIST

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

WIRE DIAGRAM

P1		P2
1	WHITE	1
2	BLACK	2
3	RED	3
4	GREEN	4
5	YELLOW	5
6	BLUE	6

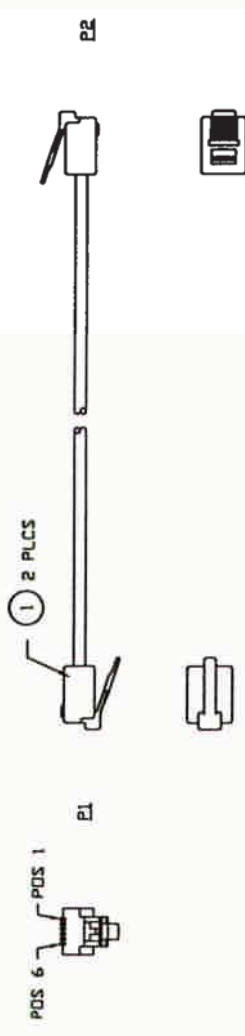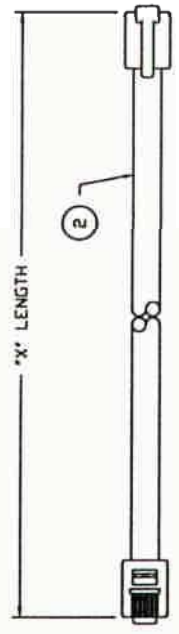


CUSTOMER APPROVAL
 ENGR. SIGN Math Lemme
 DATE: 4-12-99

466-256-502-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-502-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-502-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM
PART NUMBER	LENGTH 'X'
I/O INTERCONNECT	

HZ661-25-ND
 HZ661-14-ND
 HZ661-07-ND

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.



UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN INCHES (MILLIMETER)
 2) TOLERANCES:
 XXX ± 0.25 (6.35)

I/O INTERCONNECT	
SANTA ANA, CALIFORNIA	
TITLE:	6P6C MODULAR, REVERT STYLE, WHITE, CABLE ASSEMBLY
PART NO.:	466-XX6-502-D
DWG. NO.:	466-XX6-502-D
CUSTOMER:	DIGI KEY
REV.:	XI
SCALE:	NONE
SHEET:	1 OF 1

ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION
2	'X'	IOI	120-610-020	MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, WHITE PVC.
1	2 PCS	IOI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U' AV., FLAT TYPE EXIT.

CABLE ASSEMBLY PARTS LIST




A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC., U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
XX6-501-D		XI	CUSTOMER APPROVAL	03/24/99	E.V.

WIRE DIAGRAM

P1	P2
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE



CUSTOMER APPROVAL

ENGR. SIGN M.H. Garner
DATE: 4-12-99

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

H2662-25-ND
H2662-14-ND
H2662-07-ND

466-256-501-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-501-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-501-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM

PART NUMBER
I/O INTERCONNECT

LENGTH 'X'



UNLESS OTHERWISE NOTED
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
X.XX ± 0.25 (6.35)

FILE NO.	6P6C MODULAR, REVERT STYLE, BLACK, CABLE ASSEMBLY
PART NO.	466-XX6-501-D
DRAWING NO.	466-XX6-501-D
CUSTOMER	DIGI KEY
SCALE	NONE
REV.	XI
SHEET	1 OF 1

MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, BLACK PVC.


CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U Au, FLAT TYPE EXIT.

DESCRIPTION

CABLE ASSEMBLY PARTS LIST

ITEM	QTY	MFG.	IOI PART NO.
2	1	IOI	120-610-010
1	2	PCS	325-661-50X

A	B	C	D	E	F	G	H
THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. UNLESS OTHERWISE NOTED. NO REPRODUCTION OR USE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.		DWG. NO. XX6-500-D		ZONE REV. X1	DESCRIPTION CUSTOMER APPROVAL	DATE 03/24/99	APPROVED E.V.

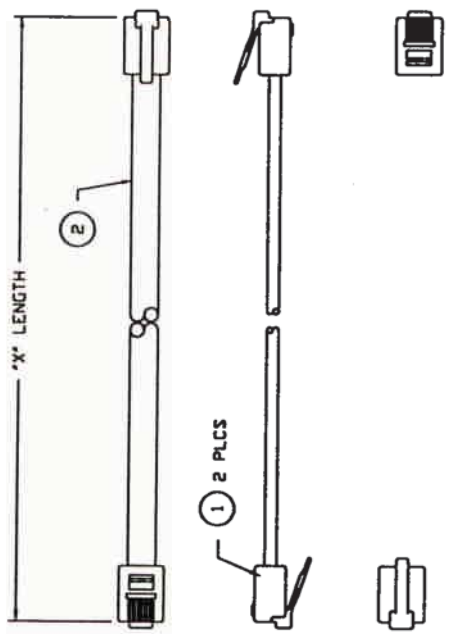

CUSTOMER APPROVAL
 ENGR. SIGN Mathy Lemme
 DATE: 4-12-99


466-256-500-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-500-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-500-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM
PART NUMBER	LENGTH "X"
I/O INTERCONNECT	

THIRD ANGLE PROJECTION 	
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES (MILLIMETER) TOLERANCES: .XXX ± 0.25 (6.35)	
TITLE I/O INTERCONNECT SANTA ANA, CALIFORNIA	PART NO. 466-XX6-500-D PPG NO. 466-XX6-500-D CUSTOMER DIGI KEY
SCALE NONE	SHEET 1 OF 1

ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION
2	"X"	IOI	120-610-000	MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, SILVER SATIN PVC.
1	2 PCS	IOI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50u" AU, FLAT TYPE EXIT.
CABLE ASSEMBLY PARTS LIST				

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

A	B	C	D	E	F	G	H	
THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO REUSE OR REPRODUCTION IS PERMITTED WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC OR ITS AFFILIATED SUBSIDIARIES.		DWG. NO. XX6-522-D		ZONE X1	REV. X1	DESCRIPTION CUSTOMER APPROVAL	DATE 03/24/99	APPROVED E.V.

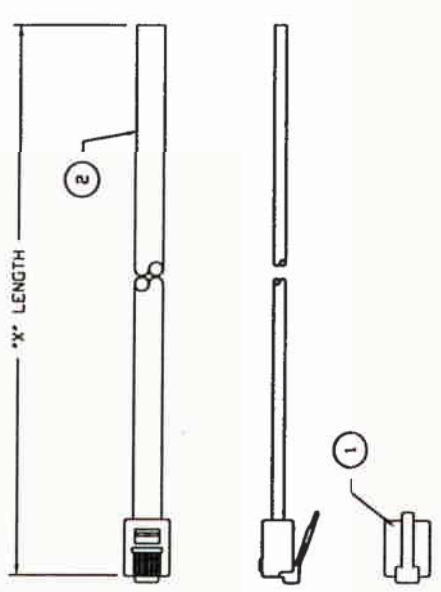

WIRE DIAGRAM

PL	WIRE	OPEN END
1	WHITE	
2	BLACK	
3	RED	
4	GREEN	
5	YELLOW	
6	BLUE	

CUSTOMER APPROVAL

ENGR. SIGN Math A

DATE: 4-12-99

H3661-25-ND
H3661-14-ND
H3661-07-ND

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, WHITE PVC.

CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U' AU, FLAT TYPE EXIT.

DESCRIPTION

CABLE ASSEMBLY PARTS LIST

ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION
2	X'	IOI	120-610-020	MODULAR CABLE, 26 AWG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, WHITE PVC.
1	1 PC	IOI	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U' AU, FLAT TYPE EXIT.

466-256-522-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-522-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-522-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM

PART NUMBER
I/O INTERCONNECT

LENGTH *X*



TITLE
I/O INTERCONNECT
SANTA ANA, CALIFORNIA




UNLESS OTHERWISE NOTED
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
X.XX ± 0.25 (6.35)

REV. X1	DIGI KEY	SHEET 1 OF 1
REV. X1	SCALE NONE	
CUSTOMER	466-XX6-522-D	
PART NO.	466-XX6-522-D	
TITLE	GP6C MODULAR, TO OPEN END, WHITE, CABLE ASSEMBLY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC., U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.	DWG. NO. XX6-521-D	ZONE XI	REV. XI	DESCRIPTION CUSTOMER APPROVAL	DATE 03/24/99	APPROVED E.M.
--	-----------------------	------------	------------	----------------------------------	------------------	------------------

WIRE DIAGRAM

PL	OPEN END
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

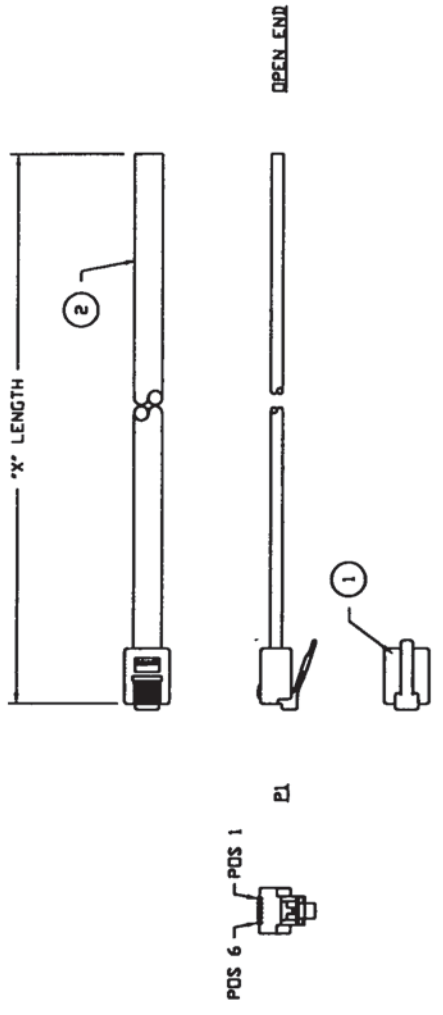

CUSTOMER APPROVAL
 ENGR. SIGN *Matt Roman*
 DATE: 4-12-99

H3662-25-ND
 H3662-14-ND
 H3662-07-ND

466-256-521-D	25.0 FT ± 4.0 IN 762 M ± 101.6 MM
466-146-521-D	14.0 FT ± 3.0 IN 427 M ± 76.2 MM
466-076-521-D	7.0 FT ± 2.0 IN 213 M ± 50.8 MM
PART NUMBER	LENGTH 'X'

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED
 1) DIMENSIONS ARE IN INCHES (MILLIMETER)
 2) TOLERANCES:
 XXX ± 0.25 (6-35)

I/O INTERCONNECT
 SANTA ANA, CALIFORNIA

6P6C MODULAR, TO OPEN END,
 BLACK, CABLE ASSEMBLY

PART NO. 466-XX6-521-D
 DWG NO. 466-XX6-521-D
 CUSTOMER 0101 KEY
 REV. XI

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.


ITEM	QTY	MFG.	IOI PART NO.	DESCRIPTION
2	101		120-610-010	MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, BLACK PVC.
1	1	PC	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U' AW, FLAT TYPE EXIT.

CABLE ASSEMBLY PARTS LIST

A B C D E F G H

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROVED
XXS-520-D		X1	CUSTOMER APPROVAL	03/24/99	E.V.

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC., U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

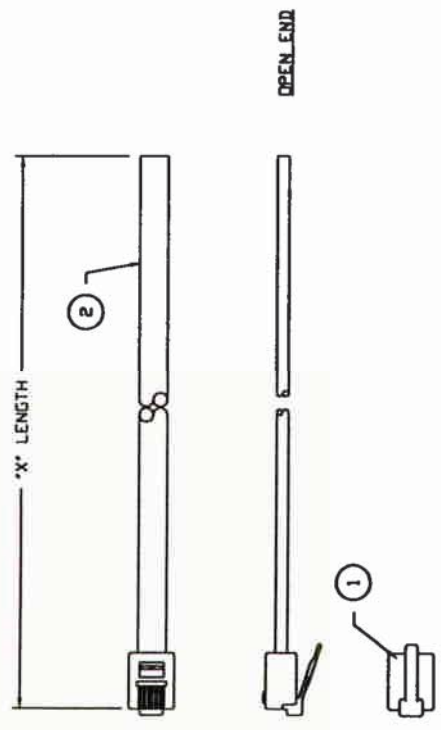

CUSTOMER APPROVAL
 ENGR. SIGN *Walt J. Amic*
 DATE: 4-12-99

466-256-520-D	25.0 FT ± 4.0 IN 7.62 M ± 101.6 MM
466-146-520-D	14.0 FT ± 3.0 IN 4.27 M ± 76.2 MM
466-076-520-D	7.0 FT ± 2.0 IN 2.13 M ± 50.8 MM

H3663-75-ND
 H3663-14-ND
 H3663-07-ND

- NOTES: UNLESS OTHERWISE SPECIFIED.
- CABLE TO BE BUNDLED AND TWIST TIED.
 - TEST CABLE FOR ALL OPENS & SHORTS.
 - PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LOT NUMBER QUANTITIES.

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
 1) DIMENSIONS ARE IN INCHES (MILLIMETER)
 2) TOLERANCES:
 X.XXX ± 0.025 (6-35)

IN THE ORIGINAL DRAWING

REV. XI

SCALE NONE SHEET 1 OF 1

2	'X'	101	120-610-000	MODULAR CABLE, 26 AVG (7/34) BARE COPPER, 6 CONDUCTOR, UNSHIELDED, SILVER SATIN PVC.
1	1 PC	101	325-661-50X	CONNECTOR, MODULAR PLUG, 6 POSITION, 6 CONDUCTOR, 50U" AU, FLAT TYPE EXIT.
ITEM	QTY	MFG.	101 PART NO.	DESCRIPTION

CABLE ASSEMBLY PARTS LIST

PART NUMBER		LENGTH 'X'	
I/O INTERCONNECT			
TITLED		SANTA ANA, CALIFORNIA	
PART NO.		6P6C MODULAR, TO OPEN END, SILVER SATIN, CABLE ASSEMBLY	
REV. NO.		466-XX6-520-D	
CUSTOMER		DIGI KEY	
SCALE		NONE	
SHEET		1 OF 1	