

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

CXP, 150Gb/s Active Optical Cable

DESCRIPTION

The 150Gb/s CXP - CXP Active Optical Cable (AOC) is a natural building block in the range of CXP cable assemblies. It provides a cost effective, high performance, plug and play solution.

Form factor CXP delivers the highest hardware faceplate port density.

The AOC features optical engines inside both cable connectors improving speed and distance versus traditional copper assemblies.

The assembly is a full duplex, 12 channel construction whereby each channel is capable of transmitting data at rates up to 12.5Gb/s

Typical applications are serving transmission distances between 5 and 100m



FEATURES & BENEFITS

- Cost effective**
 - Simplified designs
 - Limited number of discrete components in the link
 - Elimination of on-site cleaning
- Ease of installation**
 - Plug and Play
 - No dust contamination
 - Closed optical system providing 100% eye-safety
- Interoperability**
 - SFF- 8642 compliant
 - Supports Infiniband SDR, DDR and QDR data rates
 - Same brand transceiver on each end
- Reliability**
 - 100% final tested
 - Assembled under clean room environment
 - Optimum Signal Integrity

TARGET MARKETS / APPLICATIONS

- Data Center
- High Performance Computing
- Switching
- Industrial

XLERATE™ -12X

TECHNICAL INFORMATION

MATERIALS

- ▀ Fiber cable:
 - Multi-mode
 - OFNP
- ▀ Mates with:
 - 84 pos CXP board connector

ELECTRICAL PERFORMANCE

- ▀ Power supply voltage: 3.3V
- ▀ Data rate per lane: 12.5 Gbps
- ▀ Power consumption: 2.1 W (typ.)
- ▀ Transmitter type: VCSEL
- ▀ Receiver type: PIN-diode

PACKAGING

- ▀ Blister reel up to 30 meter length
- ▀ Box beyond 30 meter length

ENVIRONMENTAL


- ▀ RoHS 6/6 compliant
- ▀ Laser Class 1 / CDRH
- ▀ Case temperature 0 – 70 degrees C
- ▀ Halogene free (optional)

SPECIFICATIONS

- ▀ Module meets MSA – Small Form Factor SFF-8642
- ▀ Cable assembly supports Infiniband SDR, DDR and QDR
- ▀ Product Specification: GS-12-1073

APPROVALS AND CERTIFICATIONS


- ▀ TUV : DE2-015589
- ▀ UL : E251142-A2
- ▀ FDA : 0820640-xxx rev 004

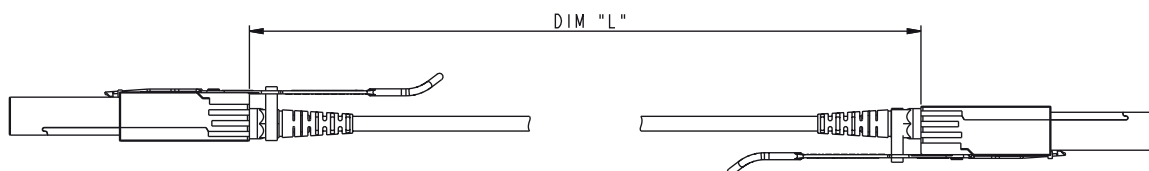

PART NUMBERS

ICD150GVP2410-XX	Straight exit boot
ICD150GVP2430-XX	90 degree exit boot

Suffix XX	Cable Length (m)	Category	Colour
01	1	OM2	Orange
03	3	OM2	Orange
05	5	OM2	Orange
10	10	OM2	Orange
15	15	OM2	Orange
20	20	OM2	Orange
30	30	OM3	Aqua
50	50	OM3	Aqua
C0	100	OM3	Aqua

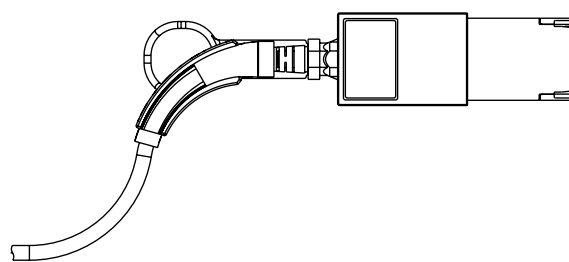

ELXCXP1500612EA4

For more information please contact: elxcommunications@fci.com

www.fciconnect.com/fiberoptics

