

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC AR		DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
		35				H	REV PER ECN BD4386	12-6-90	-
						J	REV PER EC 0020-1041-93	12/01/93	JS
						K	OBS 1--3 PER EC 0020-933-93	03/15/94	DK
						L	OBSOLETE -14	21 AUG 97	JGH
							PER EC 0410-197-96		

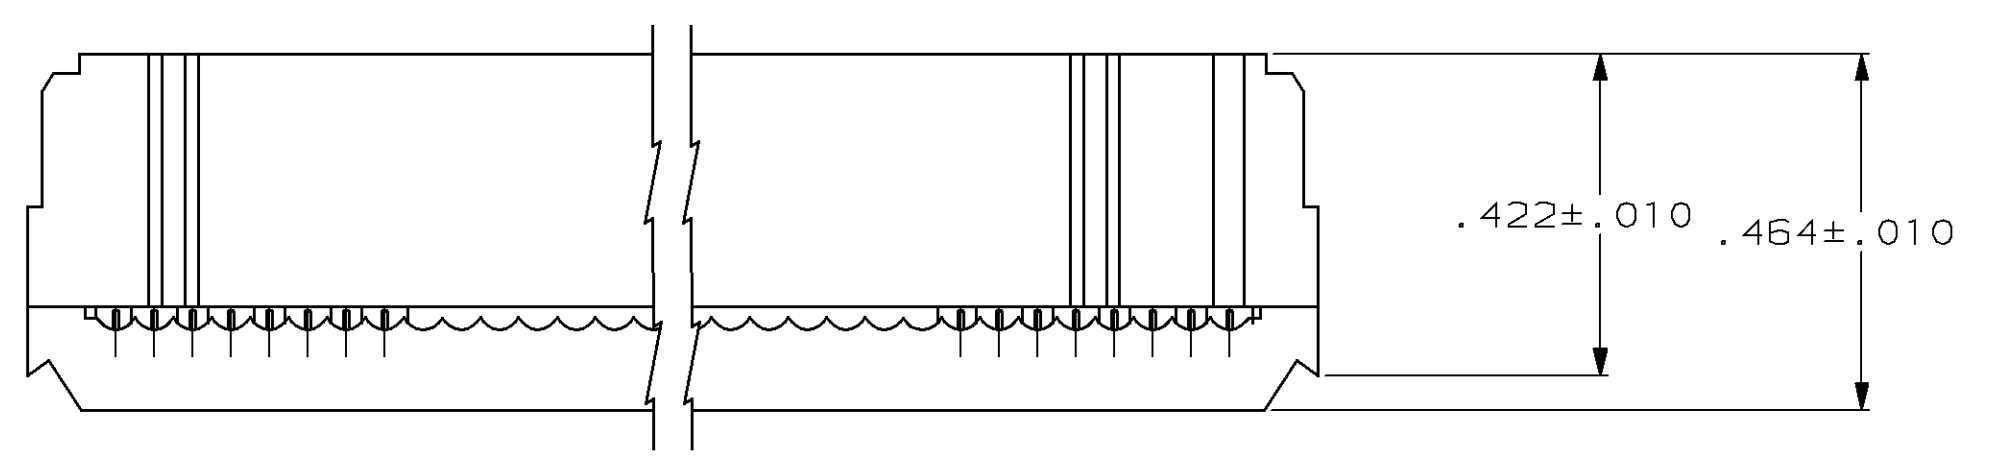

TERMINATED VIEW

- ① UL RATED 94V-0 THERMOPLASTIC, COLOR: BLACK.
- ② PHOSPHOR BRONZE PER QQ-B-750.
- ③ PLATED WITH .000015 GOLD ON LOCALIZED GOLD PLATE AREA, .000100 - .000200 BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
- ④ POLARIZING FEATURE DOES NOT EXIST ON SAME END AS THE POSN #1 INDICATOR ON 10 AND 14 POSN PRODUCT.

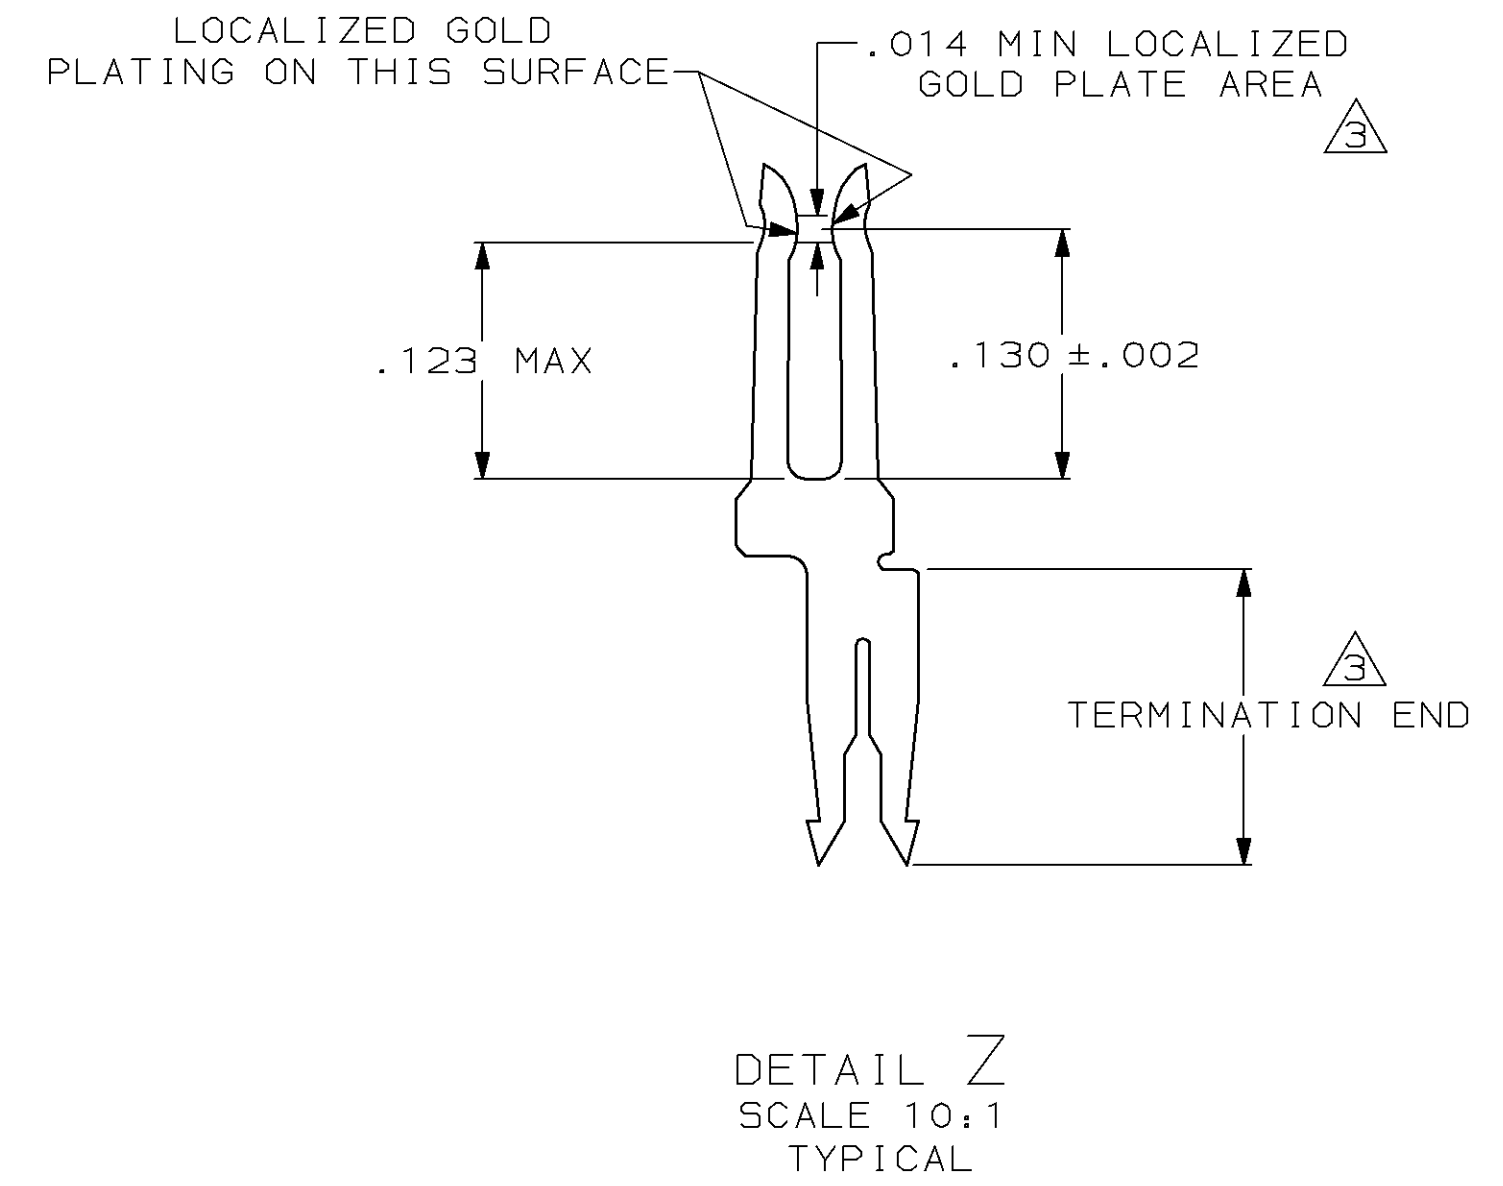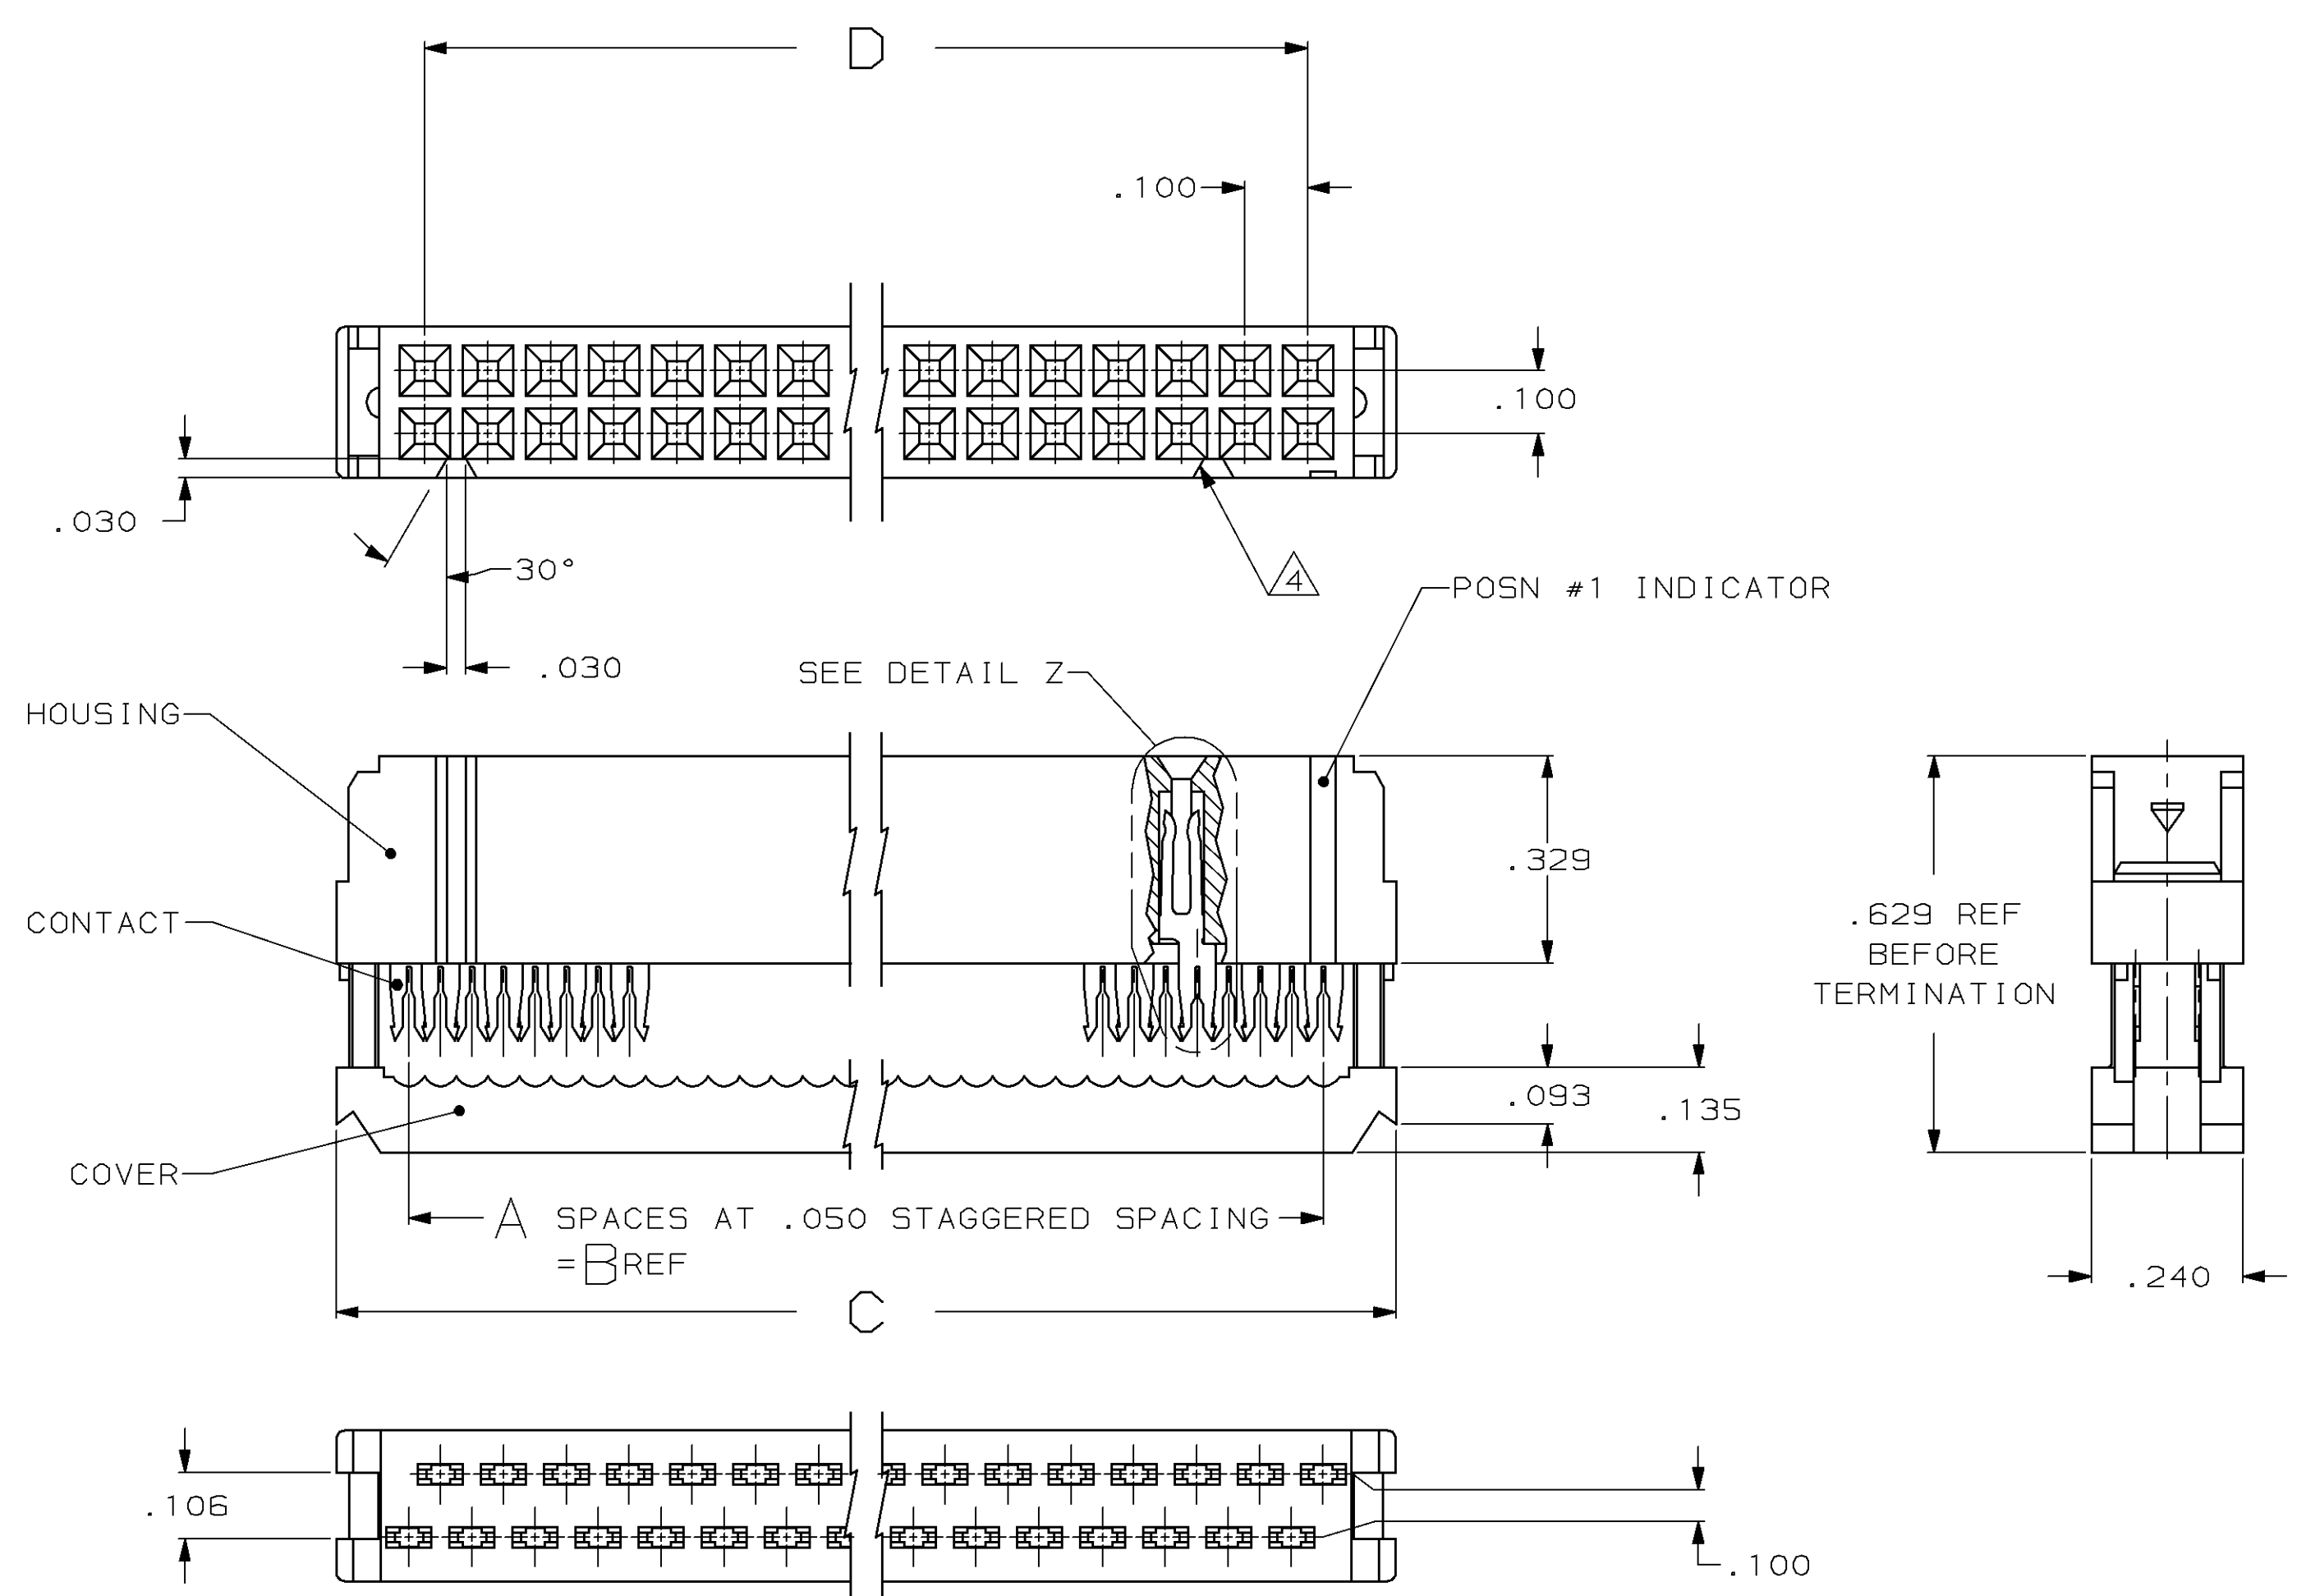

	D	C	B	A	NO OF POSN	PART NUMBER
OBSOLETE	1.700	1.980	1.750	35	36	1-499997-4
OBSOLETE	2.100	2.380	2.150	43	44	1-499997-3
	3.100	3.380	3.150	63	64	1- -2
	2.900	3.180	2.950	59	60	1- -1
	2.400	2.680	2.450	49	50	1- -0
	1.900	2.180	1.950	39	40	-9
	1.600	1.880	1.650	33	34	-8
	1.400	1.680	1.450	29	30	-7
	1.200	1.480	1.250	25	26	-6
	1.100	1.380	1.150	23	24	-5
	.900	1.180	.950	19	20	-4
	.700	.980	.750	15	16	-3
	.600	.880	.650	13	14	-2
	.400	.680	.450	9	10	499997-1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON:		DR J. PEACHEY 2-19-86	AMP INCORPORATED Harrisburg, Pa. 17105	
2 PL DEC ±.005		CHK JAY SAUDER 3-18-86		
3 PL DEC ±.005		APPD JAY SAUDER 3-18-86	NAME RECEPTACLE KIT, AMP-LATCH NOVO,	
ANGLES ±5°		APPD D. HOFFMAN 3-18-86	MIL PLZLN, 15 GOLD DUPLEX	
MATERIAL	PRODUCT SPEC 108-40000	APPLICATION SPEC 114-40005	CONTACTS, W/O STRAIN RLF	
MOLDED PARTS:	SIZE D	WEIGHT -	FSCM NO 00779	DRAWING NO 499997
CONTACTS: ②	SCALE 4:1	SHEET 1 of 1		
CONTACTS: ③	CUSTOMER DRAWING			