

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

NPCAP™-PSE Series

- Super low ESR, high ripple current capability
- Downsized from PSC series (φ8×8L to φ6.3×8L)
- Endurance is longer life than PSC series (5,000 hours at 105°C)
- ESR after endurance is specified within the initial spec
- Rated voltage range : 2.5 to 6.3V_{dc}
- RoHS Compliant
- Halogen Free

Halogen Free
Downsized
Long Life





◆ **SPECIFICATIONS**

Items	Characteristics																						
Category																							
Temperature Range	-55 to +105°C																						
Rated Voltage Range	2.5 to 6.3V _{dc}																						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)																						
Surge Voltage	Rated voltage(V)×1.15 (at 105°C)																						
Leakage Current	I=0.2CV or 500μA, whichever is greater (at 20°C after 2 minutes)																						
*Note Where, I : Leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)																							
Dissipation Factor (tanδ)	0.10 max. (at 20°C, 120Hz)																						
Low Temperature Characteristics (Max.Impedance Ratio)	Z(-25°C)/Z(+20°C)≤1.15 Z(-55°C)/Z(+20°C)≤1.25 (at 100kHz)																						
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C.																						
<table border="1"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤±20% of the initial value</td></tr> <tr><td>D.F. (tanδ)</td><td>≤The initial specified value</td></tr> <tr><td>ESR</td><td>≤The initial specified value</td></tr> <tr><td>Leakage current</td><td>≤The initial specified value</td></tr> </table>		Appearance	No significant damage	Capacitance change	≤±20% of the initial value	D.F. (tanδ)	≤The initial specified value	ESR	≤The initial specified value	Leakage current	≤The initial specified value												
Appearance	No significant damage																						
Capacitance change	≤±20% of the initial value																						
D.F. (tanδ)	≤The initial specified value																						
ESR	≤The initial specified value																						
Leakage current	≤The initial specified value																						
Bias Humidity Test	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to DC voltage at 60°C, 90 to 95% RH for 1,000 hours.																						
<table border="1"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤±20% of the initial value</td></tr> <tr><td>D.F. (tanδ)</td><td>≤The initial specified value</td></tr> <tr><td>ESR</td><td>≤The initial specified value</td></tr> <tr><td>Leakage current</td><td>≤The initial specified value</td></tr> </table>		Appearance	No significant damage	Capacitance change	≤±20% of the initial value	D.F. (tanδ)	≤The initial specified value	ESR	≤The initial specified value	Leakage current	≤The initial specified value												
Appearance	No significant damage																						
Capacitance change	≤±20% of the initial value																						
D.F. (tanδ)	≤The initial specified value																						
ESR	≤The initial specified value																						
Leakage current	≤The initial specified value																						
Surge Voltage Test	The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds.																						
<table border="1"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤±20% of the initial value</td></tr> <tr><td>D.F. (tanδ)</td><td>≤The initial specified value</td></tr> <tr><td>ESR</td><td>≤The initial specified value</td></tr> <tr><td>Leakage current</td><td>≤The initial specified value</td></tr> </table>		Appearance	No significant damage	Capacitance change	≤±20% of the initial value	D.F. (tanδ)	≤The initial specified value	ESR	≤The initial specified value	Leakage current	≤The initial specified value												
Appearance	No significant damage																						
Capacitance change	≤±20% of the initial value																						
D.F. (tanδ)	≤The initial specified value																						
ESR	≤The initial specified value																						
Leakage current	≤The initial specified value																						
Halogen Free (Definition)	All homogeneous materials within a capacitor meet the criteria in Table-1 and Tabel-2. Homogeneous material has uniform composition throughout and cannot be mechanically disjointed into different materials.																						
<table border="1"> <thead> <tr> <th colspan="2">Table-1</th> <th colspan="2">Table-2</th> </tr> <tr> <th>Substance</th> <th>Permissible limit (by weight)</th> <th>Substance</th> <th>Permissible limit (by weight)</th> </tr> </thead> <tbody> <tr> <td>Bromine (Br)</td> <td>≤900ppm (0.09%)</td> <td>Antimony Trioxide (Sb₂O₃)</td> <td>≤1,000ppm (0.10%)</td> </tr> <tr> <td>Chlorine (Cl)</td> <td>≤900ppm (0.09%)</td> <td>Red Phosphorus</td> <td>≤1,000ppm (0.10%)</td> </tr> <tr> <td colspan="2">Total concentration of Chlorine (Cl) + Bromine (Br)</td> <td colspan="2">≤1,500ppm (0.15%)</td> </tr> </tbody> </table>				Table-1		Table-2		Substance	Permissible limit (by weight)	Substance	Permissible limit (by weight)	Bromine (Br)	≤900ppm (0.09%)	Antimony Trioxide (Sb ₂ O ₃)	≤1,000ppm (0.10%)	Chlorine (Cl)	≤900ppm (0.09%)	Red Phosphorus	≤1,000ppm (0.10%)	Total concentration of Chlorine (Cl) + Bromine (Br)		≤1,500ppm (0.15%)	
Table-1		Table-2																					
Substance	Permissible limit (by weight)	Substance	Permissible limit (by weight)																				
Bromine (Br)	≤900ppm (0.09%)	Antimony Trioxide (Sb ₂ O ₃)	≤1,000ppm (0.10%)																				
Chlorine (Cl)	≤900ppm (0.09%)	Red Phosphorus	≤1,000ppm (0.10%)																				
Total concentration of Chlorine (Cl) + Bromine (Br)		≤1,500ppm (0.15%)																					
Failure Rate	0.5% per 1,000 hours maximum (Confidence level 60% at 105°C)																						

*Note : If any doubt arises, measure the leakage current after the following voltage treatment.
Voltage treatment : DC rated voltage is applied to the capacitors for 120 minutes at 105°C.

◆ **DIMENSIONS [mm]**

● Terminal Code : E

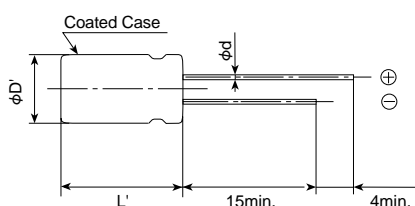

Size code	F08
φD	6.3
φd	0.6
F	2.5
φD'	φD+0.5max.
L'	L+1.5max.

◆ **MARKING**


EX) 2.5V820μF



Specifications in this bulletin are subject to change without notice.

NPCAP™-PSE Series

◆PART NUMBERING SYSTEM

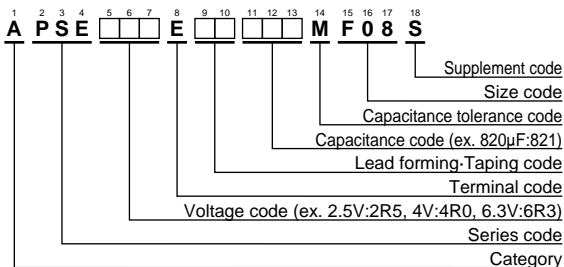

◆STANDARD RATINGS

WV(Vdc)	Cap(μF)	Case size φD×L(mm)	ESR (mΩ max./20°C, 100k to 300kHz)	Rated ripple current (mA _{rms} /105°C, 100kHz)	Part No.
2.5	820	6.3×8	7	5,000	APSE2R5E□□821MF08S
4	560	6.3×8	7	5,000	APSE4R0E□□561MF08S
6.3	470	6.3×8	8	4,700	APSE6R3E□□471MF08S
	560	6.3×8	8	4,700	APSE6R3E□□561MF08S

□□ : Enter the appropriate lead forming or taping code.