

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。



Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

ASSY. P/N: USB-2000-CAX003
 USB-2000-CAX006
 USB-2000-CAX012

"H"= HOST TO HOST
 OR
 "P"= HOST TO PERIPHERAL

LENGTH IN FEET

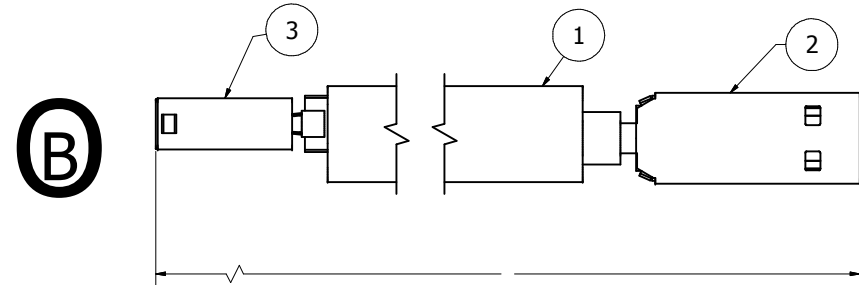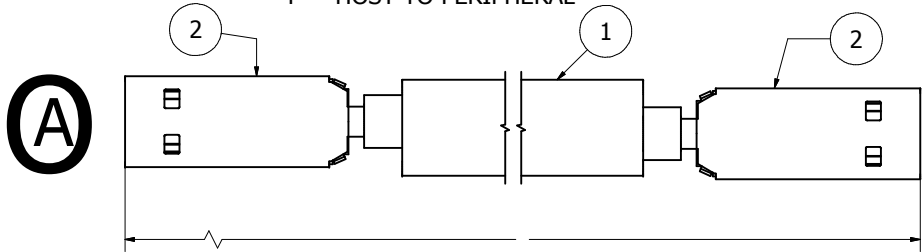

NOTES, UNLESS OTHERWISE SPECIFIED:

- 1 INSTALL CONNECTORS AS REQUIRED
- 2 STRIP AND TIN PER IEC-J-STD-001
- 3 USE STRAIN RELIEF AS REQUIRED
- 4 INSTALL BLACK HEAT SHRINK AS REQUIRED
- 5 CONDUCTORS: ULTRA FLEXIBLE, FINELY STRANDED, TINNED COPPER
- 6 SHIELDING: ULTRA FLEXIBLE, BRAIDED SHIELDS, WITH 90% NOMINAL COVERAGE
- 7 MINIMUM BEND RADIUS: 6X CABLE HEIGHT FOR INTERMEDIATE FLEX; 10X CABLE HEIGHT FOR CONTINUOUS FLEX
- 8 FLEX LIFE: 10,000,000 CYCLES NOMINAL
- 9 OUTER JACKET DUROMETER RATING: 65 (SHORE A)
- 10 TEMPERATURE RATING FOR CABLE: -65°C TO +165°C
 TEMPERATURE RATING FOR FINISHED ASSEMBLIES: -20°C TO +85°C
- 11 OUTER JACKET DIELECTRIC STRENGTH: 450 VOLTS/MILS (17.7 kv/mm)
- 12 * OR EQUIVALENT



CROSS SECTION VIEW OF THE CABLE
 P/N: 579R101
 WIDTH .31"
 HEIGHT .15"


"A" BILL OF MATERIALS, H-H; USB-2000

ITEM	QTY	PART NUMBER	DESCRIPTION
1	A/R	579R101	CICOIL BULK CABLE
2	2	A-USBPA-3-R*	ASSMANN USB TYPE A CONNECTOR
3	A/R	PRODUCTION PREFERENCE	BLACK HEAT SHRINK (-55°C TO +135°C)

"B" BILL OF MATERIALS, H-P; USB-2000-

ITEM	QTY	PART NUMBER	DESCRIPTION
1	A/R	579R101	CICOIL BULK CABLE
2	1	A-USBPA-3-R*	ASSMANN USB TYPE A CONNECTOR
3	1	A-USBPB-2-R*	ASSMANN USB TYPE B CONNECTOR
4	1	PRODUCTION PREFERENCE	BLACK HEAT SHRINK (-55°C TO +135°C)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CICOIL LLC AND ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF EQUIPMENT WITHOUT PERMISSION.



VIEW PROJECTION

DASH NO	QTY REQD	NEXT ASSEMBLY	FINAL ASSEMBLY
APPLICATION			

STANDARD TOLERANCES UNLESS OTHERWISE NOTED
 DIMENSIONS ARE IN INCHES
 .X+/- 0.5
 .XX+/-0.05
 .XXX+/-0.005
 ANGLES +/- 5 DEG [MM]

SIGNATURE	DATE
DRAWN: rruiz	12/4/2012
CHECK: JOHN PALAHNUK	8/21/2013
ENGINEER: JOHN PALAHNUK	8/21/2013

MATERIAL:
 DO NOT SCALE DRAWING



24960 AVENUE TIBBITTS, VALENCIA, CA 91355 www.cicoil.com 661-295-1295

TITLE			
USB CABLE ASSEMBLY			
CAGE CODE	SIZE	DRAWING NUMBER	REVISION
19476		USB-2000-CAXXXX	N/C
SCALE		FILE: USB-2000-CAXXXX (G) 1 of 1	