


## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

3M™ MEDIUM FLEX LIFE FLAT CABLE, HF539  
 .050" 28 AWG STRANDED, MEDIUM FLEX LIFE, HALOGEN FREE PO

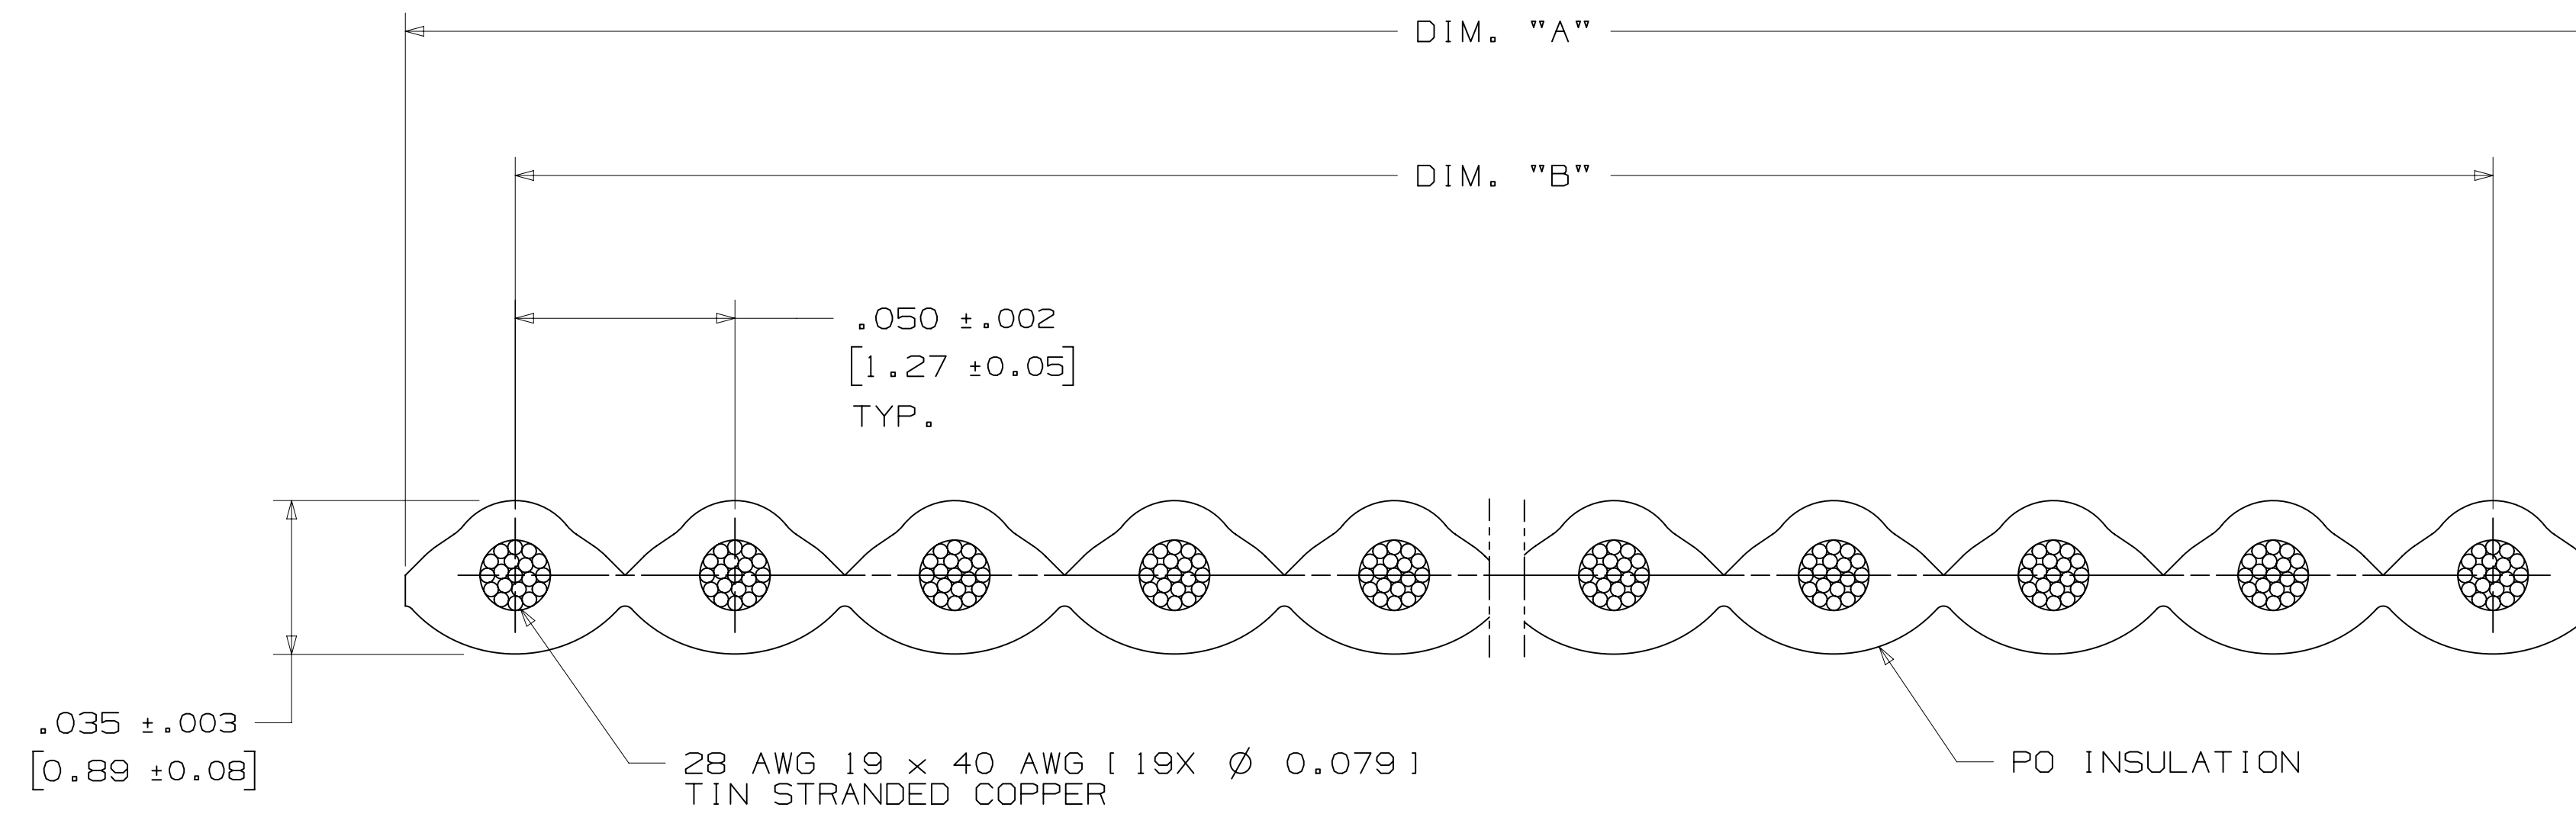

Note: Available in standard 100 ft and 300 ft rolls, please specify when ordering. Contact 3M for availability of additional conductor counts and/or custom roll lengths.

TABLE 1  
 DIMENSION CHART

NUMBER OF CONDUCTORS	3M PART NUMBER	DIMENSION 'A' ± AS NOTED	DIMENSION 'B' (SEE NOTE 2)
6	HF539/06	0.300"±0.010"	0.250"±0.007"
9	HF539/09	0.450"±0.010"	0.400"±0.007"
10	HF539/10	0.500"±0.010"	0.450"±0.007"
14	HF539/14	0.700"±0.010"	0.650"±0.007"
15	HF539/15	0.750"±0.010"	0.700"±0.007"
16	HF539/16	0.800"±0.015"	0.750"±0.011"
20	HF539/20	1.000"±0.015"	0.950"±0.011"
24	HF539/24	1.200"±0.015"	1.150"±0.011"
25	HF539/25	1.250"±0.015"	1.200"±0.011"
26	HF539/26	1.300"±0.015"	1.250"±0.011"
30	HF539/30	1.500"±0.020"	1.450"±0.015"
34	HF539/34	1.700"±0.020"	1.650"±0.015"
36	HF539/36	1.800"±0.020"	1.750"±0.015"
37	HF539/37	1.850"±0.020"	1.800"±0.015"
40	HF539/40	2.000"±0.020"	1.950"±0.015"
50	HF539/50	2.500"±0.020"	2.450"±0.015"
60	HF539/60	3.000"±0.020"	2.950"±0.015"
64	HF539/64	3.200"±0.020"	3.150"±0.015"

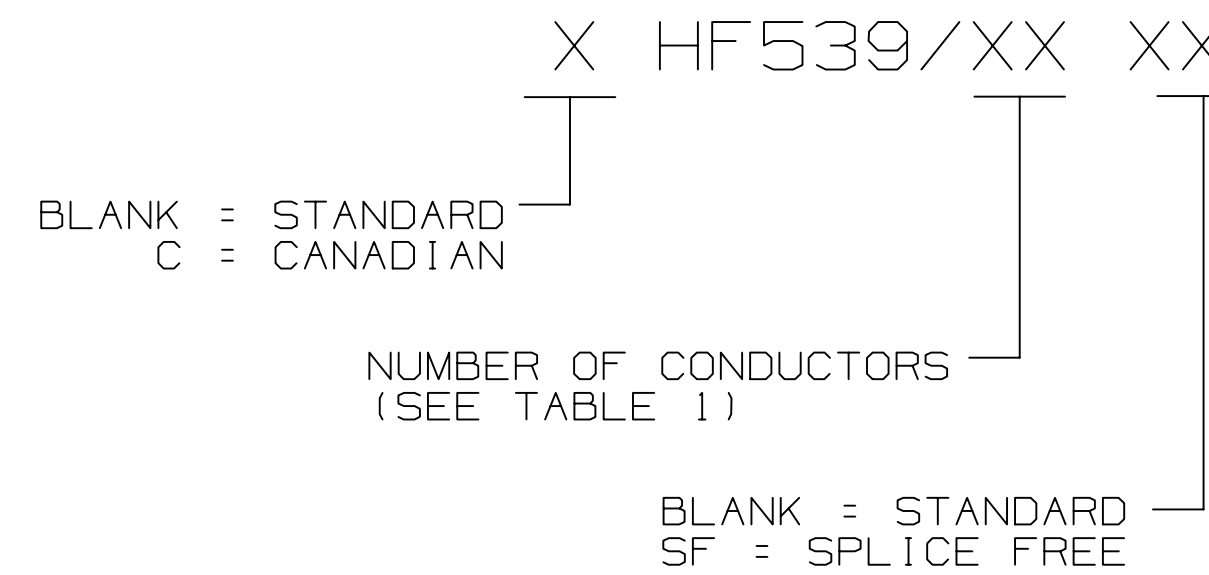


TABLE 2  
 ELECTRICAL CHARACTERISTICS

VOLTAGE RATING	USA: 300V, CANADA: 150V, EU: 50V	
INSULATION RESISTANCE	PRIMARY CABLE >1 X 10 <sup>10</sup> Ω/10 FT [3 m]	
CHARACTERISTIC IMPEDANCE	UNBALANCED	BALANCED
	100 Ω	
CAPACITANCE	15.0 pF/ft [49.2 pF/m]	8.4 pF/ft [27.7 pF/m]
INDUCTANCE	0.15 μH/ft [0.49 μH/m]	0.24 μH/ft [0.79 μH/m]
PROPAGATION DELAY	1.51 ns/ft [4.95 ns/m]	1.42 ns/ft [4.66 ns/m]
VELOCITY OF PROPAGATION	68%	72%

NOTE: UNBALANCED IS MEASURED BETWEEN GROUND-SIGNAL-GROUND CONDUCTORS. BALANCED IS MEASURED WITHIN A PAIR.

ROLLING FLEX CYCLES PER EIA-364-41

RADIUS	MINIMUM CYCLES
1/2"	0.4 MILLION
3/4"	5 MILLION
1 3/4"	10 MILLION

NOTE: REPRESENTS MINIMUM ROLLING FLEX CYCLES AT DATE OF PUBLICATION. ADDITIONAL TESTING IS ONGOING. CABLE CONSTRUCTION AND MATERIAL IS SIMILAR TO 3319 SERIES CABLE WHICH IS RATED TO 100 MILLION CYCLES AT 7/8" RADIUS. SEE TS-0732. CONTACT 3M FOR THE MOST UP-TO-DATE INFORMATION.

- NOTES
1. MATERIAL:  
 A) PRIMARY INSULATION: HALOGEN FREE POLYOLEFIN (PO).  
 B) CONDUCTORS: 28 AWG, 19 X 40 AWG (19 X, Ø 0.079), TINNED STRANDED COPPER.
  2. REGULATORY INFORMATION:  
 ROHS COMPLIANT. SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF WWW.3MCONNECTORS.COM FOR COMPLIANCE INFORMATION (RIA E1 & C1 APPLY).  
 UL FILE NO: E42769,  
 UL STYLE NO: 21682.
  3. MARKINGS:  
 STANDARD: NONE.  
 CANADIAN: SEE "PRINTING ILLUSTRATION" VIEW.  
 PRIMARY CABLE: BLUE MARK ON EDGES DESIGNATES WIRE NUMBER 1.
  4. THE SURFACE DEFINED BY THE "ZIP" PROCESS IS NOT REQUIRED TO BE BLUE.
  5. ENVIRONMENTAL:  
 TEMP RATING: -40°C TO 105°C  
 FLAMABILITY RATING: HORIZONTAL.
  6. HALOGEN FREE IS DEFINED AS BOTH:  
 1) NO HALOGEN COMPOUNDS THAT ARE INTENTIONALLY ADDED TO THE PRODUCT OR USED IN THE MANUFACTURING PROCESS FOR THE PRODUCT.  
 2) ANY IMPURITIES PRESENT ARE LESS THAN 900 ppm BROMINE, LESS THAN 900 ppm CHLORINE AND/OR LESS THAN 1500 ppm TOTAL BROMINE AND CHLORINE. THE LATTER ARE THE LEVELS SET FORTH IN CERTAIN INDUSTRY STANDARDS FOR PRINTED CIRCUIT BOARDS, SUCH AS THE INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC) 61249-2-21 STANDARD. THIS INFORMATION REPRESENTS 3M/S KNOWLEDGE AND BELIEF WHICH MAY BE BASED IN WHOLE OR IN PART ON INFORMATION PROVIDED BY 3RD PARTY SUPPLIERS TO 3M.

3M™ ELECTRONIC SOLUTIONS DIVISION  
 INTERCONNECT SOLUTIONS  
 http://www.3mconnectors.com

3M IS A TRADEMARK OF 3M COMPANY.  
 FOR TECHNICAL, SALES OR ORDERING  
 INFORMATION CALL 800-225-5373

AWM 21682 105°C 300V HOR AWM 1A 105° 150V FT2 EU<50V

"PRINTING ILLUSTRATION"



DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
				NOV 05, 2012		
DIVISION		DIVISION CODE		DATE		
Interconnect Solutions		ISD		NOV 05, 2012		
DO NOT SCALE DRAWING	TOLERANCES EXCEPT AS NOTED	<b>3M</b> St. Paul, MN 55144				
THIRD ANGLE PROJECTION	INCHES	© 3M COPYR [GHT] 2013 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.				
	MILLIMETERS	TITLE				
	0 ±.25	MEDIUM FLEX LIFE FLAT CABLE, .050", 28 AWG, HF539				
	.00 ±.25	CAGE NUMBER	SIZE	DRAWING NO.	REV.	
	.000 ±	D		78-5100-2565-9	A	
	MARKED ONLY	MODEL		SHT 1 OF 1		

178-5100-2565-9 DRAWING NUMBER