## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网,版权归原作者所有。如读者和版权方有任何异议请及时告之,我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译,其目的是协助用户阅读,该译文无法自动跟随原稿更新,同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料,来自厂商的技术支持或者使用者的心得体会等,其内容可能存在描 叙上的差异,建议读者做出适当判断。
- 4.如需与我们联系,请发邮件到marketing@iczoom.com,主题请标有"数据手册"字样。

# **Read Statement**

- 1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
- 2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
- 3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
- 4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".



### **Surface Mount Ceramic Chip Capacitors – Low Profile MLCC**

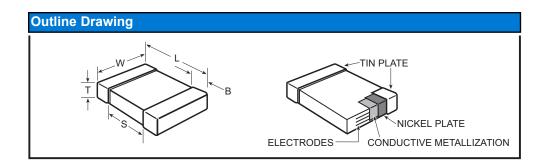

Dimensions – Millimeters (Inches)										
EIA Size Code			W Width	B Bandwidth	S Separation					
0805	2012	2.0 (.079) ± 0.2 (.008)	1.25 (.049) ± 0.2 (.008)	0.5 (.02) ± 0.25 (.010)	-					
1206	3216	3.2 (.126) ± 0.2 (.008)	1.6 (.063) ± 0.2 (.008)	0.5 (.02) ± 0.25 (.010)	-					

See Capacitance Value Table for thickness dimension.

Capacitance Values - X5R Dielectric										
Capacitance Value (μF)	KEMET Part Number	Voltage	Capacitance Tolerance	Thickness	Qty 7" Reel					
4.7	C0805L475( <u>1</u> )9PAC	6.3	±10%, ±20%	0.85 (.033) ± 0.1 (.004)	4,000					
10.0	C0805L106( <u>1</u> )9PAC	6.3	±10%, ±20%	0.85 (.033) ± 0.1 (.004)	4,000					
10.0	C0805L106( <u>1</u> )8PAC	10	±10%, ±20%	0.85 (.033) ± 0.1 (.004)	4,000					
1.0	C1206L105(1)3PAC	25	±10%, ±20%	0.78 (.031) ± 0.1 (.004)	4,000					
4.7	C1206L475(1)4PAC	16	±10%, ±20%	0.90 (.035) ± 0.1(.004)	4,000					


<sup>(1)</sup> To complete KEMET part number insert K for ±10% or M for ±20% capacitance tolerance.

Capacitance Values - X7R Dielectric										
Capacitance Value (μF)	KEMET Part Number	Voltage	Capacitance Tolerance	Thickness	Qty 7" Reel					
1.0	C0805L105( <u>1</u> )8RAC	10	±10%, ±20%	0.78 (.031) ± 0.1 (.004)	4,000					

<sup>(1)</sup> To complete KEMET part number insert K for ±10% or M for ±20% capacitance tolerance.



#### **Capacitor Ordering Information**

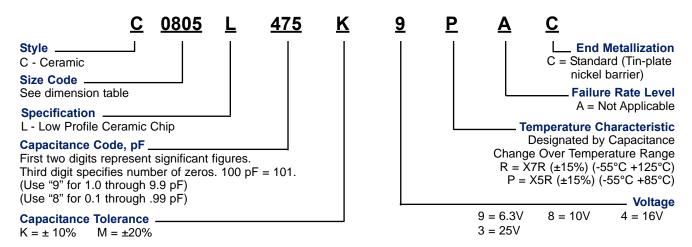

#### **Electrical Parameters - X5R Dielectric**

As detailed in the KEMET Surface Mount Catalog F3102 for X5R, with following specific requirements based on room temperature (25°C) parameters:

- Operating Range: -55°C to +85°C, with no-bias capacitance shift limited to ± 15% over that range.
- Insulation Resistance (IR) measured after 2 minutes at rated voltage @ 25°C: Limit is 500 megohm microfarads or 10000MΩ, whichever is less.
- Capacitance and Dissipation Factor (DF) measured at the following conditions. DF Limit is 10%.
  1 kHz and 1 Vrms.

#### **Electrical Parameters - X7R Dielectric**

As detailed in the KEMET Surface Mount Catalog F3102 for X7R, with following specific requirements based on room temperature (25°C) parameters:

- Operating Range: -55°C to +125°C, with no-bias capacitance shift limited to ± 15% over that range.
- Insulation Resistance (IR) measured after 2 minutes at rated voltage @ 25°C: Limit is 500 megohm microfarads or 10000MΩ, whichever is less.
- Capacitance and Dissipation Factor (DF) measured at the following conditions. DF Limit is 5%.
  1 kHz and 1 Vrms.

#### **Soldering Process**

These components are suitable for reflow only. All parts incorporate the standard KEMET barrier layer of pure nickel, with an overplate of pure tin to provide excellent solderability as well as resistance to leaching.

#### Marking

These chips will be supplied unmarked.

In general, the information in the KEMET Surface Mount catalog F3102 applies to these capacitors. The information in this bulletin supplements that in the catalog.