

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

### Multilayer Ceramic Capacitors (Wide-width Type)

Series: **ECY**



#### ■ Features

- Low ESL
- Ideal for High-speed MPU power supply stability and noise filtering
- RoHS compliant

#### ■ Recommended Applications

- Stabilizes power supply voltage for High-speed MPU and noise filtering circuitry.


#### ■ Handling Precautions

See Page 48 to 53


#### ■ Packaging Specifications

See Page 45, 46, 56

#### ■ Explanation of Part Numbers

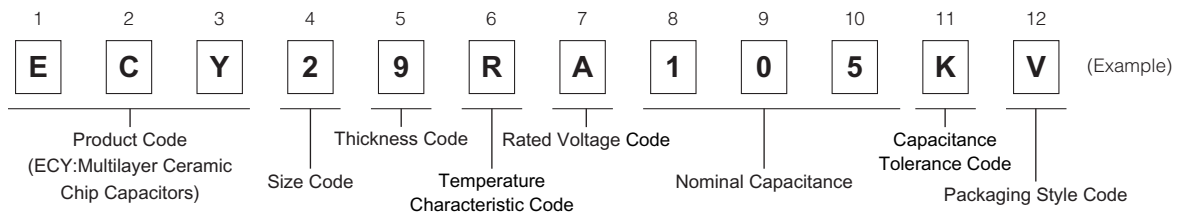


#### ■ Construction



No	Name	
①	Ceramic dielectric	
②	Internal electrode	
③	Terminal electrode	Substrate electrode
④		Intermediate electrode
⑤		External electrode

#### ■ Dimensions in mm (not to scale)



Size Code	Size (EIA)	L	W	T	L <sub>1</sub> , L <sub>2</sub>
2	0508	1.25±0.10	2.0±0.1	0.85±0.10	0.3±0.2
3	0612	1.60±0.15	3.20±0.15	0.85±0.10	0.3±0.2
		1.6±0.2	3.2±0.2		

#### ■ Packaging Styles and standard Packaging Quantity

Quantity : pcs. / reel

Packaging Style Code	Packaging Styles	Size	Quantity
V	180 reel Paper taping (Pitch : 4 mm)	0508	4,000
			0612

#### ■ Temperature Characteristics

- Class 2

Temperature Characteristic Code	Temperature Characteristics	Capacitance Change	Measurement Temperature Range	Reference Temperature
R	X5R	±15 %	-55 to 85 °C	25 °C

#### ■ Rated Voltage

Rated Voltage Code	H	E	C	A	J
Rated Voltage	DC 50 V	DC 25 V	DC 16 V	DC 10 V	DC 6.3 V

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

01 Dec. 2008

### ■ Nominal Capacitance

Ex.	103	104	105	106
Nominal capacitance	10,000 pF (0.01 μF)	100,000 pF (0.1 μF)	1,000,000 pF (1 μF)	10,000,000 pF (10 μF)

### ■ Capacitance Tolerance

Class	Temperature Characteristics	Capacitance Tolerance Code	Capacitance Tolerance
2	X5R	K	±10 %
		M	±20 %

### ■ Specifications and Testing Methods

Item	Specification	Test Method
Operating Temperature Range	-55 to 85 °C	—
Dielectric Withstanding Voltage	No dielectric breakdown and/or damage	Test voltage: Rated voltage × 250 % Duration: 1 to 5 s. Charge/discharge current: 50 mA max.
Insulation Resistance (IR)	10000 MΩ or 500/C(MΩ) whichever is less. Note:100/C (MΩ) min. for DC 10 V max. C:Nominal Cap. in μF	Measuring voltage: Rated voltage Duration: 60 ± 5 s Charge/discharge current: 50 mA max.
Capacitance	Within the specified tolerance	Measuring temperature: 20±2 °C
Dissipation Factor (tan δ)	DC 50 V, DC 25 V, and DC 16 V: 0.025 max. DC 10 V: 0.05 max. DC 6.3 V: 0.15 max.	Preconditioning: The capacitors shall be kept in temperature of 150 +0/-10 °C for 1 hour and subjected to standard condition* 48±4 hours before initial measurement.
		Measuring frequency: 1 KHz ± 10%
		Measuring voltage: 1.0 ± 0.2 Vrms

\*Standard condition : Temperature 15 to 35 °C, Relative humidity 45 to 75 %  
For further information, see the technical specifications.

### ■ Standard Products for EIA Size "0508", Taped Version

- Class 2
- ◆ Temperature Characteristic Code : R (Temperature Characteristics : X5R)

Rated Voltage		DC 50 V			DC 25 V			DC 10 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R
0.01	±10 % (K)	ECY29RH103□V	0.85	○						
0.1	or				ECY29RE104□V	0.85	○			
1	±20 % (M)							ECY29RA105□V	0.85	○

□: Capacitance tolerance code : "□" for "K" or "M"  
Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm): 4,000 pcs./reel  
Avoid flow soldering.

### ■ Standard Products for EIA Size "0612", Taped Version


- Class 2
- ◆ Temperature Characteristic Code : R (Temperature Characteristics : X5R)

Rated Voltage		DC 50 V			DC 16 V			DC 6.3 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R
0.1	±10 % (K)	ECY39RH104□V	0.85	○						
1	or				ECY39RC105□V	0.85	○			
10	±20 % (M)							ECY39RJ106MV	0.85*	○

□: Capacitance tolerance code : "□" for "K" or "M"  
Dimensional tolerance of L, W, T: L, W: ± 0.15 mm / T: ± 0.1 mm for no mark, L, W: ± 0.2 mm / T: ± 0.1 mm for "\*" mark  
Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm): 4,000 pcs./reel  
Avoid flow soldering.

### ■ Impedance/ESL-Frequency [Ex.]

Size 0612, Temperature Characteristics X5R, 1 μF

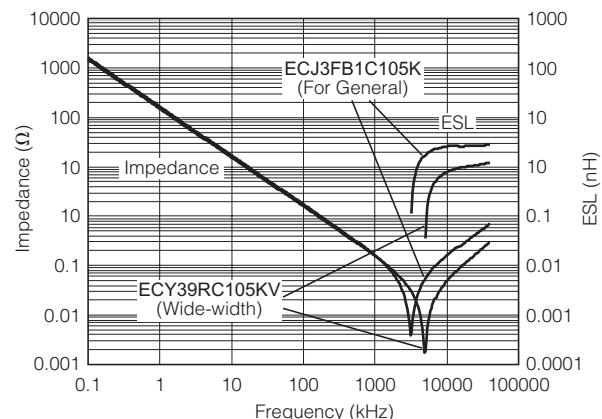

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.