

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# Mid-high Voltage Ceramic Capacitors(Disk with Lead) General Use CK45 Series

Conformity to RoHS Directive

## SHAPES AND DIMENSIONS

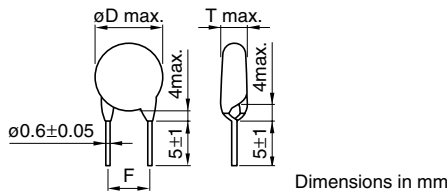

## CAPACITANCE TEMPERATURE CHARACTERISTICS AND TOLERANCE

Temperature characteristics	Temperature range	Capacitance tolerance
B(±10%)	-25 to +85°C	K(±10%)
E(+20, -55%)	-25 to +85°C	Z(+80, -20%)

## CAPACITANCE AND DIMENSIONS

### TEMPERATURE CHARACTERISTICS: B(±10%)

#### RATED VOLTAGE Edc: 1kV

Part No.	Capacitance (pF)	Dimensions (mm)		
		øD max.	T max.	F
CK45-B3AD101KYNN to CK45-B3AD681KYNN	100*, 120, 150*	5.5	5	5±1.5
	180, 220*, 270			
	330*, 390, 470*			
	560, 680*			
CK45-B3AD821KYNN	820	6	5	5±1.5
CK45-B3AD102KYNN	1,000*	6	5	5±1.5
CK45-B3AD122KYNN	1,200	6.5	5	5±1.5
CK45-B3AD152KYNN	1,500*	7	5	5±1.5
CK45-B3AD182KYNN	1,800	7.5	5	5±1.5
CK45-B3AD222KYNN	2,200*	8.5	5	5±1.5
CK45-B3AD272KYNN	2,700	9	5	5±1.5
CK45-B3AD332KYNN	3,300*	9.5	5	5±1.5
CK45-B3AD392KYNN	3,900	10	5	5±1.5
CK45-B3AD472KYNN	4,700*	11	5	5±1.5
CK45-B3AD562KYNN	5,600	12	5	7.5±1.5
CK45-B3AD682KYNN	6,800*	13	5	7.5±1.5
CK45-B3AD822KYNN	8,200	14	5	7.5±1.5
CK45-B3AD103KYNN	10,000*	15	5	7.5±1.5

#### RATED VOLTAGE Edc: 2kV

Part No.	Capacitance (pF)	Dimensions (mm)		
		øD max.	T max.	F
CK45-B3DD101KYNN to CK45-B3DD471KYNN	100*, 120, 150*	5.5	5	5±1.5
	180, 220*, 270			
	330*, 470*			
CK45-B3DD561KYNN	560	6	5	5±1.5
CK45-B3DD681KYNN	680*	6.5	5	5±1.5
CK45-B3DD821KYNN	820	7	5	5±1.5
CK45-B3DD102KYNN	1,000*	7.5	5	5±1.5
CK45-B3DD122KYNN	1,200	8	5	5±1.5
CK45-B3DD152KYNN	1,500*	8.5	5	5±1.5
CK45-B3DD182KYNN	1,800	9	5	5±1.5
CK45-B3DD222KYNN	2,200*	10	5	5±1.5
CK45-B3DD272KYNN	2,700	10.5	5	5±1.5
CK45-B3DD332KYNN	3,300*	11.5	5	7.5±1.5
CK45-B3DD392KYNN	3,900	12.5	5	7.5±1.5
CK45-B3DD472KYNN	4,700*	14	5	7.5±1.5

\* 1kV and 2kV are E6 series standard products in Temperature characteristics B.

#### RATED VOLTAGE Edc: 3kV

Part No.	Capacitance (pF)	Dimensions (mm)		
		øD max.	T max.	F
CK45-B3FD101KYNN	100	5.5	6	7.5±1.5
CK45-B3FD121KYNN	120	5.5	6	7.5±1.5
CK45-B3FD151KYNN	150	5.5	6	7.5±1.5
CK45-B3FD181KYNN	180	5.5	6	7.5±1.5
CK45-B3FD221KYNN	220	5.5	6	7.5±1.5
CK45-B3FD271KYNN	270	6	6	7.5±1.5
CK45-B3FD331KYNN	330	6.5	6	7.5±1.5
CK45-B3FD391KYNN	390	6.5	6	7.5±1.5
CK45-B3FD471KYNN	470	7	6	7.5±1.5
CK45-B3FD561KYNN	560	7.5	6	7.5±1.5
CK45-B3FD681KYNN	680	8	6	7.5±1.5
CK45-B3FD821KYNN	820	8.5	6	7.5±1.5
CK45-B3FD102KYNN	1,000	9	6	7.5±1.5
CK45-B3FD122KYNN	1,200	9.5	6	7.5±1.5
CK45-B3FD152KYNN	1,500	10.5	6	7.5±1.5
CK45-B3FD182KYNN	1,800	11.5	6	7.5±1.5
CK45-B3FD222KYNN	2,200	12.5	6	7.5±1.5
CK45-B3FD272KYNN	2,700	13.5	6	7.5±1.5
CK45-B3FD332KYNN	3,300	14.5	6	7.5±1.5

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

## CAPACITANCE AND DIMENSIONS

### TEMPERATURE CHARACTERISTICS: E(+20, -55%)

RATED VOLTAGE E<sub>dc</sub>: 1kV

Part No.	Capacitance (pF)	Dimensions (mm)		
		øD max.	T max.	F
CK45-E3AD471ZYNN	470*	5.5	5	5±1.5
CK45-E3AD681ZYNN	680	5.5	5	5±1.5
CK45-E3AD102ZYNN	1,000*	5.5	5	5±1.5
CK45-E3AD152ZYNN	1,500	5.5	5	5±1.5
CK45-E3AD222ZYNN	2,200*	6.5	5	5±1.5
CK45-E3AD332ZYNN	3,300	7.5	5	5±1.5
CK45-E3AD472ZYNN	4,700*	8.5	5	5±1.5
CK45-E3AD682ZYNN	6,800	10	5	5±1.5
CK45-E3AD103ZYNN	10,000*	11.5	5	7.5±1.5

RATED VOLTAGE E<sub>dc</sub>: 2kV

Part No.	Capacitance (pF)	Dimensions (mm)		
		øD max.	T max.	F
CK45-E3DD471ZYNN	470*	5.5	5	5±1.5
CK45-E3DD681ZYNN	680	5.5	5	5±1.5
CK45-E3DD102ZYNN	1,000*	6	5	5±1.5
CK45-E3DD152ZYNN	1,500	7	5	5±1.5
CK45-E3DD222ZYNN	2,200*	8	5	5±1.5
CK45-E3DD332ZYNN	3,300	9	5	5±1.5
CK45-E3DD472ZYNN	4,700*	10.5	5	5±1.5
CK45-E3DD682ZYNN	6,800	12.5	5	7.5±1.5
CK45-E3DD103ZYNN	10,000*	14.5	5	7.5±1.5

\* 1kV and 2kV are E3 series standard products in Temperature characteristics E.

RATED VOLTAGE E<sub>dc</sub>: 3kV

Part No.	Capacitance (pF)	Dimensions (mm)		
		øD max.	T max.	F
CK45-E3FD471ZYNN	470	6	6	7.5±1.5
CK45-E3FD681ZYNN	680	6.5	6	7.5±1.5
CK45-E3FD102ZYNN	1,000	7.5	6	7.5±1.5
CK45-E3FD152ZYNN	1,500	8.5	6	7.5±1.5
CK45-E3FD222ZYNN	2,200	9.5	6	7.5±1.5
CK45-E3FD332ZYNN	3,300	11.5	6	7.5±1.5
CK45-E3FD472ZYNN	4,700	12.5	6	7.5±1.5
CK45-E3FD682ZYNN	6,800	15	6	7.5±1.5
CK45-E3FD103ZYNN	10,000	17.5	6	10±2

• For more information about products with other capacitance or other data, please contact us.

• All specifications are subject to change without notice.