

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .



METAL CAP TYPE MULTILAYER CERAMIC CAPACITORS

THP Series / TMP Series (High Reliability)

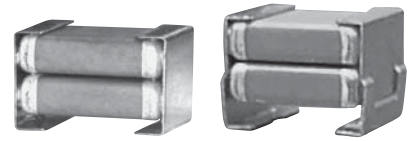

◆FEATURES

1. Small size and large capacitance, high ripple current.
2. Excellent temperature cycle durability and most suitable for aluminum substrate.
3. Y5U temperature characteristics.
4. Excellent noise absorption.
5. For reflow soldering use.
6. Suitable for aluminum substrate.


◆APPLICATIONS

1. Smoothing circuit of switching mode AC-DC or DC-DC converter.
2. On-board power supply.
3. Noise suppressor for various kinds of equipments.

◆CUSTOM MADE PRODUCTS

We can offer custom made one element metal cap type capacitors for request of customers. Please contact us if you have questions for details.

◆CONSTRUCTION

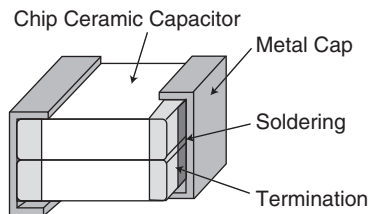

◆RATINGS

1. Category Temperature Range	-55~+125°C
2. Rated Voltage Range	25, 50, 100, 200V _{dc}
3. Rated Capacitance Range	0.45 to 100μF
4. Rated Capacitance Tolerance	M(±20%), Z(±20%)
5. Temperature Characteristics	E(JIS)≒Y5U(EIA)
6. Rated Ripple Current	See No.5 on the following table

◆SPECIFICATIONS

No.	Items	Specification	Test Condition								
1	Withstand Voltage	No abnormality.	250% of rated voltage shall be applied for 5 seconds.								
2	Insulation Resistance	1000/C _R (MΩ) or 10000(MΩ) whichever is less.	Rated voltage shall be applied for 60±5 seconds at temperature 20±2°C.								
3	Rated Capacitance	Within specified tolerance.	Temperature : 20±2°C Frequency : 1±0.1kHz (≥100μF, 120Hz) Voltage : 1±0.2V _{rms}								
4	Dissipation Factor	5.0% maximum	Temperature : 20±2°C Frequency : 1±0.1kHz (≥100μF, 120Hz) Voltage : 1±0.2V _{rms}								
5	Rated Ripple Current	<table border="1"> <tr> <td>Size</td> <td>43</td> <td>55</td> <td>76</td> </tr> <tr> <td>Arms</td> <td>1.5</td> <td>3.0</td> <td>4.0</td> </tr> </table>	Size	43	55	76	Arms	1.5	3.0	4.0	10kHz~1MHz (sine curve) Ripple voltage V _p shall be less than the rated voltage.
Size	43	55	76								
Arms	1.5	3.0	4.0								

※ This series is no more RoHS compliant as from January,2013.
NTJ series are recommended for the new design and the substitution.


◆SPECIFICATIONS

No.	Items	Specification	Test Condition															
6	Temperature Cycle	Appearance : No visible damage. $\Delta C/C : \pm 15\%$ D.F. : To meet the initial specification. I.R. : To meet the initial specification.	<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. Category temperature ± 3</td> <td>30\pm3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>3 max.</td> </tr> <tr> <td>3</td> <td>Max. Category temperature ± 3</td> <td>30\pm3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>3 max.</td> </tr> </tbody> </table> <Cycle> THP series : 100 cycles TMP series : 500 cycles	Step	Temperature (°C)	(min.)	1	Min. Category temperature ± 3	30 \pm 3	2	Room temperature	3 max.	3	Max. Category temperature ± 3	30 \pm 3	4	Room temperature	3 max.
Step	Temperature (°C)	(min.)																
1	Min. Category temperature ± 3	30 \pm 3																
2	Room temperature	3 max.																
3	Max. Category temperature ± 3	30 \pm 3																
4	Room temperature	3 max.																
7	Humidity Load Life	Appearance : No abnormality. $\Delta C/C : \pm 20\%$ D.F. : 7% max. I.R. : 50/C _R (M Ω) or 1000(M Ω) whichever is less.	Temperature : 40 \pm 2°C Humidity : 90 to 95%RH Voltage : Rated voltage Time : 500 \pm ²⁴ ₀ hours															
8	Endurance	Appearance : No abnormality. $\Delta C/C : \pm 20\%$ D.F. : 7% max. I.R. : 100/C _R (M Ω) or 1000(M Ω) whichever is less.	<table border="1"> <tbody> <tr> <td>Temperature : 85\pm2°C Voltage : 200% of rated voltage. Time : 1000\pm⁴⁸₀hours</td> </tr> <tr> <td>Temperature : 125\pm3°C Voltage : Rated voltage Time : 1000\pm⁴⁸₀hours</td> </tr> </tbody> </table>	Temperature : 85 \pm 2°C Voltage : 200% of rated voltage. Time : 1000 \pm ⁴⁸ ₀ hours	Temperature : 125 \pm 3°C Voltage : Rated voltage Time : 1000 \pm ⁴⁸ ₀ hours													
Temperature : 85 \pm 2°C Voltage : 200% of rated voltage. Time : 1000 \pm ⁴⁸ ₀ hours																		
Temperature : 125 \pm 3°C Voltage : Rated voltage Time : 1000 \pm ⁴⁸ ₀ hours																		

*C_R : Rated Capacitance(μ F)

◆Note of mountig for THP series.


1. The face of wider gap between a capacitor and a substrate shall be the mounting face.
2. To prevent degradation of temperature cycling capability, if need to be careful about amount of solder that would not go into the inner side of terminations.

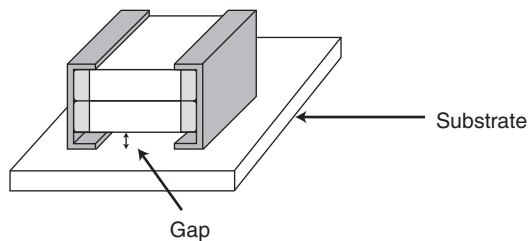


◆STANDARD RATINGS

Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Maximum ripple current (Arms)	Part Number	Previous Part Number (Just for your reference)
		L	W	Tmax.	a			
25	15	4.8±0.4	3.5±0.3	5.5	1.3±0.3	1.5	KHP250E156M435AT00	THP50E1E156MT502
	20			4.5	1.3±0.3		KHP250E206M435AT00	THP50E1E206MT502
	33						KHP250E336M555AT00	THP60E1E336MT502
	47	6.0±0.4	5.0±0.4	5.6	1.5±0.3	3.0	KHP250E476M555AT00	THP60E1E476MT502
	68			KHP250E686M555AT00			THP60E1E686MT502	
	100			KHP250E107M765BT00			THP70E1E107MT502	
50	4.5	4.8±0.4	3.5±0.3	5.5	1.3±0.3	1.5	KHP500E455M435AT00	THP50E1H455MT502
	6.8			4.5	1.3±0.3		KHP500E685M435AT00	THP50E1H685MT502
	10						KHP500E106M555AT00	THP60E1H106MT502
	15	6.0±0.4	5.0±0.4	5.6	1.5±0.3	3.0	KHP500E156M555AT00	THP60E1H156MT502
	22			KHP500E226M555AT00			THP60E1H226MT502	
	33			KHP500E336M765BT00			THP70E1H336MT502	
	47	7.8±0.5	6.6±0.5	6.5	1.5±0.3	4.0	KHP500E476M765BT00	THP70E1H476MT502
	100	1.5	4.8±0.4	3.5±0.3	5.5	1.3±0.3	1.5	KHP101E155M435AT00
2.0		4.5			1.3±0.3	KHP101E205M435AT00		THP50E2A205MT502
3.0						KHP101E305M435AT00		THP50E2A305MT502
4.7		6.0±0.4	5.0±0.4	5.6	1.5±0.3	3.0	KHP101E475M555AT00	THP60E2A475MT502
6.8				KHP101E685M555AT00			THP60E2A685MT502	
10				KHP101E106M555AT00			THP60E2A106MT502	
15		7.8±0.5	6.6±0.5	6.5	1.5±0.3	4.0	KHP101E156M765BT00	THP70E2A156MT502
200		0.45	4.8±0.4	3.5±0.3	5.5	1.3±0.3	1.5	KHP201E454M435AT00
	0.68	4.5			1.3±0.3	KHP201E684M435AT00		THP50E2D684MT502
	1.0					KHP201E105M435AT00		THP50E2D105MT502
	1.5	6.0±0.4	5.0±0.4	5.6	1.5±0.3	3.0	KHP201E155M555AT00	THP60E2D155MT502
	2.2			KHP201E225M555AT00			THP60E2D225MT502	
	3.3			KHP201E335M765BT00			THP70E2D335MT502	
	4.7	7.8±0.5	6.6±0.5	6.5	1.5±0.3	4.0	KHP201E475M765BT00	THP70E2D475MT502

◆PART NUMBERING SYSTEM

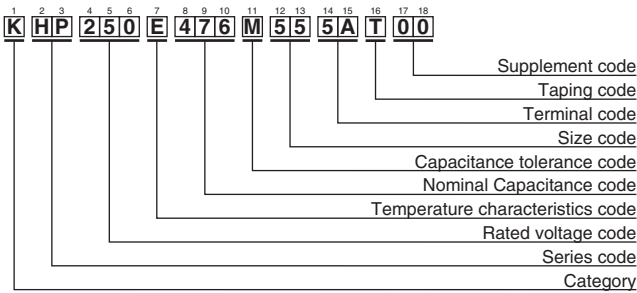

◆DIMENSIONS

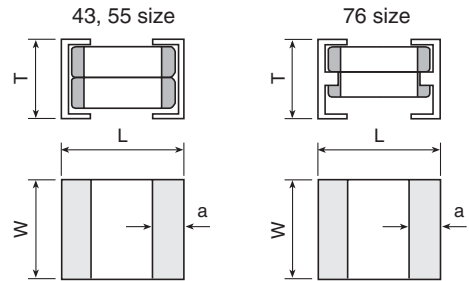


Please refer to "Part Numbering System" of the beginning of a catalog for the details.


◆STANDARD RATINGS

Rated voltage (Vdc)	Rated Capacitance (μ F)	Dimensions(mm)				Maximum ripple current (Arms)	Part Number	Previous Part Number (Just for your reference)
		L	W	Tmax.	a			
25	33	6.4 \pm 0.4	5.0 \pm 0.4	5.0	1.3 \pm 0.3	3.0	KMP250E336M555ET00	TMP60E1E336MT502
	47						KMP250E476M555ET00	TMP60E1E476MT502
	68	8.2 \pm 0.5	6.6 \pm 0.5	6.5	1.5 ν 0.3	4.0	KMP250E686M765ET00	TMP70E1E686MT502
	100						KMP250E107M765ET00	TMP70E1E107MT502
50	10	6.4 \pm 0.4	5.0 \pm 0.4	5.0	1.3 \pm 0.3	3.0	KMP500E106M555ET00	TMP60E1H106MT502
	15						KMP500E156M555ET00	TMP60E1H156MT502
	22						KMP500E226M555ET00	TMP60E1H226MT502
	33	8.2 \pm 0.5	6.6 \pm 0.5	6.5	1.5 \pm 0.3	4.0	KMP500E336M765ET00	TMP70E1H336MT502
	47						KMP500E476M765ET00	TMP70E1H476MT502
	100						KMP101E106M765ET00	TMP60E2A106MT502
100	4.7	6.4 \pm 0.4	5.0 \pm 0.4	5.0	1.3 \pm 0.3	3.0	KMP101E475M555ET00	TMP60E2A475MT502
	6.8						KMP101E685M555ET00	TMP60E2A685MT502
	10	8.2 \pm 0.5	6.6 \pm 0.5	6.5	1.5 \pm 0.3	4.0	KMP101E106M765ET00	TMP70E2A106MT502
	15						KMP101E156M765ET00	TMP70E2A156MT502
200	1.5	6.4 \pm 0.4	5.0 \pm 0.4	5.0	1.3 \pm 0.3	3.0	KMP201E155M555ET00	TMP60E2D155MT502
	2.2						KMP201E225M555ET00	TMP60E2D225MT502
	3.3	8.2 \pm 0.5	6.6 \pm 0.5	6.5	1.5 \pm 0.3	4.0	KMP201E335M765ET00	TMP70E2D335MT502
	4.7						KMP201E475M765ET00	TMP70E2D475MT502

◆PART NUMBERING SYSTEM

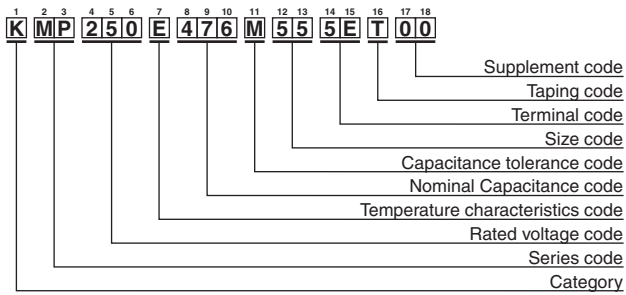

◆DIMENSIONS

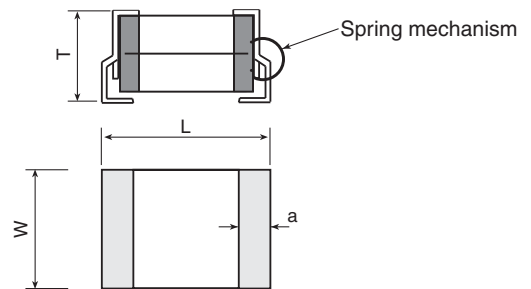

Please refer to "Part Numbering System" of the beginning of a catalog for the details.