


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

POLYACENE CAPACITORS

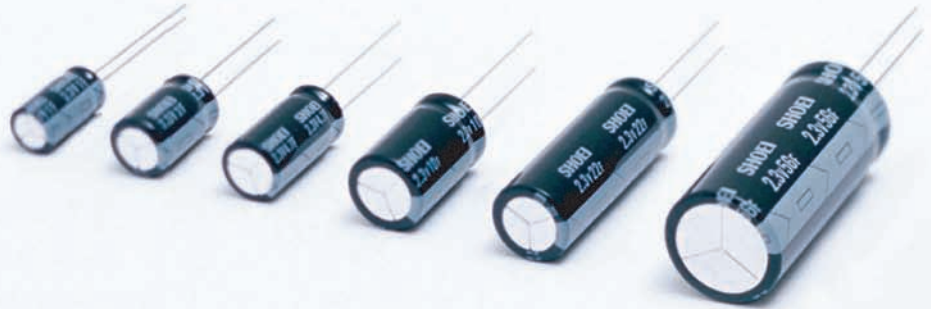

PAS (Polyacenic Semiconductor), which has been originally developed by Shoei Electronics, is a kind of conductive polymers synthesized through pyrolytic treatment of phenolic resin. PAS capacitors, in which PAS is employed for both positive and negative electrodes, show extremely high performance. PAS capacitors are volume ratio 1/2-1/3 smaller than conventional electric double layer capacitors. In addition, its low internal resistance enables to quick charge and large current discharge. High capacitance type (LA series) is suitable for main power supply of electric accumulator of solar cell, cordless devices and toys. Low ESR type (LR series) is mainly for assistant power supply to lengthen life-time of main power supply and so on.

Features

High capacitance

PAS can store a large number of ions into its amorphous structure (doping), therefore PAS capacitor has much larger capacitance than conventional electric double layer capacitors.

Quick Charge & Discharge

Low internal resistance and quick charge is possible with ampere measure.

High reliability

Possible to charge/discharge more than 100,000 times with less deterioration caused by charging/discharging compared to secondary battery, which involve chemical reaction, and enable to more than 100,000 times charge/ discharge and large excellence of durability for over charge/discharge.


Environmentally friendly

PAS capacitor is environmentally friendly power source, which does not contain any heavy metals such as Cd and Hg. Moreover does not employ Pb on wire lead. (Lead-free compliant)

Line-up

	Part Number	Voltage Range (V.DC)	Nominal Capacitance (F)	Internal Resistance (mΩ)	Dimensions (mm)			
					φ D	L	φ d	P
Low ESR type (LR series)	PAS0815LR2R3105	2.3	1	70	8.0	15.0	0.6	3.5
	PAS1016LR2R3205		2	50	10.0	16.0	0.6	5.0
Large Capacitance type (LA series)	PAS1020LA2R3475	2.3	4.7	300	10.0	20.0	0.6	5.0
	PAS1220LA2R3106		10	200	12.5	20.0	0.6	5.0
	PAS1235LA2R3226		22	100	12.5	35.0	0.6	5.0
	PAS1840LA2R3566		56	70	18.0	40.0	0.8	8.0
	PAS1020LA3R0405	3.0	4	300	10.0	20.0	0.6	5.0
	PAS1220LA3R0905		9	200	12.5	20.0	0.6	5.0
	PAS1235LA3R0206		20	100	12.5	35.0	0.6	5.0
	PAS1840LA3R0506		50	70	18.0	40.0	0.8	8.0

Dimensions

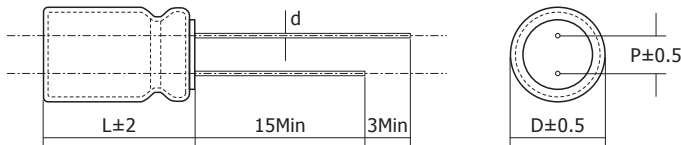

Specifications

- Operating Temp. Range : -25~+60°C
- Voltage Range : 2.3V DC / 3.0V DC
- Nominal Capacitance Range : 1~56F
- Capacitance Tolerance : -20~+20%
- Temperature Characteristics : Capacitance Over 70% of initial spec value (-25~+60°C)
Internal resistance Within 4 times of initial spec value (-25°C)
- High Temp. Load Test : Capacitance Over 70% of initial spec value
(60°C, Impress Max. operating voltage for 1,000 hours)
Internal resistance Within 4 times of initial spec value (Same as above)
- Humidity Resistance : Capacitance Over 70% of initial spec value (40°C, 90~95%, 500 hours)
Characteristics : Internal resistance Within 4 times of initial spec value (Same as above)


Applications

- Back-up power source for CPU, microcomputer, and flash memory writing when shut off the power.
- Load change leveling (life lengthening of main power source such as dry battery, Lithium primary battery)
- Storage power source combined with solar cell, fuel cell, generator, and so on.
- Main power source for small devices (toys, measuring equipments and so on).


Examples of Characteristics

Consult with us about other details.

Molecular structure of PAS

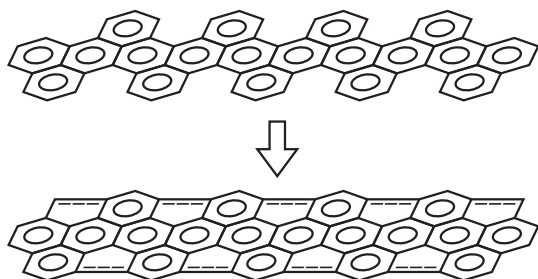

SEM image of PAS

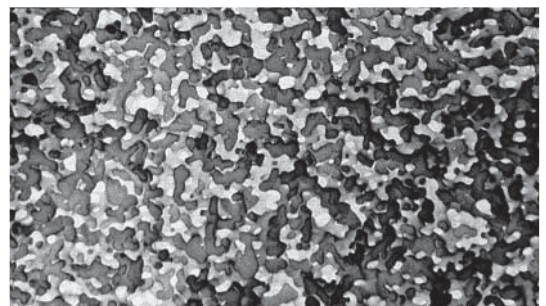

Shoei Electronics Co., Ltd. < A member of TAIYO YUDEN Co., Ltd. > URL: <http://www.u-shoei.co.jp/>

Headquarters:
587-3 Sumiyoshi, Ueda-shi,
Nagano, 386-0002 Japan

Tokyo Sales Office:
Shoei Dai-2 Nishikicho Bldg. 7F 3-15-2, Kanda-Nishikicho,
Chiyoda-ku, Tokyo, 101-0054 Japan
TEL: +81-3-3292-3388 / FAX: +81-3-3292-1070
E-mail: cap@u-shoei.co.jp

Osaka Sales Office:
Kawaramachi KT Bldg. 7F
3-3-7, Kawaramachi, Chuo-ku, Osaka, 541-0048 Japan
TEL: +81-6-6231-3337 / FAX: +81-6-6231-3339