

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

Surface mount type

TPU Series

RoHS compliance

Small size · Low profile

Face down terminal type


TPU series has a real advantage in size-sensitive applications using a face down terminal structure.



Specifications

Items	Condition	Specifications			
Rated voltage (V)	—	2.5	4.0	6.3	10
Surge voltage (V)	—	2.9	4.6	7.2	12
Category temperature range (°C)	—	-55 to +85			
Capacitance tolerance (%)	120Hz/20°C	M : ±20			
Rated capacitance range (μF)	120Hz/20°C	4.7 to 150			
Dissipation Factor (DF)	120Hz/20°C	Please see the attached characteristics list			
Leakage current	Rated voltage applied, after 5 minutes	Please see the attached characteristics list			
Equivalent series resistance (ESR)	100kHz/20°C	Please see the attached characteristics list			
Characteristics of impedance ratio at high temp. and low temp.	100kHz/+20°C	-55°C Z/Z _{20°C}	0.6 to 2.0		
		+85°C Z/Z _{20°C}	0.6 to 2.0		
Endurance	85°C, 1,000h, rated voltage applied	ΔC/C	Within±20% of the initial value		
		DF	≤ 1.5 times of the initial limit		
		LC	Within the initial limit		
Damp heat (Steady State)	60°C, 90 to 95%RH, 500h, No-applied voltage	ΔC/C	Within+40%, -20% of the initial value		
		DF	≤ 1.5 times of the initial limit		
		LC	≤ 3 times of the initial limit		
Surge	85°C, 1,000 cycles, 1kΩ discharge resistance, surge voltage applied	ΔC/C	Within±5% of the initial value		
		DF	Within the initial limit		
		LC	≤ 3 times of the initial limit		

Dimensions

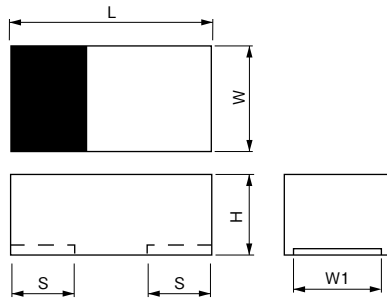

(unit: mm)

Size code	L ±0.1*1	W ±0.1*1	H ±0.1	S ±0.1*1	W1 ±0.1
S09	2.0	1.25	0.9	0.5	0.9
S11	2.0	1.25	1.1	0.5	0.9
A09	3.2	1.6	0.9	0.8	1.2
B09	3.5	2.8	0.9	0.8	2.2

*1 ±0.2:A09,B09

Size list

RV : Rated voltage

μF \ RV	2.5	4.0	6.3	10
4.7				S09
10			S09	
15		S09		
22	S09		S09	
33		S09	S11	A09
47	S09	S11	A09	
68	S11	A09		
100	A09			
150			B09	

TPU series characteristics list

Size code	Part number	Rated voltage (V)	Rated temperature (°C)	Rated capacitance (μF)	Category voltage (V)	Category temperature (°C)	DF (% max)	LC (μA) max/5min.	ESR (mΩmax) 100kHz/20°C	Maximum allowable ripple current (mA rms) 100kHz*1	MSL	
											Reflow temp. ≤260°C	Reflow temp. ≤250°C
S09	10TPU4R7MSI	10	85	4.7	10	85	10.0	4.7	300	360	—	3
	6TPU22MSI	6.3	85	22	6.3	85	10.0	27.7	150	510	—	3
	6TPU10MSI	6.3	85	10	6.3	85	10.0	6.3	250	400	—	3
	4TPU33MSI	4.0	85	33	4.0	85	10.0	26.4	150	510	—	3
	4TPU15MSI	4.0	85	15	4.0	85	10.0	6.0	250	400	—	3
	2R5TPU47MSI	2.5	85	47	2.5	85	10.0	23.5	150	510	—	3
	2R5TPU22MSI	2.5	85	22	2.5	85	10.0	5.5	250	400	—	3
S11	6TPU33MSK	6.3	85	33	6.3	85	10.0	41.6	150	510	—	3
	4TPU47MSK	4.0	85	47	4.0	85	10.0	37.6	150	510	—	3
	2R5TPU68MSK	2.5	85	68	2.5	85	10.0	34.0	150	510	—	3
A09	10TPU33MAI	10	85	33	10	85	10.0	33.0	150	510	3	3
	6TPU47MAI	6.3	85	47	6.3	85	10.0	29.6	150	510	3	3
	4TPU68MAI	4.0	85	68	4.0	85	10.0	27.2	150	510	3	3
	2R5TPU100MAI	2.5	85	100	2.5	85	10.0	25.0	150	510	3	3
B09	6TPU150MBI*2	6.3	85	150	6.3	85	10.0	94.5	100	670	3	3

Please refer to page 65 for the compensation coefficient of maximum allowable ripple current.

*1 100k to 500kHz, 45°C

*2 Under development

TPU

POSCAP

POSCAP Line-up

Guidelines and precautions for use

Series system diagram

Image of case size

Products list

Explanation of part numbers

Packing specifications

Marking

Recommended land pattern dimension

Recommended soldering condition

Fundamental structure

Characteristics

Reliability

Tantalum Solid Capacitors with Conductive Polymer

TPSF

TPU

TPL-TPLF

TPF

TPG

TPE

TPB

TPC

TPD

TA

TH

TQC