

## 阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement


1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

# HR CONNECTOR

Disconnectable insulation displacement connectors

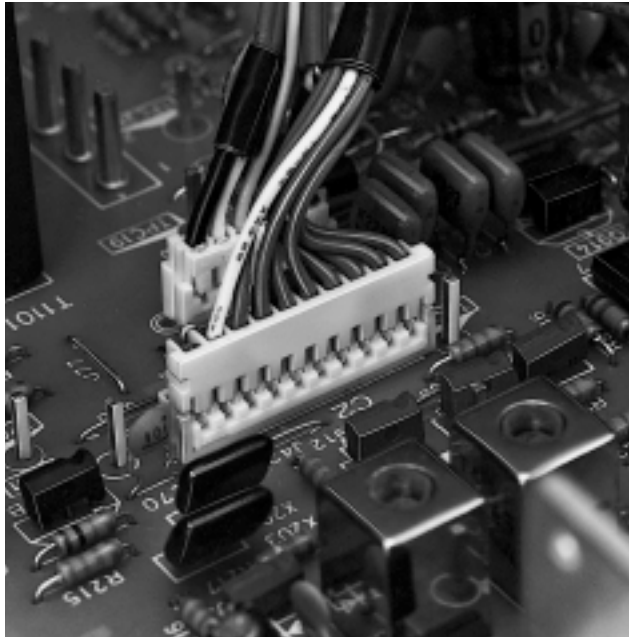

**This 2.5mm (.098") pitch connector for printed circuit boards has an ultra-thin construction. The in-line method provides high-density capability to the end user.**

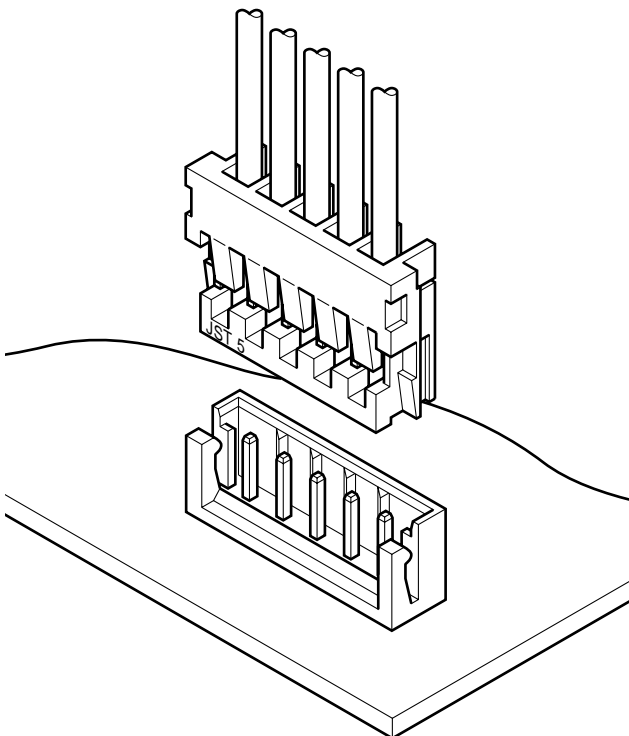

## Features

### • **Twin U-slot insulation displacement section**

The insulation displacement section has reliable twin U-slots like those of JST's other insulation displacement connectors.

### • **Ultra-thin design**

The connector is very small, with a mounting height of 11.3mm (.445") and a width of 4.1mm (.161").

### • **High reliability**

The contact has a dimple where it mates with the post to ensure a continuous gas tight connection when used for circuits requiring minute amounts of current and voltage. In addition, it is built to withstand vibration and prevent deformation.

### • **Strain relief**

A metallic strain relief secures the wire so as to protect the insulation displacement connection against vibration, impact and other external forces.

### • **Interchangeability**

The shrouded header is interchangeable with the 2.5mm (.098") pitch crimp style EH connectors.


## Specifications

- Current rating: 2A AC, DC (AWG #24)
  - Voltage rating: 250V AC, DC
  - Temperature range: -25°C to +85°C  
(including temperature rise in applying electrical current)
  - Contact resistance: Initial value/10m Ω max.  
After environmental testing/20m Ω max.
  - Insulation resistance: 1,000M Ω min.
  - Withstanding voltage: 1,000V AC/minute
  - Applicable wire: UL1007(Contact JST for details regarding other UL wires.)  
AWG #28, #26, #24  
Conductor/7 strands, tin-coated  
Insulation O.D/1.0 to 1.5mm(.039" to .059")
  - Applicable PC board thickness: 0.8 to 1.6mm(.031" to .063")
- \* Contact JST for details.

## Standards

- Recognized E60389
- 1 Certified LR20812
- 2 R75089

## Receptacle

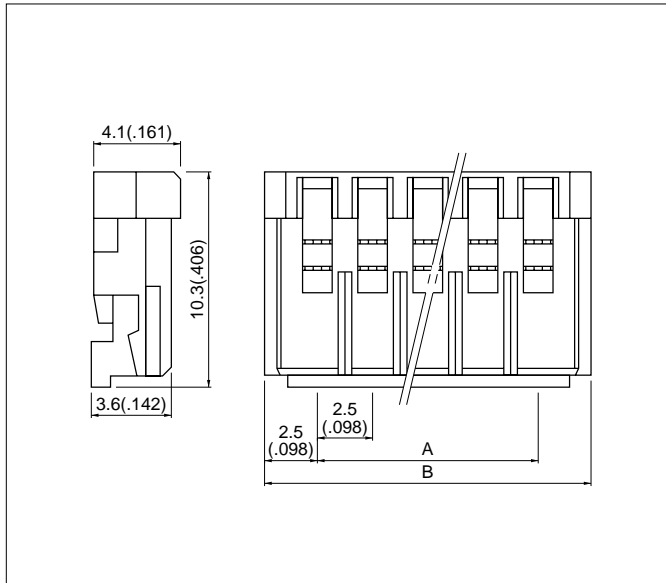

Circuits	Model No.			Dimensions mm(in.)		Q'ty / box
	AWG #28 (green)	AWG #26 (natural/white)	AWG #24 (black)	A	B	
2	02HR-8M	02HR-6S	02HR-4K	2.5 (.098)	7.5 (.295)	1,000
3	03HR-8M	03HR-6S	03HR-4K	5.0 (.197)	10.0 (.394)	1,000
4	04HR-8M	04HR-6S	04HR-4K	7.5 (.295)	12.5 (.492)	1,000
5	05HR-8M	05HR-6S	05HR-4K	10.0 (.394)	15.0 (.591)	1,000
6	06HR-8M	06HR-6S	06HR-4K	12.5 (.492)	17.5 (.689)	1,000
7	07HR-8M	07HR-6S	07HR-4K	15.0 (.591)	20.0 (.787)	500
8	08HR-8M	08HR-6S	08HR-4K	17.5 (.689)	22.5 (.886)	500
9	09HR-8M	09HR-6S	09HR-4K	20.0 (.787)	25.0 (.984)	500
10	10HR-8M	10HR-6S	10HR-4K	22.5 (.886)	27.5 (1.083)	500
11	11HR-8M	11HR-6S	11HR-4K	25.0 (.984)	30.0 (1.181)	500
12	12HR-8M	12HR-6S	12HR-4K	27.5 (1.083)	32.5 (1.280)	500
13	13HR-8M	13HR-6S	13HR-4K	30.0 (1.181)	35.0 (1.378)	250
15	-	15HR-6S	15HR-4K	35.0 (1.378)	40.0 (1.575)	250

### Material and Finish


Contact: Phosphor bronze, tin-plated  
Housing: Nylon 66, UL94V-0

Note: 15HR-6S and 15HR-4K are not UL recognized nor CSA certified.

## Shrouded header

The shrouded headers are interchangeable with those of the EH and HR crimp style connectors.

## PC board layout (viewed from soldering side) and Assembly layout

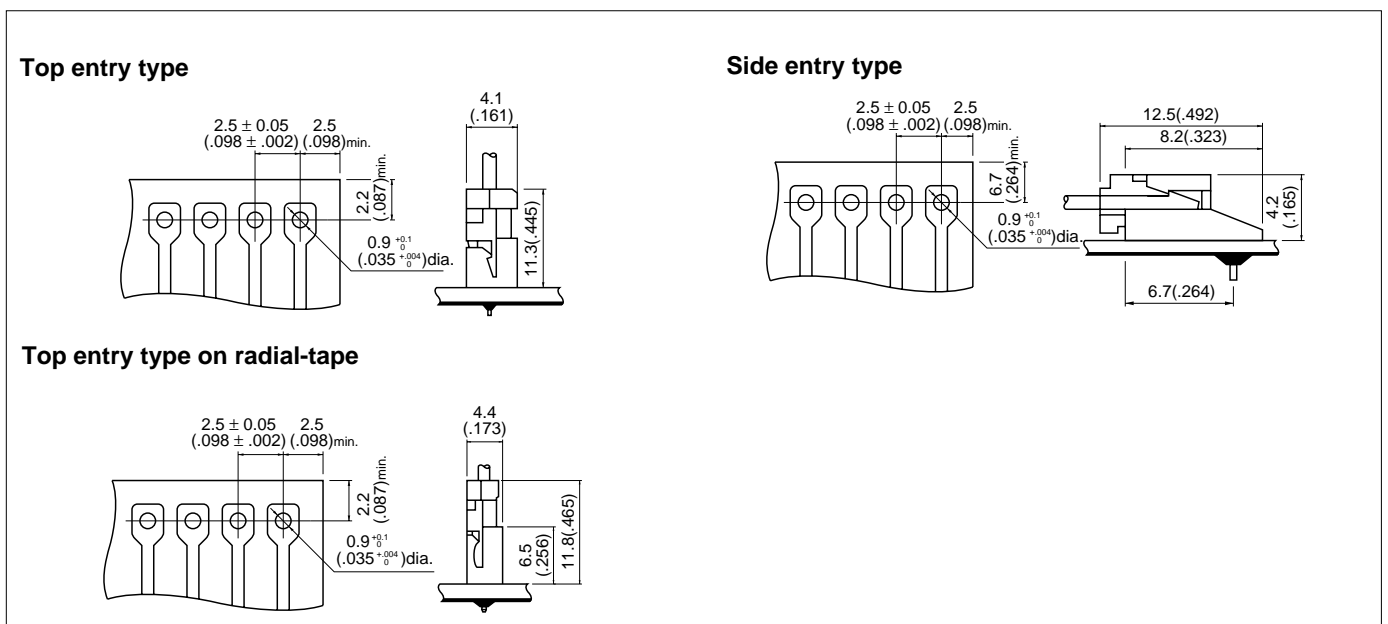

### Note:

1. Tolerances are non-cumulative: ±0.05mm(±.002") for all centers.
2. Hole dimensions differ according to the kind of PC board and piercing method. If PC boards are made of hard material such as FR-4 are used, the hole dimensions should be larger. The dimensions above should serve as a guideline. Contact JST for details.