


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-35°C TO + 85°C (NOTE 1)	STORAGE TEMPERATURE RANGE	-10°C TO + 60°C (NOTE 3)	
	OPERATING HUMIDITY RANGE	20 % TO 80 % (NOTE 2)	STORAGE HUMIDITY RANGE	40 % TO 70 % (NOTE 3)	
	VOLTAGE	AC/DC 100V	APPLICABLE CONNECTOR	DF50-50DP-1V DF50-50DP-1H	
	CURRENT	AWG 28 : 1.0 A AWG 30 : 0.9 A AWG 32 : 0.7 A	APPLICABLE CONTACT	DF50-2830SCFA	
SPECIFICATIONS					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
CONSTRUCTION					
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	X	X	
MARKING	CONFIRMED VISUALLY.		X	X	
ELECTRIC CHARACTERISTICS					
INSULATION RESISTANCE	100V DC.	500MΩ MIN.	X	-	
VOLTAGE PROOF	300V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	-	
MECHANICAL CHARACTERISTICS					
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.75 mm, AT 10 CYCLES FOR EACH, FOR 3 DIRECTIONS.	NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	-	
SHOCK	490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.				
TENSILE STRENGTH	PULL A CABLE WITHOUT CRIMPING A JACKET.	AWG28 : 10N MIN AWG30 : 8N MIN			
ENVIRONMENTAL CHARACTERISTICS					
DAMP HEAT (STEADY STATE)	EXPOSED AT 40 ± 2 °C, 90 TO 95 %, 96 h.	① INSULATION RESISTANCE: 100MΩ MIN. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	-	
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→+85°C TIME 30→ 30min. UNDER 5 CYCLES. (THE TRANSFERRING TIME OF THE TANK IS 2~3 min)	① INSULATION RESISTANCE: 500MΩ MIN. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	-	
REMARKS					
NOTE 1: INCLUDING THE TEMPERATURE RISE BY CURRENT.					
NOTE 2: NON-CONDENSING					
NOTE 3: APPLY TO THE CONDITION OF LONG TERM STORAGE FOR UNUSED PRODUCTS BEFORE PCB ON BOARD. AFTER PCB BOARD, OPERATING TEMPERATURE AND HUMIDITY RANGE IS APPLIED FOR INTERIM STORAGE DURING TRANSPORTATION					
Unless otherwise specified , refer to JIS C 5402.					
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			APPROVED	KI. AKIYAMA	12.05.31
			CHECKED	HK. UMEHARA	12.05.31
			DESIGNED	TT. OHSAKO	12.05.30
			DRAWN	TT. OHSAKO	12.05.30
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.	ELC4-330238-00	
	SPECIFICATION SHEET		PART NO.	DF50S-50DS-1C	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL665-0012-4-00	1/1

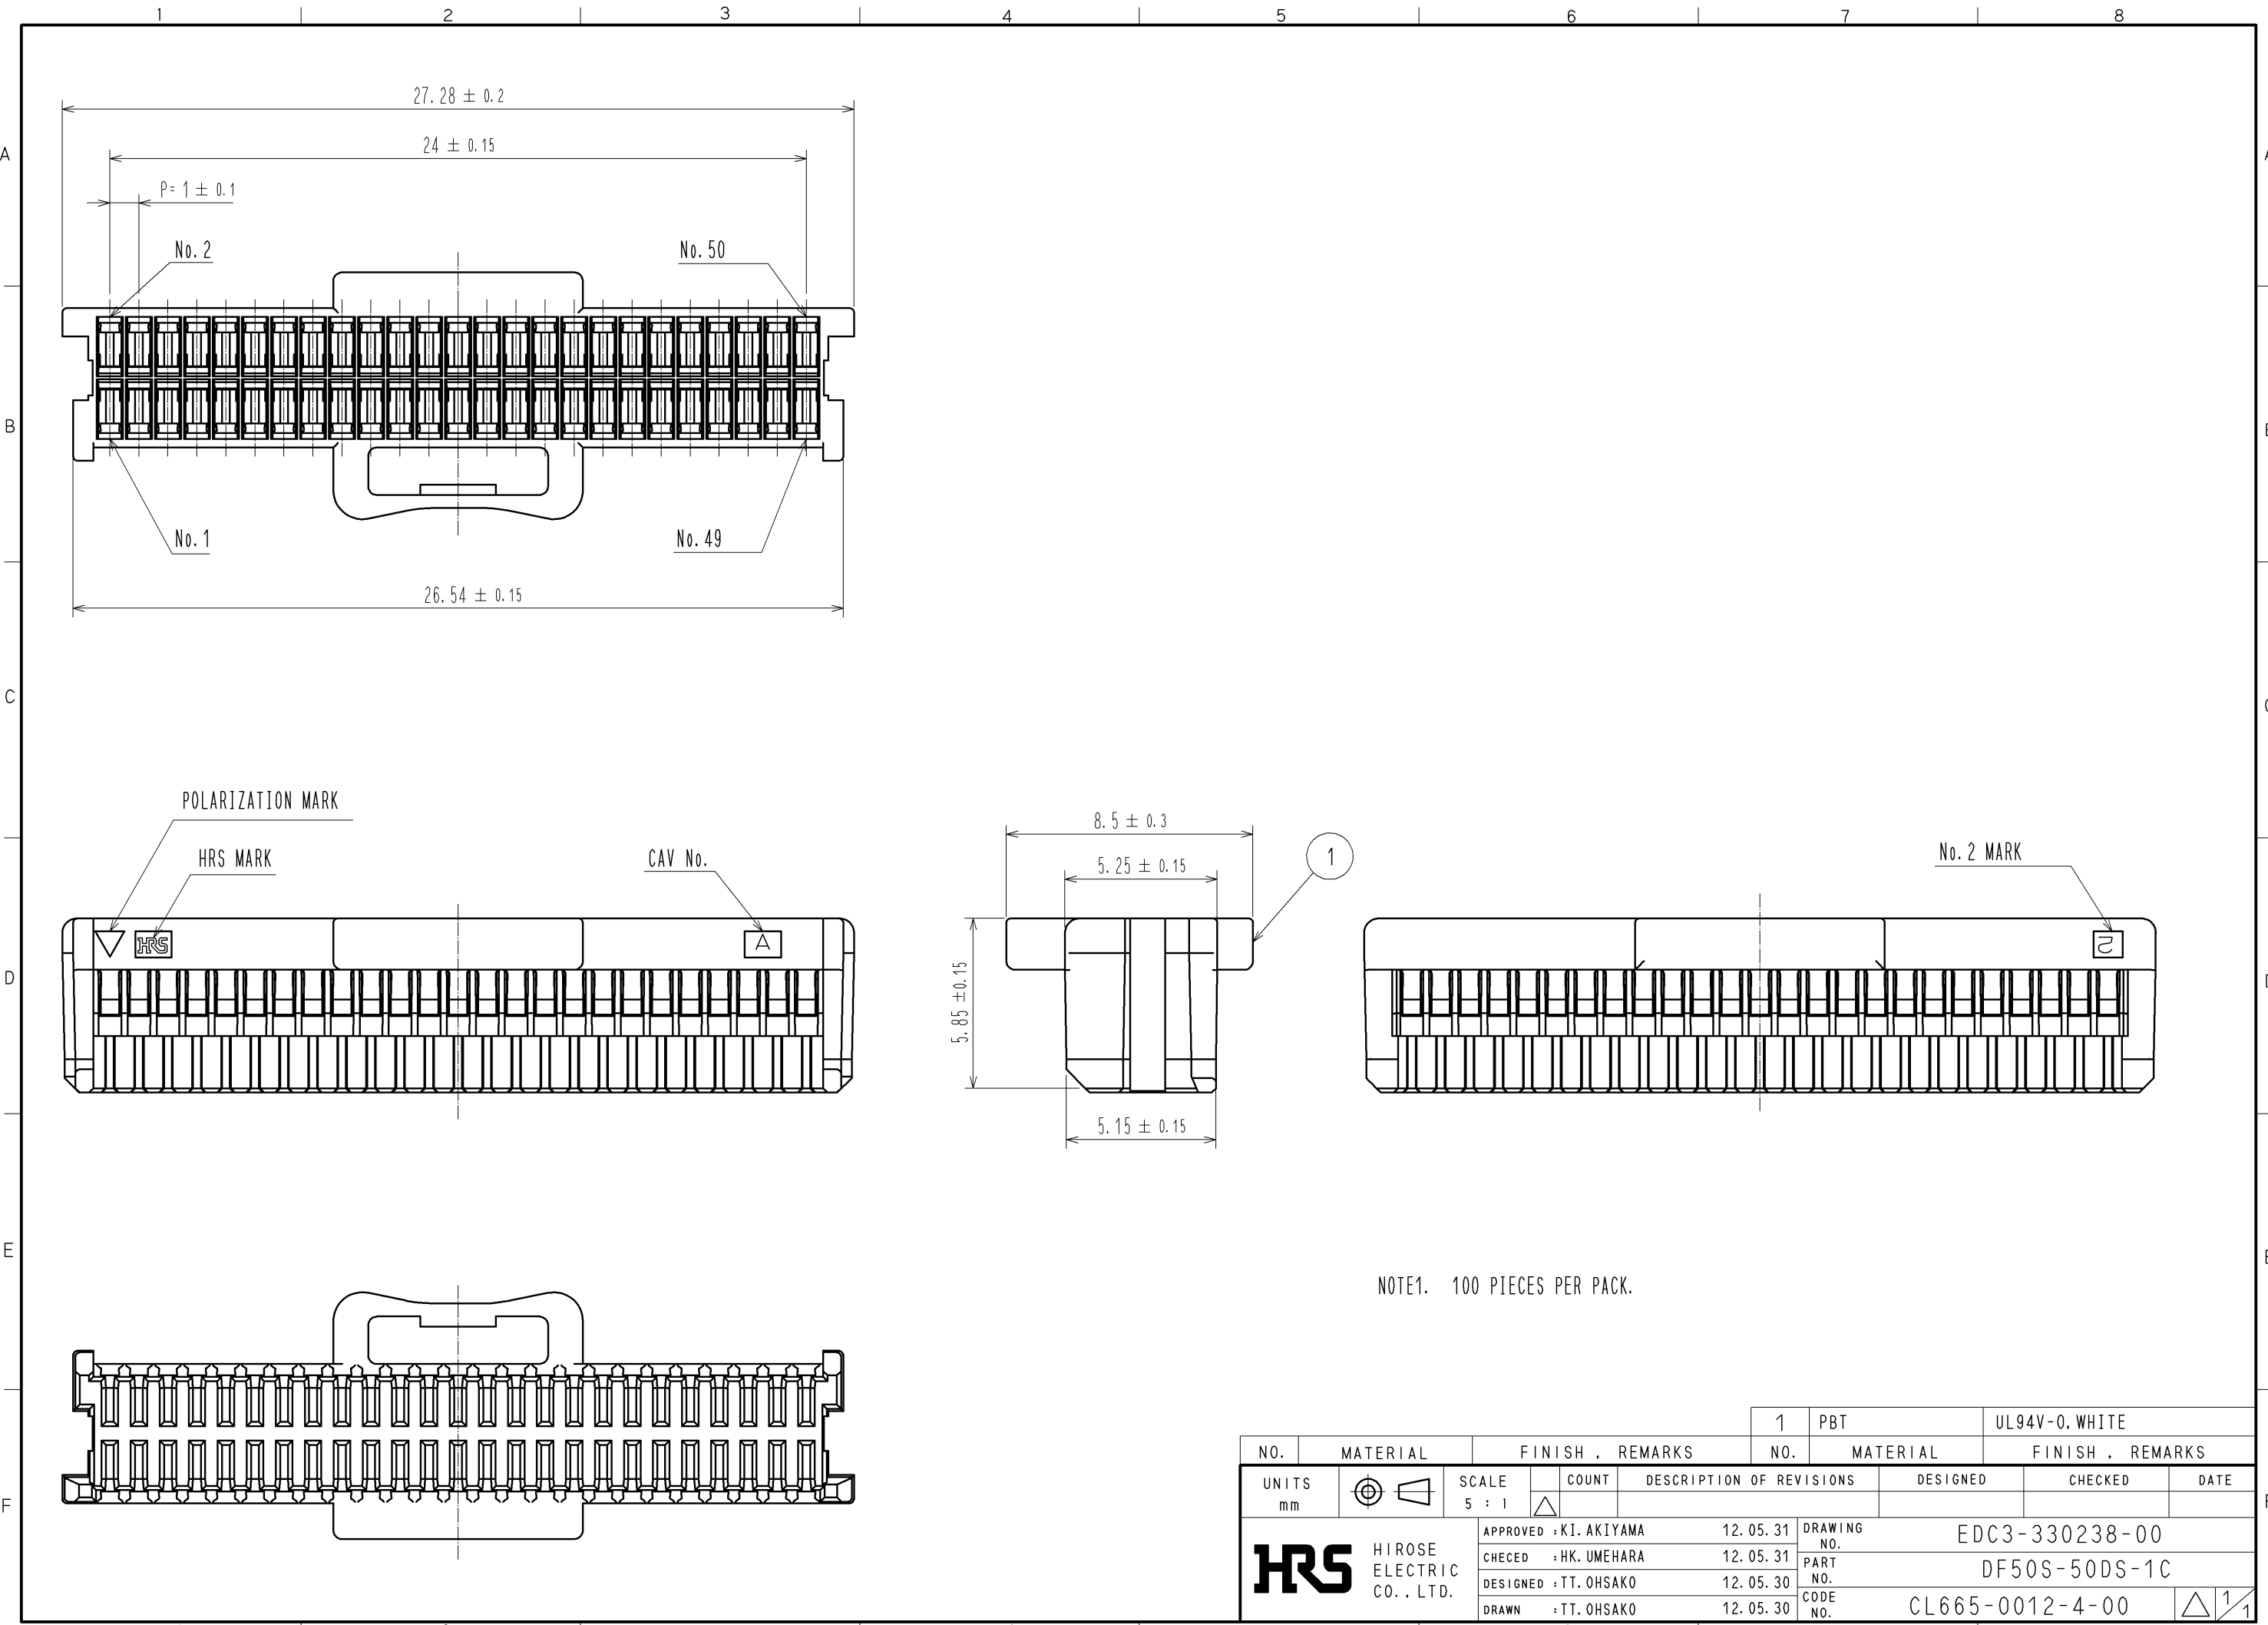

NOTE1. 100 PIECES PER PACK.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
1	PBT						UL94V-0. WHITE
UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
mm	5 : 1	△					
HIROSE ELECTRIC CO., LTD.			APPROVED : KI. AKIYAMA	12.05.31	DRAWING NO.		EDC3-330238-00
			CHECED : HK. UMEHARA	12.05.31	PART NO.		DF50S-50DS-1C
			DESIGNED : TT. OHSAKO	12.05.30	CODE NO.		CL665-0012-4-00
			DRAWN : TT. OHSAKO	12.05.30			△ 1/1