


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

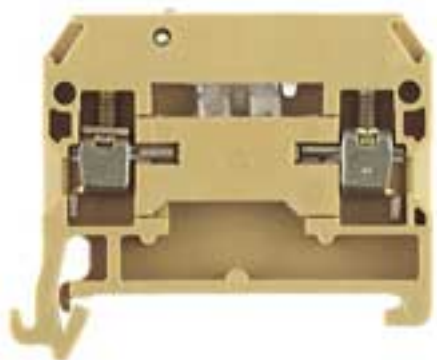

General ordering data

Order No.	0172160000
Part designation	SAKR/35
Version	Disconnect and modular disconnect terminal, 4 mm ² , Screw connection, PA 66, beige, TS 35
EAN	4008190030445
Qty.	100 pc(s).

Product notes

Note, ordering data	SAKR/35 2 StB order no. 0183360000
Note, technical data	Torque for SAKR with socket: 0.5 - 0.7 Nm.
Note, accessories	QB 25 blank, refer to "Accessories" section. Note that max. conductor connection with QB = 2.5 mm ² . Twin wire-end ferrules ZH 0.5 - ZH 1.5 can be used.

PT OKIECEEx/ATEX rating data

EU-type examination certificate	SIRA03ATEX4288U
Download English	SIRA03ATEX4288U_e.pdf
IECEEx Certificate of Conformity	IECEXSIR05.0033U
Download	IECEXSIR05.0033U_e.pdf
ATEX voltage	400 V
ATEX current	10 A
ATEX conductor cross-section	4 mm ²
IECEEx voltage	400 V
IECEEx current	10 A
IECEEx conductor cross-section	4 mm ²
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	Einsatztemperaturbereich siehe EG-Baumusterprüfbescheinigung/IECEEx-Certificate of Conformity

Additional technical data

Colour of insulating material	beige
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35
Insulating material	PA 66

Additional technical data

Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 100 °C
Product family	SAK Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V2
Version	Test-disconnect terminals

CSA rating data

Voltage (CSA)	300 V
CSA current	10 A
Min. cross-section (CSA)	AWG 22
Max. cross-section (CSA)	AWG 12

Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm ²

Conductors for clamping (rated connection)

Clamping range, min.	0.13 mm ²
Clamping range, max.	4 mm ²
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	8 mm
Clamping screw	M 3
Blade size	0.6 x 3.5 mm
Tightening torque range	0.5...1.0 Nm
Torque level with DMS electric screwdriver	2
Gauge to IEC 60947-1	A3
Solid, min.	0.5 mm ²
Solid, max.	4 mm ²
Stranded, min.	1.5 mm ²
Stranded, max.	4 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	4 mm ²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm ²
Twin wire-end ferrule, min.	0.5 mm ²
Twin wire end ferrule, max.	1.5 mm ²
AWG conductor size, min.	AWG 26
AWG conductor size, max.	AWG 12
AWG conductor size, min.	0.13 mm ²
AWG conductor size, max.	3.31 mm ²

Dimensions

Width	6.5 mm
Height of lowest version	40.5 mm
Length	42 mm
TS 32 offset	4 mm
TS 35 offset	21 mm

Disconnect terminals

Integral test socket	No
Slitting	Pivoting
Torque level with DMS electric screwdriver	2

Rating data

Rated cross-section	4 mm ²
Rated voltage	400 V
Rated impulse voltage	6 kV
Rated current	10 A
Standards	IEC 60947-7-1
Current with max. conductor	10 A
Pollution severity	3

UL rating data

Voltage (UL)	300 V
Current (UL)	10 A
Min. cross-section (UL)	AWG 22
Max. cross-section (UL)	AWG 12

Approvals

Approvals institutes



Downloads

STEP	0172160000_08835_SAKR-35_STP.stp
------	----------------------------------

Classifications

ETIM 2.0	EC000902
ETIM 3.0	EC000902
eClass 4.1	27-14-11-17
eClass 5.0	27-14-11-26
eClass 5.1	27-14-11-26

Similar products

Order No.	Part designation	Version
0687460000	DKT 4/35	Disconnect and modular disconnect terminal, 4 mm ² , Screw connection, PA 66, beige, TS 35

1304960000	DKT 4V/35	Disconnect and modular disconnect terminal, 4 mm ² , Screw connection, PA 66, beige, TS 35
0172180000	SAKR/35 BL	Disconnect and modular disconnect terminal, 4 mm ² , Screw connection, PA 66, blue, TS 35
0185760000	SAKRD/35	Disconnect and modular disconnect terminal, 4 mm ² , Screw connection, PA 66, beige, TS 35