


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

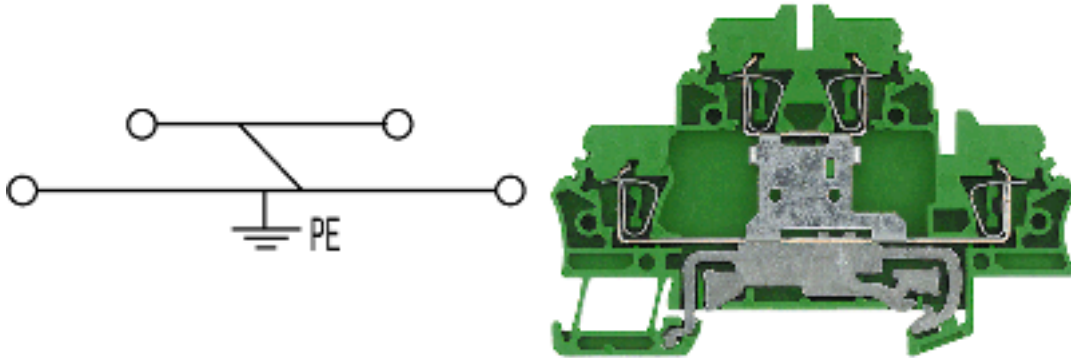

General ordering data

Order No.	1690000000
Part designation	ZDK 2.5PE
Version	Earth terminal, 2.5 mm ² , Tension clamp connection, Wemid, green/yellow, TS 35
EAN	4008190875466
Qty.	50 pc(s).

Product notes

Note, technical data	2.5 mm ² flexible conductors with wire end ferrules are crimped with the Weidmüller PZ 6/5 crimping tool.
Product description	Z-series standard ranges provide solutions for conductor cross-sections from 0.05 to 35 mm ² .

PT OKIECEEx/ATEX rating data

EU-type examination certificate	KEMA97ATEX4677U
Download, German	KEMA97ATEX4677U_d.pdf
Download English	KEMA97ATEX4677U_e.pdf
IECEX Certificate of Conformity	IECEXULD05.0009U
Download	IECEXULD05.0009U_e.pdf
ATEX conductor cross-section	2.5 mm ²
IECEX conductor cross-section	2.5 mm ²
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	Einsatztemperaturbereich siehe EG-Baumusterprüfbescheinigung/IECEX-Certificate of Conformity
Marking EN 60079-7	Ex e II
Marking ATEX Directive 94/9/EC	Ex II 2 G D

Additional technical data

Colour of insulating material	green/yellow
Connection direction	top
End plate required	Yes
Explosion-tested version "Ex e"	Yes

Additional technical data

Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	Yes
No. of identical terminals	1
No. of levels	2
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	Z-series
Type of connection	Clamped
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	PE terminal

CSA rating data

Min. cross-section (CSA)	AWG 26
Max. cross-section (CSA)	AWG 12

Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm ²

Conductors for clamping (rated connection)

Clamping range, min.	0.05 mm ²
Clamping range, max.	2.5 mm ²
Type of connection	Tension clamp connection
2nd type of connection	clamped
Connection direction	top
No. of connections	4
Stripping length	10 mm
Blade size	0.6 x 3.5 mm
Gauge to IEC 60947-1	A2
Solid, min.	0.5 mm ²
Solid, max.	2.5 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	2.5 mm ²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228/1)	2.5 mm ²
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm ²
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	1.5 mm ²
AWG conductor size, min.	AWG 30
AWG conductor size, max.	AWG 12
AWG conductor size, min.	0.05 mm ²
AWG conductor size, max.	3.31 mm ²

Dimensions

Width	5.1 mm
Height of lowest version	54 mm

Dimensions

Length	79.5 mm
TS 35 offset	39 mm

PE rating data

PEN function	No
Pollution severity	3
Rated cross-section	2.5 mm ²
Rated impulse withstand voltage to adjacent terminal	6 kV
Rated short-time current	300 A (2.5 mm ²)
Rated voltage for adjacent terminal	500 V
Standards	IEC 60947-7-2

UL rating data

Min. cross-section (UL)	AWG 30
Max. cross-section (UL)	AWG 12

Approvals

Approvals institutes



Classifications

eClass 4.1	27-14-03-05
eClass 5.0	27-14-03-05
eClass 5.1	27-14-03-05

Similar products

Order No.	Part designation	Version
1608640000	ZPE 2.5	Earth terminal, 2.5 mm ² , Tension clamp connection, Wemid, green/yellow, TS 35
1608650000	ZPE 2.5/3AN	Earth terminal, 2.5 mm ² , Tension clamp connection, Wemid, green/yellow, TS 35
1608660000	ZPE 2.5/4AN	Earth terminal, 2.5 mm ² , Tension clamp connection, Wemid, green/yellow, TS 35