

阅读申明


- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .





Pin headers SL 5.08/135B

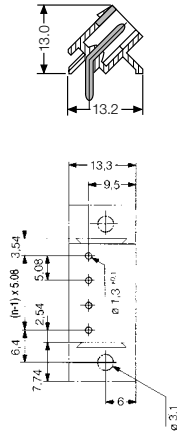

Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 216



Pin headers SL 5.08/180



Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 216

Pin headers SL 5.08/180B



Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	15

*Pollution severity 3 / Overvoltage category III
Additional technical data see page 216

Solder pin length		4.5 mm	4.5 mm		
Color		●	●		
Poles	Type	Part No.	Part No.	Qty.	
2	SL 5.08/2/135B	1605990000	1635500000	100	
3	SL 5.08/3/135B	1606000000	1635510000	100	
4	SL 5.08/4/135B	1606010000	1635520000	100	
5	SL 5.08/5/135B	1606020000	1635530000	50	
6	SL 5.08/6/135B	1606030000	1635540000	50	
7	SL 5.08/7/135B	1606040000	1635550000	50	
8	SL 5.08/8/135B	1606050000	1635560000	50	
9	SL 5.08/9/135B	1606060000	1635570000	50	
10	SL 5.08/10/135B	1606070000	1635580000	50	
11	SL 5.08/11/135B	1606080000	1635590000	50	
12	SL 5.08/12/135B	1606090000	1635600000	50	
13	SL 5.08/13/135B	1606100000	1635610000	50	
14	SL 5.08/14/135B	1606110000	1635620000	50	
15	SL 5.08/15/135B	1606120000	1635630000	50	
16	SL 5.08/16/135B	1606130000	1635640000	50	
17	SL 5.08/17/135B	1606140000	1635650000	20	
18	SL 5.08/18/135B	1606150000	1635660000	20	
19	SL 5.08/19/135B	1606160000	1635670000	20	
20	SL 5.08/20/135B	1606170000	1635680000	20	
21	SL 5.08/21/135B	1606180000	1635690000	20	
22	SL 5.08/22/135B	1606190000	1635700000	20	
23	SL 5.08/23/135B	1606200000	1635710000	20	
24	SL 5.08/24/135B	1606210000	1635720000	20	

Accessories	Page
Mounting	187*
Marking	190
Coding	192, 193
Miscellaneous	-

Solder pin length		4.5 mm	4.5 mm		
Color		●	●		
Poles	Type	Part No.	Part No.	Qty.	
2	SL 5.08/2/180	1521860000	1521810000	100	
3	SL 5.08/3/180	1521960000	1521910000	100	
4	SL 5.08/4/180	1522060000	1522010000	100	
5	SL 5.08/5/180	1522160000	1522110000	50	
6	SL 5.08/6/180	1522260000	1522210000	50	
7	SL 5.08/7/180	1522360000	1522310000	50	
8	SL 5.08/8/180	1522460000	1522410000	50	
9	SL 5.08/9/180	1522560000	1522510000	50	
10	SL 5.08/10/180	1522660000	1522610000	50	
11	SL 5.08/11/180	1522760000	1522710000	50	
12	SL 5.08/12/180	1522860000	1522810000	50	
13	SL 5.08/13/180	1522960000	1522910000	50	
14	SL 5.08/14/180	1523060000	1523010000	50	
15	SL 5.08/15/180	1523160000	1523110000	50	
16	SL 5.08/16/180	1523260000	1523210000	50	
17	SL 5.08/17/180	1523360000	1523310000	20	
18	SL 5.08/18/180	1523460000	1523410000	20	
19	SL 5.08/19/180	1523560000	1523510000	20	
20	SL 5.08/20/180	1523660000	1523610000	20	
21	SL 5.08/21/180	1523760000	1523710000	20	
22	SL 5.08/22/180	1523860000	1523810000	20	
23	SL 5.08/23/180	1523960000	1523910000	20	
24	SL 5.08/24/180	1524060000	1524010000	20	

Accessories	Page
Mounting	-
Marking	190
Coding	192, 193
Miscellaneous	-

Solder pin length		4.5 mm	4.5 mm		
Color		●	●		
Poles	Type	Part No.	Part No.	Qty.	
2	SL 5.08/2/180B	1524160000	1524110000	100	
3	SL 5.08/3/180B	1524260000	1524210000	100	
4	SL 5.08/4/180B	1524360000	1524310000	100	
5	SL 5.08/5/180B	1524460000	1524410000	50	
6	SL 5.08/6/180B	1524560000	1524510000	50	
7	SL 5.08/7/180B	1524660000	1524610000	50	
8	SL 5.08/8/180B	1524760000	1524710000	50	
9	SL 5.08/9/180B	1524860000	1524810000	50	
10	SL 5.08/10/180B	1524960000	1524910000	50	
11	SL 5.08/11/180B	1525060000	1525010000	50	
12	SL 5.08/12/180B	1525160000	1525110000	50	
13	SL 5.08/13/180B	1525260000	1525210000	50	
14	SL 5.08/14/180B	1525360000	1525310000	50	
15	SL 5.08/15/180B	1525460000	1525410000	50	
16	SL 5.08/16/180B	1525560000	1525510000	50	
17	SL 5.08/17/180B	1525660000	1525610000	20	
18	SL 5.08/18/180B	1525760000	1525710000	20	
19	SL 5.08/19/180B	1525860000	1525810000	20	
20	SL 5.08/20/180B	1525960000	1525910000	20	
21	SL 5.08/21/180B	1526060000	1526010000	20	
22	SL 5.08/22/180B	1526160000	1526110000	20	
23	SL 5.08/23/180B	1526260000	1526210000	20	
24	SL 5.08/24/180B	1526360000	1526310000	20	

Accessories	Page
Mounting	187*
Marking	190
Coding	192, 193
Miscellaneous	-

* See Note, page 187