


阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

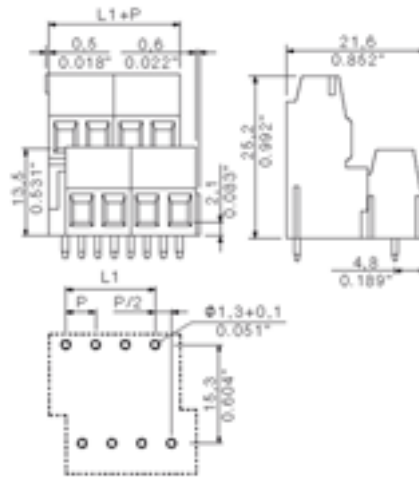

General ordering data

| | |
|------------------|--|
| Order No. | 1768850000 |
| Part designation | LM2N5.08/4 3.5 OR |
| Version | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 4, 90°, Box |
| EAN | 4032248115587 |
| Qty. | 50 pc(s). |

System parameters

| | |
|---------------------------------|--------------------------|
| Product family | System LM |
| Conductor connection system | Clamping yoke connection |
| Fitted to PCB | Soldered connection |
| Outgoing direction of conductor | 90° |
| Pitch | 5.08 mm |
| Pitch in inch | 0.2 inch |
| No. of poles | 4 |
| Fitted by customer | yes |
| Max. adjacent poles per row | 48 |
| No. of rows | 2 |
| Solder pin length | 3.5 mm |
| Dia. of fitting hole | 1.3 mm |
| Fitting hole tolerance | + 0.1 mm |
| No. of solder pins per pole | 1 |

System parameters

| | |
|---|------------------------|
| Screwdriver blade | 0.6 x 3.5 |
| Screwdriver blade standard | DIN 5264 |
| Tightening torque, min. | 0.4 Nm |
| Tightening torque, max. | 0.5 Nm |
| Clamping screw | M 2.5 |
| Stripping length | 6 mm |
| L1 in mm | 5.08 mm |
| L1 in inch | 0.2 inch |
| Electric shock protection to DIN VDE 0470 | IP 20 |
| Electric shock protection to DIN VDE 0470 | Safe from finger touch |

Material data

| | |
|-------------------------------|---------------------|
| Insulating material | Wemid (PA) |
| Colour | orange |
| colour chart | Similar to RAL 2000 |
| Insulating material group | I |
| Flammability class UL 94 | V-0 |
| CTI | >= 600 |
| Temperature of glow-wire test | 750 °C |
| Duration of glow-wire test | 30 S |
| Contact base material | Copper alloy |
| Contact surface | tinned |
| Storage temperature, min. | -25 °C |
| Storage temperature, max. | 55 °C |

Connectable conductors

| | |
|---|------------------------|
| Clamping range, min. | 0.2 mm ² |
| Clamping range, max. | 2.5 mm ² |
| AWG, min. | 24 |
| AWG, max. | 14 |
| O.D. of conductor insulation, max. | 2.9 mm |
| Solid, min. H05(07) V-U | 0.2 mm ² |
| Solid, max. H05(07) V-U | 2.5 mm ² |
| Flexible, min. H05(07) V-K | 0.2 mm ² |
| Flexible, max. H05(07) V-K | 1.5 mm ² |
| With wire end ferrule, acc. to DIN 46 228/1, min. | 0.25 mm ² |
| With wire end ferrule, acc. to DIN 46 228/1, max. | 1.5 mm ² |
| w. plastic collar ferrule, DIN 46228 pt 4, min. | 0.25 mm ² |
| w. plastic collar ferrule, DIN 46228 pt 4, max. | 1.5 mm ² |
| Gauge to EN 60999 a x b; ø | 2.4 mm x 1.5 mm; 1.9mm |

DIN IEC rating data

| | |
|--|--------|
| Rated current, min. No. pins (Tu=20°C) | 17.5 A |
| Rated current, max. No. pins (Tu=20°C) | 16 A |
| Rated current, min. No. pins (Tu=40°C) | 17.5 A |
| Rated current, max. No. pins (Tu=40°C) | 14.2 A |
| Rated voltage for overvoltage class/pollution severity II/2 | 630 V |
| Rated voltage for overvoltage class/pollution severity III/2 | 320 V |

DIN IEC rating data

| | |
|--|-------------------|
| Rated voltage for overvoltage class/pollution severity III/3 | 250 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2 | 4 kV |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 4 kV |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 4 kV |
| Short-time withstand current resistance | 3 x 1s with 120 A |

CSA rating data

| | |
|------------------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A |
| AWG conductor (field wiring), min. | 24 |
| AWG conductor (field wiring), max. | 14 |

UL 1059 rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A |
| AWG conductor, min. | 24 |
| AWG conductor, max. | 14 |

Approvals

Approvals institutes



Downloads

| | |
|---------------------------------------|----------|
| CAD Library (P-CAD Format - Standard) | LM2N.lib |
|---------------------------------------|----------|

Classifications

| | |
|------------|----------|
| ETIM 2.0 | NK |
| ETIM 3.0 | EC001284 |
| eClass 4.1 | NK |
| eClass 5.0 | NK |
| eClass 5.1 | NK |

Similar products

| Order No. | Part designation | Version |
|------------|-------------------|--|
| 1768860000 | LM2N5.08/6 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 6, 90°, Box |
| 1768870000 | LM2N5.08/8 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 8, 90°, Box |

| | | |
|------------|--------------------|---|
| 1768880000 | LM2N5.08/10 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 10, 90°, Box |
| 1768890000 | LM2N5.08/12 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 12, 90°, Box |
| 1768900000 | LM2N5.08/14 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 14, 90°, Box |
| 1768910000 | LM2N5.08/16 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 16, 90°, Box |
| 1768920000 | LM2N5.08/18 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 18, 90°, Box |
| 1768930000 | LM2N5.08/20 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 20, 90°, Box |
| 1768940000 | LM2N5.08/22 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 22, 90°, Box |
| 1768950000 | LM2N5.08/24 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 24, 90°, Box |
| 1768960000 | LM2N5.08/26 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 26, 90°, Box |
| 1768970000 | LM2N5.08/28 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 28, 90°, Box |
| 1768980000 | LM2N5.08/30 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 30, 90°, Box |
| 1768990000 | LM2N5.08/32 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 32, 90°, Box |
| 1769000000 | LM2N5.08/34 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 34, 90°, Box |
| 1769010000 | LM2N5.08/36 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 36, 90°, Box |
| 1769020000 | LM2N5.08/38 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 38, 90°, Box |
| 1769030000 | LM2N5.08/40 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 40, 90°, Box |
| 1769040000 | LM2N5.08/42 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 42, 90°, Box |

| | | |
|------------|--------------------|---|
| 1769050000 | LM2N5.08/44 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 44, 90°, Box |
| 1769060000 | LM2N5.08/46 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 46, 90°, Box |
| 1769070000 | LM2N5.08/48 3.5 OR | PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm ² , Pitch: 5.08 mm, No. of poles: 48, 90°, Box |