

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

PANDUIT PART NUMBER	WIRE RANGE	COLOR CODE	DIMENSIONS in.		CRIMP TOOL	STRIP LENGTH +1/32 +0.8 -0 -0
			A ±.030	B		
DV18-250MB-3K	22-18	RED	.90 (22,9)	.155 (3,94)	CD-800-1, CD9-1A	9/32 (7,1)
DV14-250MB-3K	16-14	BLUE	.90 (22,9)	.175 (4,45)	CD-800-2, CD9-2A	9/32 (7,1)
DV10-250M-2K	12-10	YELLOW	.96 (24,4)	.225 (5,71)	CD-800-3, CD9-3B	11/32 (8,7)

NOTES:

- CSA CERTIFIED FOR:
 - 600 V MAX. VOLTAGE RATING
 - 300 V MAX. VOLTAGE RATING (DV10-250M-2K)
 - 221°F (105°C) MAX. TEMP. RATING
 - STRANDED COPPER WIRE ONLY
- MATERIAL:
 - STAMPING - .03" THK COPPER, NICKEL PLATED
 - HOUSING - VINYL
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- PACKAGE QUANTITY: 3K = 3000 PCS. 2K = 2000 PCS.
CONTINUOUS MOLDED CARRIER STRIP

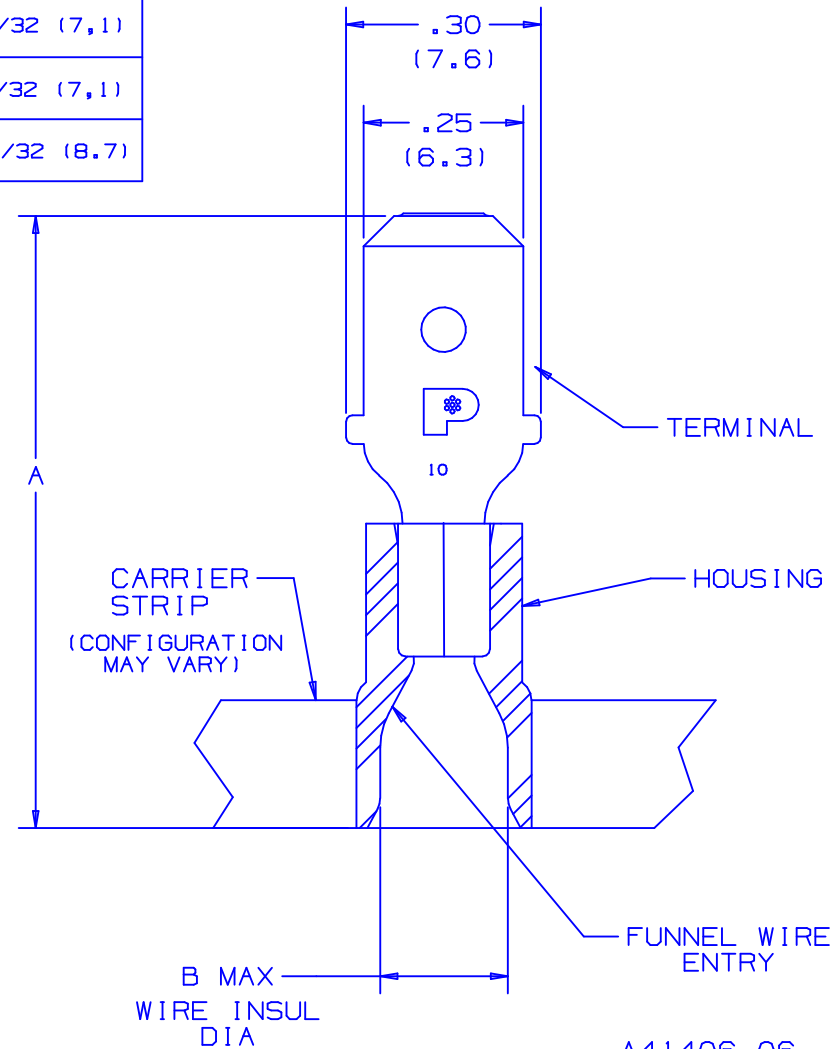

CERTIFIED
LR31212

A41406_06

06	11/04	KLFU		ADDED LOGO AND MARKING 10					TINLEY PARK, ILLINOIS		
05	1/01	RM	SKB	FILESPEC WAS N41406AA_PCD-04	08933	JAC	CCH				
04		ES		MATERIAL WAS TIN PLATED, ADDED CD9 TO CRIMP TOOL COLUMN. NOTE-1C WAS 194°F (90°C)	07695			DISCO 2 PC. VINYL INSULATED, .250 MALE TAB			
03	10/96	TSM	RLS	ADDED DV10-250M-2K	05167	LCA	DBH				
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	DRAWN BY JP	CHK'D	SCALE NONE	DRAWING NO. A41406