

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。


Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets" .

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES :

1. UL LISTED AND CSA CERTIFIED AFTER HEAT SHRINKING FOR:
 - A. 600 V MAX. VOLTAGE RATING
 - B. 257°F (125°C) MAX. TEMP. RATING
 - C. STRANDED COPPER WIRE ONLY (SEE CHART FOR WIRE RANGE)
2. MATERIAL :
 - A. TERMINAL - TIN PLATED COPPER WITH BRAZED SEAM
 - B. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. INSTALLATION TOOL: CT-310

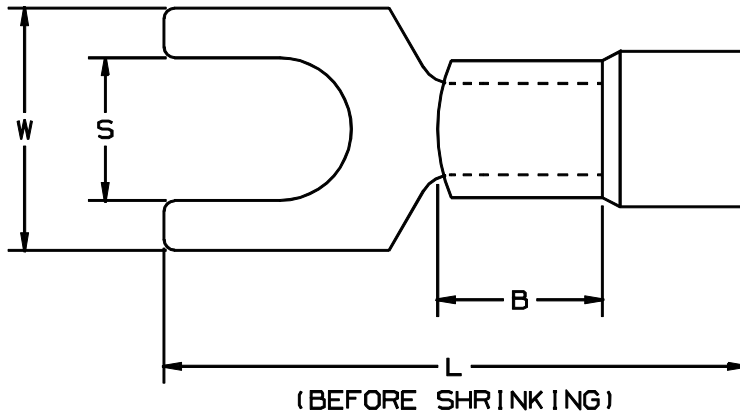

LISTED
587H
E52164



CERTIFIED
73971

PANDUIT PART NUMBER	WIRE RANGE (AWG)	STUD SIZE S	DIMENSIONS			MAX WIRE INSULATION DIA	INSULATION COLOR	STD PKG QTY	BULK PKG QTY
			B	W	L				
PH18-6F	22-18	#6	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH18-8F	22-18	#8	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH18-10F	22-18	#10	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED	25	500
PH14-6F	16-14	#6	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH14-8F	16-14	#8	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH14-10F	16-14	#10	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE	25	500
PH10-8F	12-10	#8	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW	20	200
PH10-10F	12-10	#10	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW	20	200

A41455_01

PANDUIT CORP.

TINLEY PARK, ILLINOIS

01	1/01	RM	
00	2/90	DL	
REV	DATE	BY	CHK

FILESPEC WAS NPC-A41455-00

RELEASED

DESCRIPTION

QA CUST PW APP

DRAWN BY
DRL

CHK'D

SCALE

NONE

DRAWING NO.

A41455

HEAT SHRINK INSULATED
FORK TERMINALS